(a) r >= 0.3 accepts 10-15 % of noise slots and most time-reversed frames

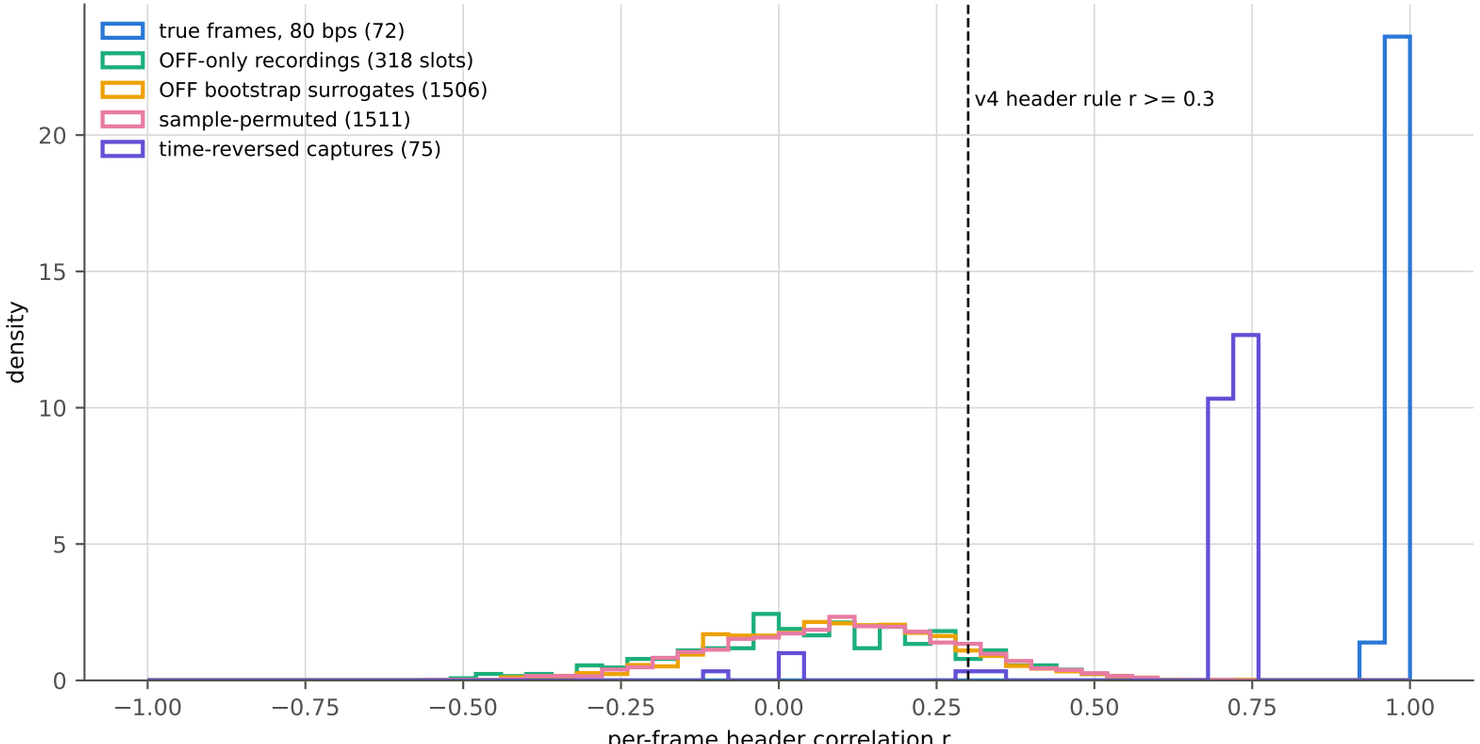

(b) accepted frames per acceptance rule (everything above the last row is a false detection)

data	slots	r >= 0.3	r >= 0.7	hdr errors <= 2
OFF-only (A1-A4), all node choices	318	42	0	0
OFF bootstrap (60 realisations)	1506	192	1	0
sample-permuted (60)	1511	221	1	0
time-reversed (3)	75	70	66	0
tau shifted +-2 bits (real captures)	156	144	-	0
TRUE frames, 80 bps	**72**	**72**	**72**	**72**