

D. Bit-level diagnostics (80 bps validation runs). Grey bands: +-2 ms guard around each inferred bit edge. Green band: +-3 sigma OFF noise. Thick grey bars: per-bit decision value.

random correct 1: run 195109, frame 19, payload bit 126 (margin +0.534, 1 guard-passing sample)

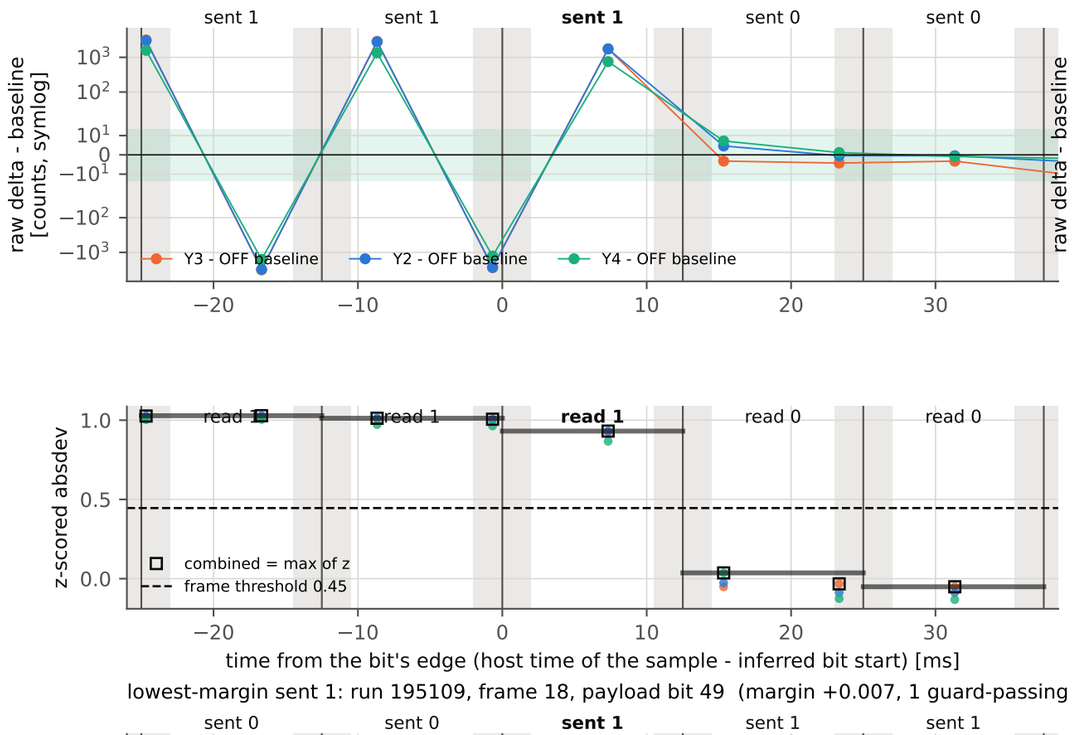


random correct 0: run 195008, frame 21, payload bit 0 (margin +0.484, 1 guard-passing sample)

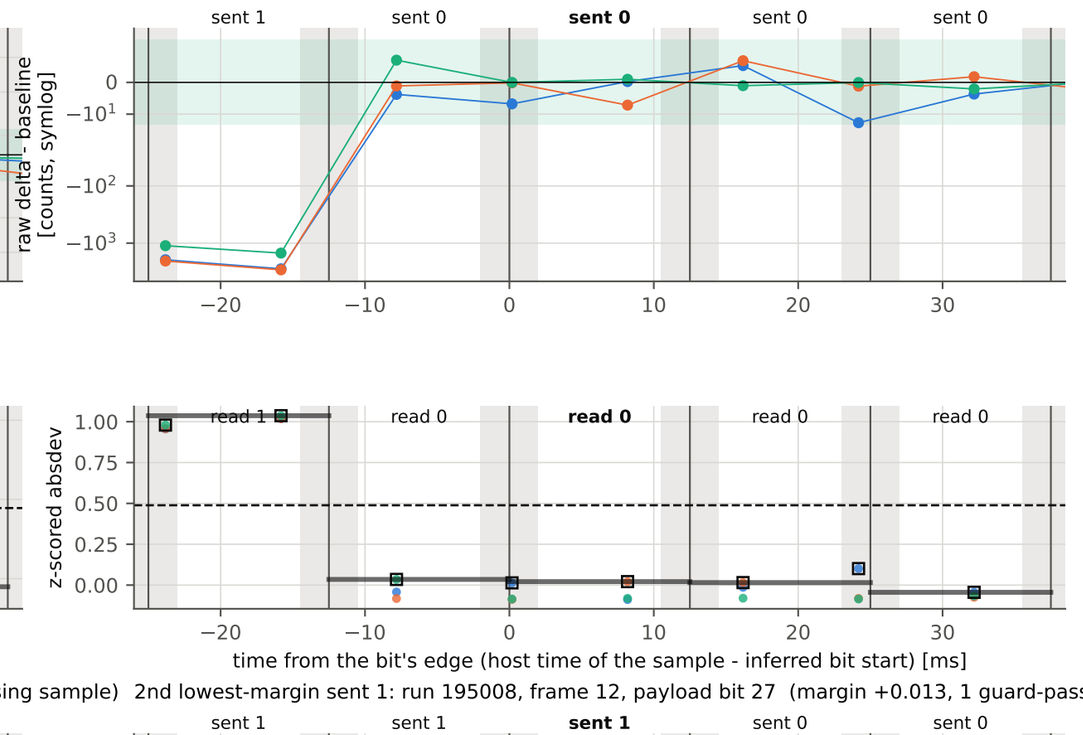


time from the bit's edge (host time of the sample - inferred bit start) [ms]


time from the bit's edge (host time of the sample - inferred bit start) [ms]


lowest-margin sent 1: run 195109, frame 18, payload bit 49 (margin +0.007, 1 guard-passing sample)

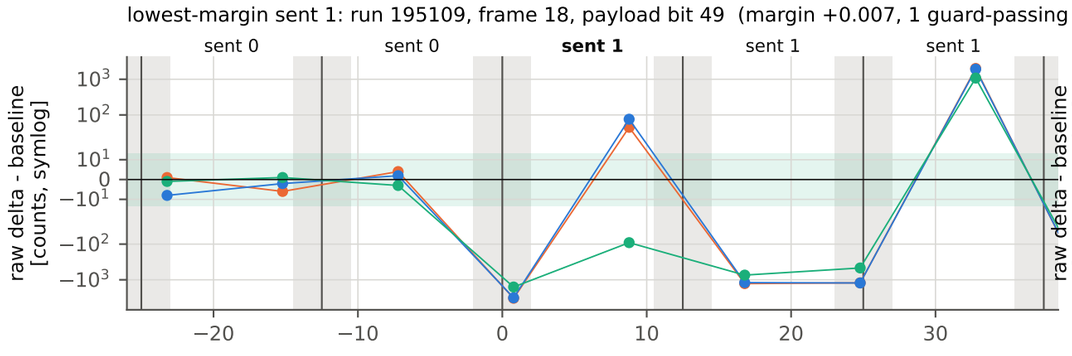

2nd lowest-margin sent 1: run 195008, frame 12, payload bit 27 (margin +0.013, 1 guard-passing sample)

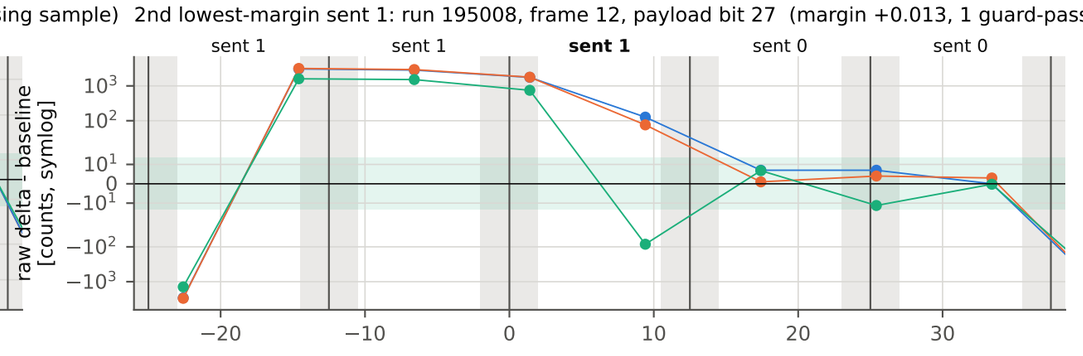

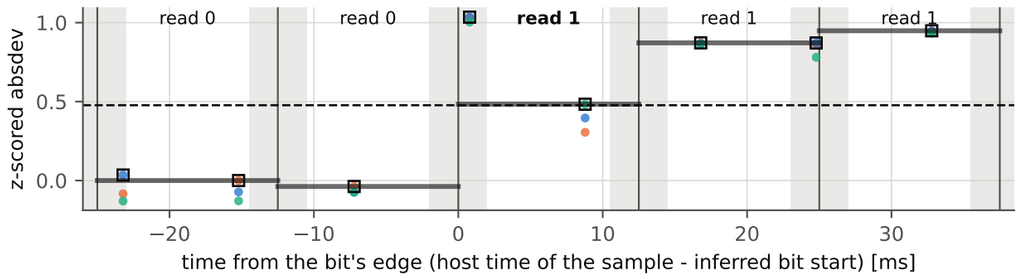


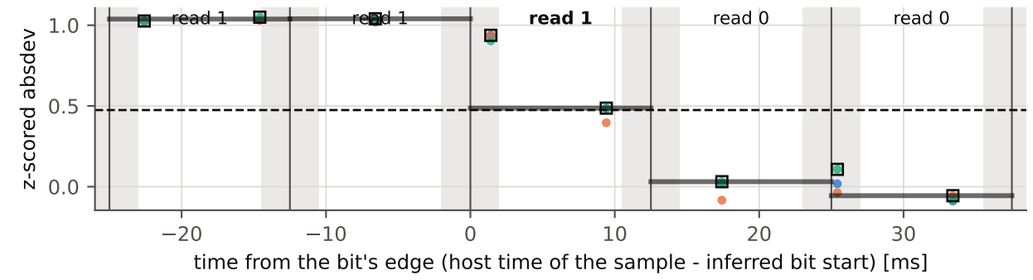


time from the bit's edge (host time of the sample - inferred bit start) [ms]


time from the bit's edge (host time of the sample - inferred bit start) [ms]


lowest-margin 1 -> 0: run 195109, frame 9, payload bit 104 (margin +0.028, 2 guard-passing samples)

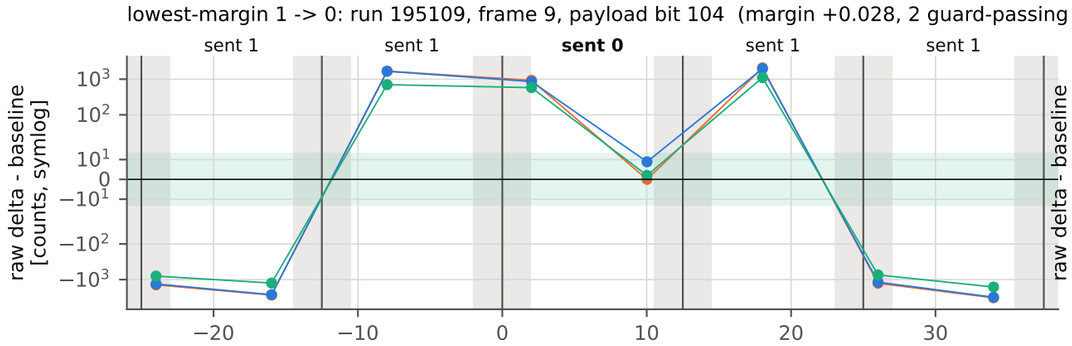

2nd lowest-margin 1 -> 0: run 192702, frame 19, payload bit 21 (margin +0.297, 1 guard-passing sample)

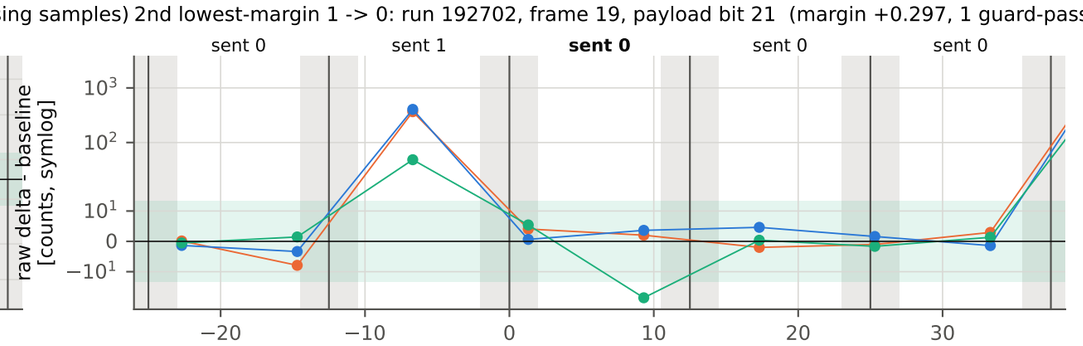

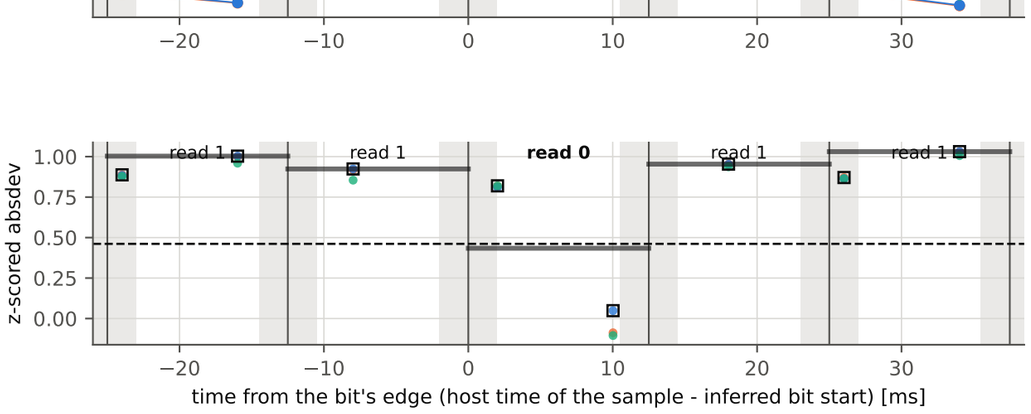


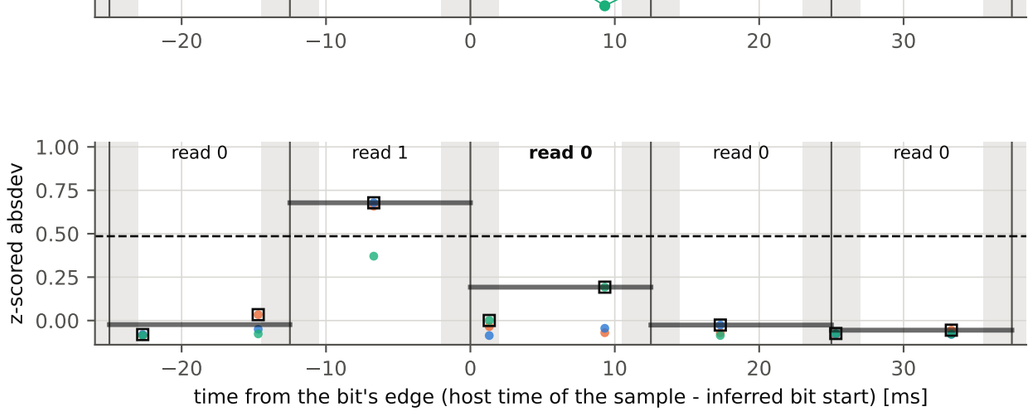


time from the bit's edge (host time of the sample - inferred bit start) [ms]


time from the bit's edge (host time of the sample - inferred bit start) [ms]


random 1 -> 0: run 195109, frame 1, payload bit 43 (margin +0.480, 2 guard-passing samples)

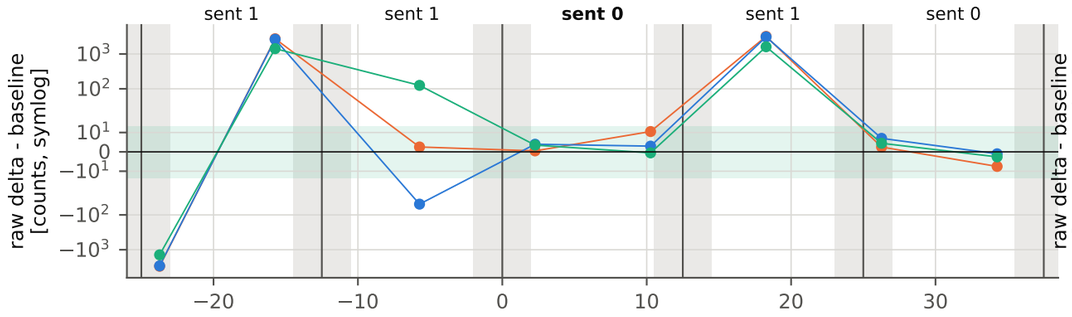

lowest-margin edge-only (fallback) bit: run 195008, frame 21, payload bit 75 (margin +0.231, 0 guard-passing samples)

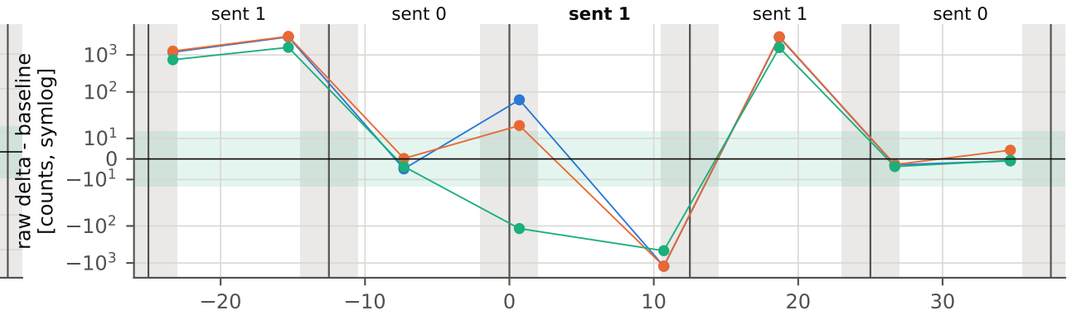

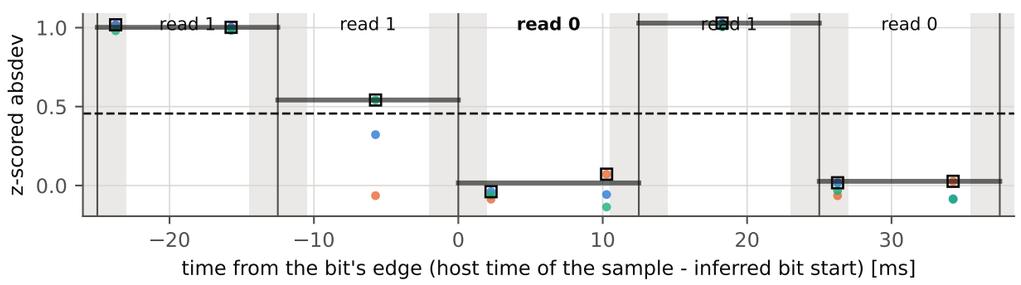

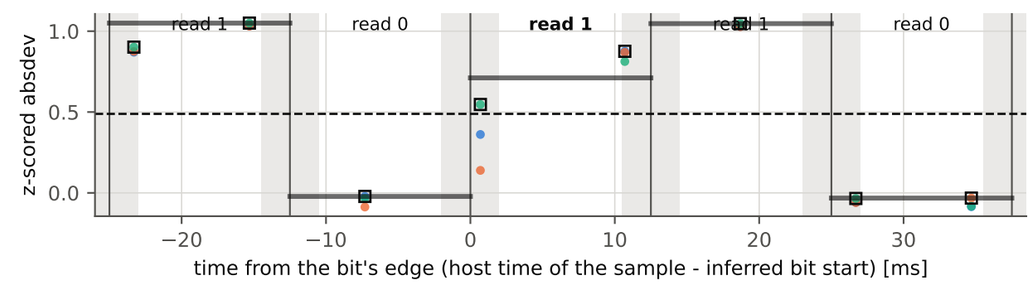

time from the bit's edge (host time of the sample - inferred bit start) [ms]

time from the bit's edge (host time of the sample - inferred bit start) [ms]