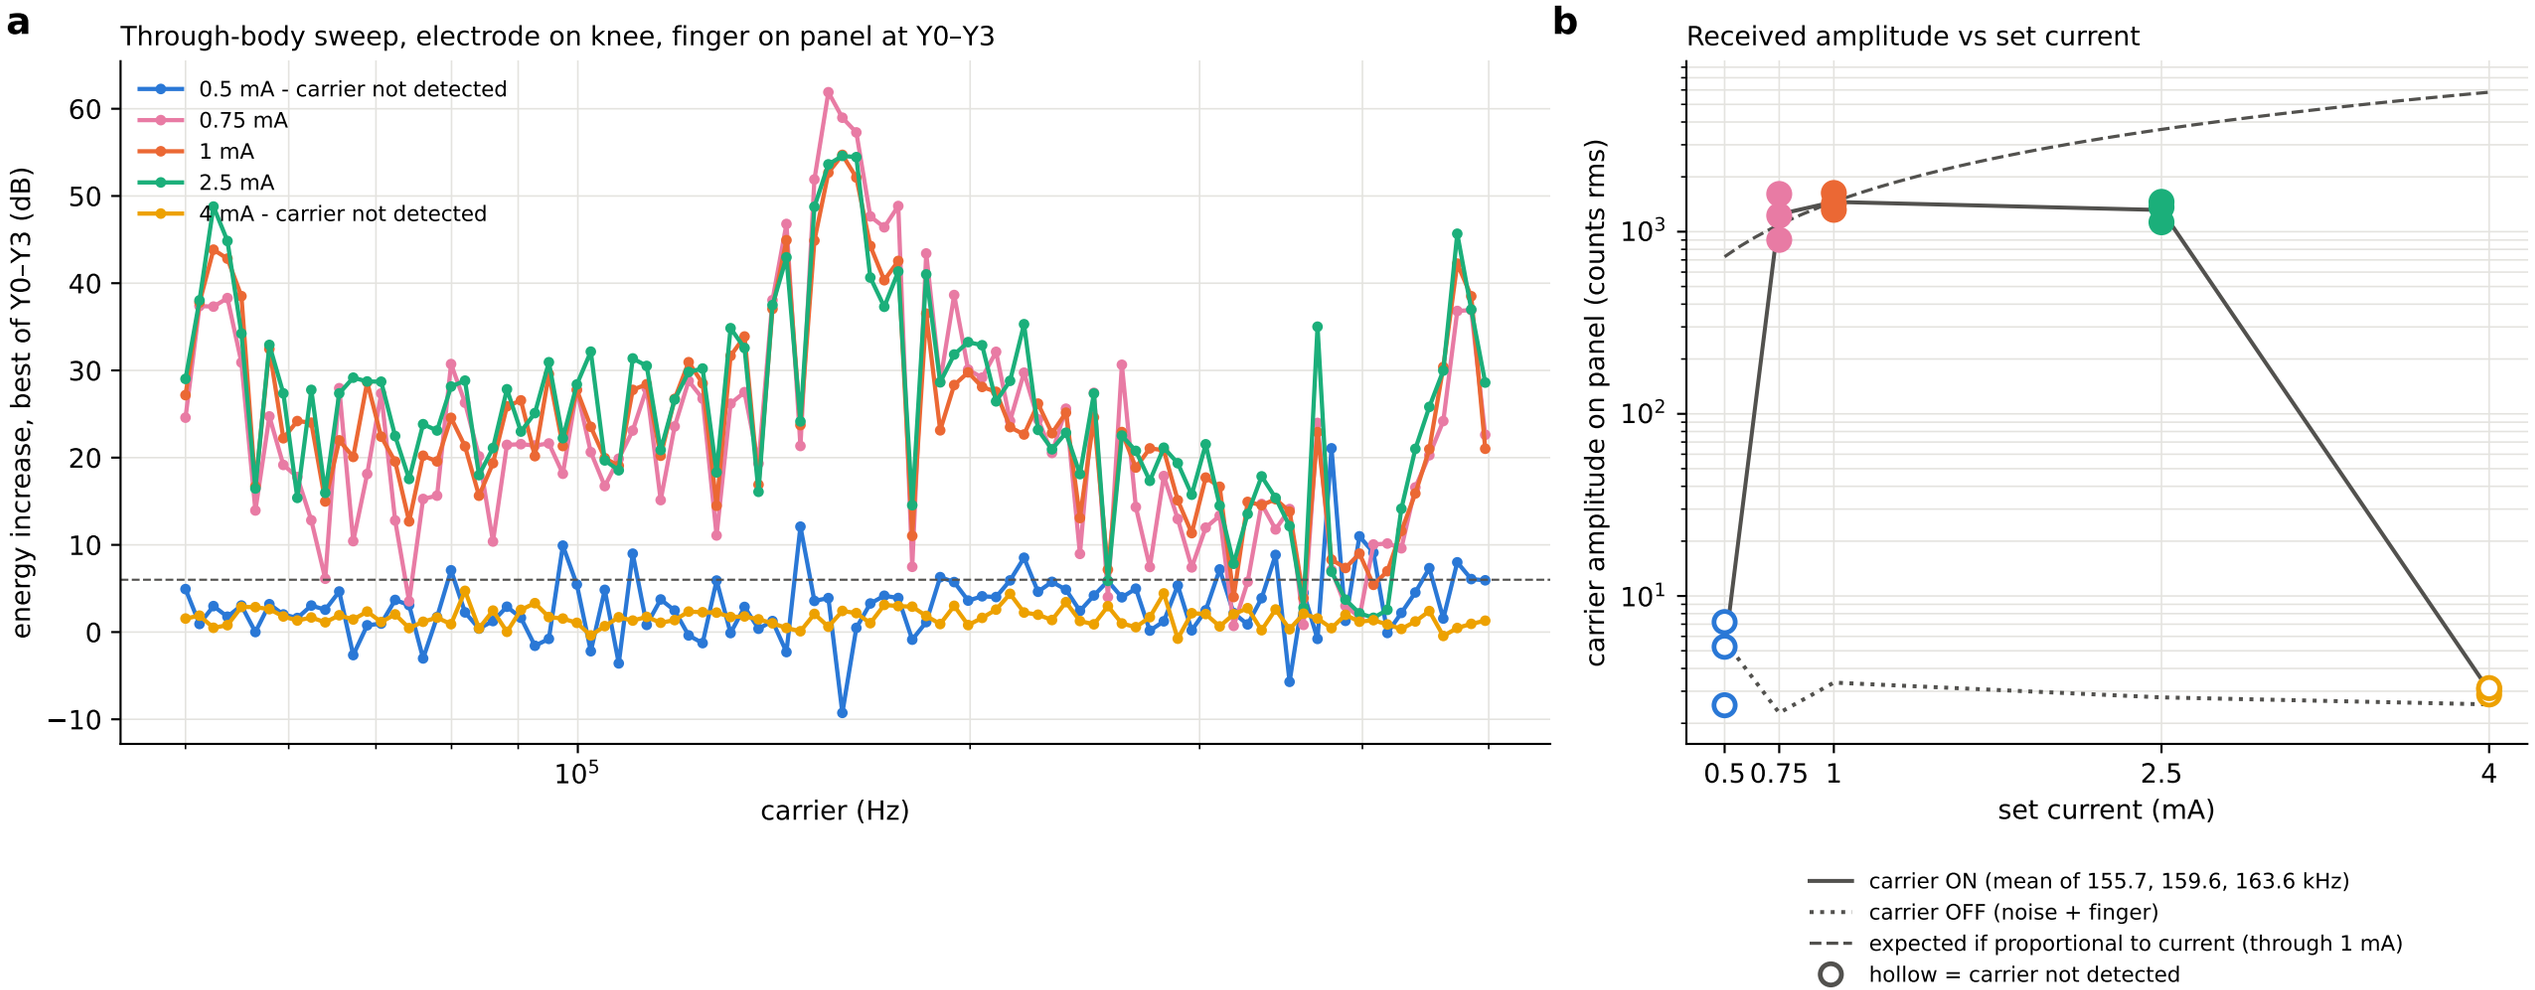
a
Through-body sweep, electrode on knee, finger on panel at Y0–Y3
0.5 mA - carrier not detected
0.75 mA
1 mA
2.5 mA
4 mA - carrier not detected
energy increase, best of Y0–Y3 (dB)
60
50
40
30
20
10
0
−10
10^5
carrier (Hz)
b
Received amplitude vs set current
carrier amplitude on panel (counts rms)
10^3
10^2
10^1
0.5
0.75
1
2.5
4
set current (mA)
carrier ON (mean of 155.7, 159.6, 163.6 kHz)
carrier OFF (noise + finger)
expected if proportional to current (through 1 mA)
hollow = carrier not detected