(a) How the decoders differ (orange = source of artificial errors, green = what removed them)

	Sample timing	Bit window	Feature per sample	Node combining	Rules fixed
Original	Uniform grid, linear interpolation	Fractional grid samples	Chosen per node after decoding; combined: absdev	Weighted mean of z-scores, 3 nodes	Before the runs (recording code)
v3	Uniform grid, linear interpolation	Fractional grid samples	logenergy (change-based) if >= 4 samples per bit, else absdev	Max of z-scores per sample, 3 nodes	Frozen 19:01
v4	Raw samples at their own timestamps	Bit time, samples < 2 ms from an edge skipped	absdev: distance from the OFF baseline (quiet samples)	Max of z-scores per sample, 3 nodes	Frozen 19:16

(b) Same transmitted frame through each decoder: 80 bps validation run 19:27:02, frame 4 of 24, payload bits 40-79 (filled = decided 1; dark outline + x = error; shading = sent 1)

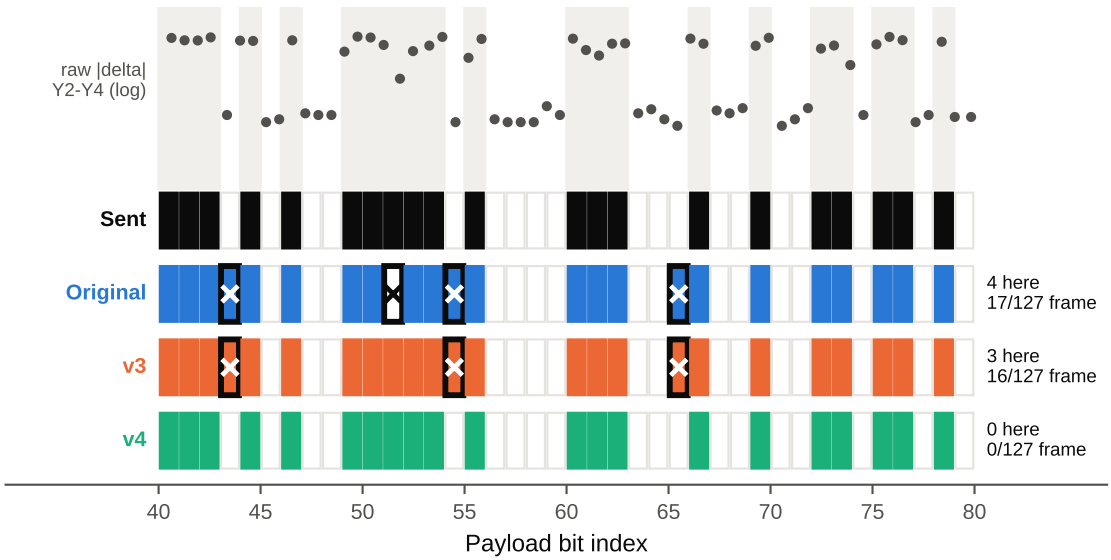
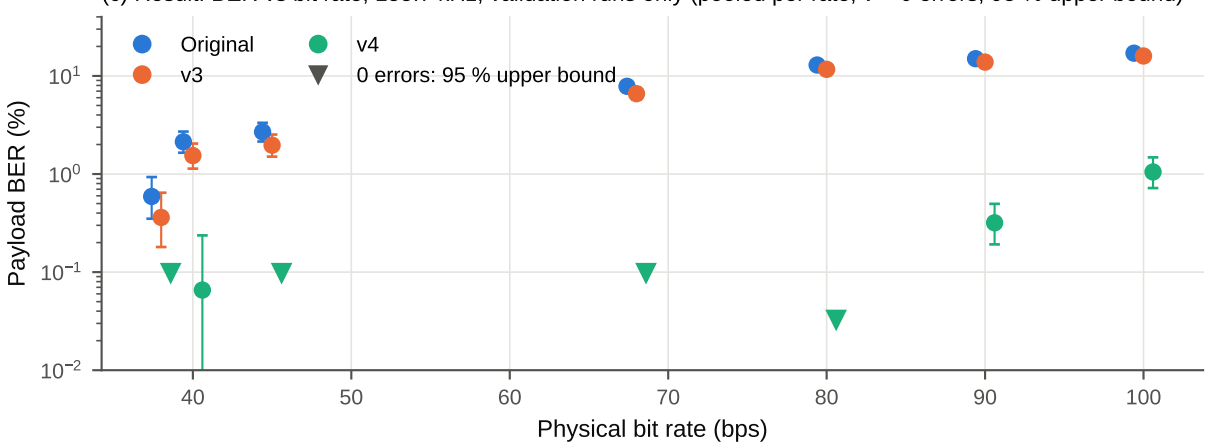
(c) Result: BER vs bit rate, 155.7 kHz, validation runs only (pooled per rate; v = 0 errors, 95 % upper bound)