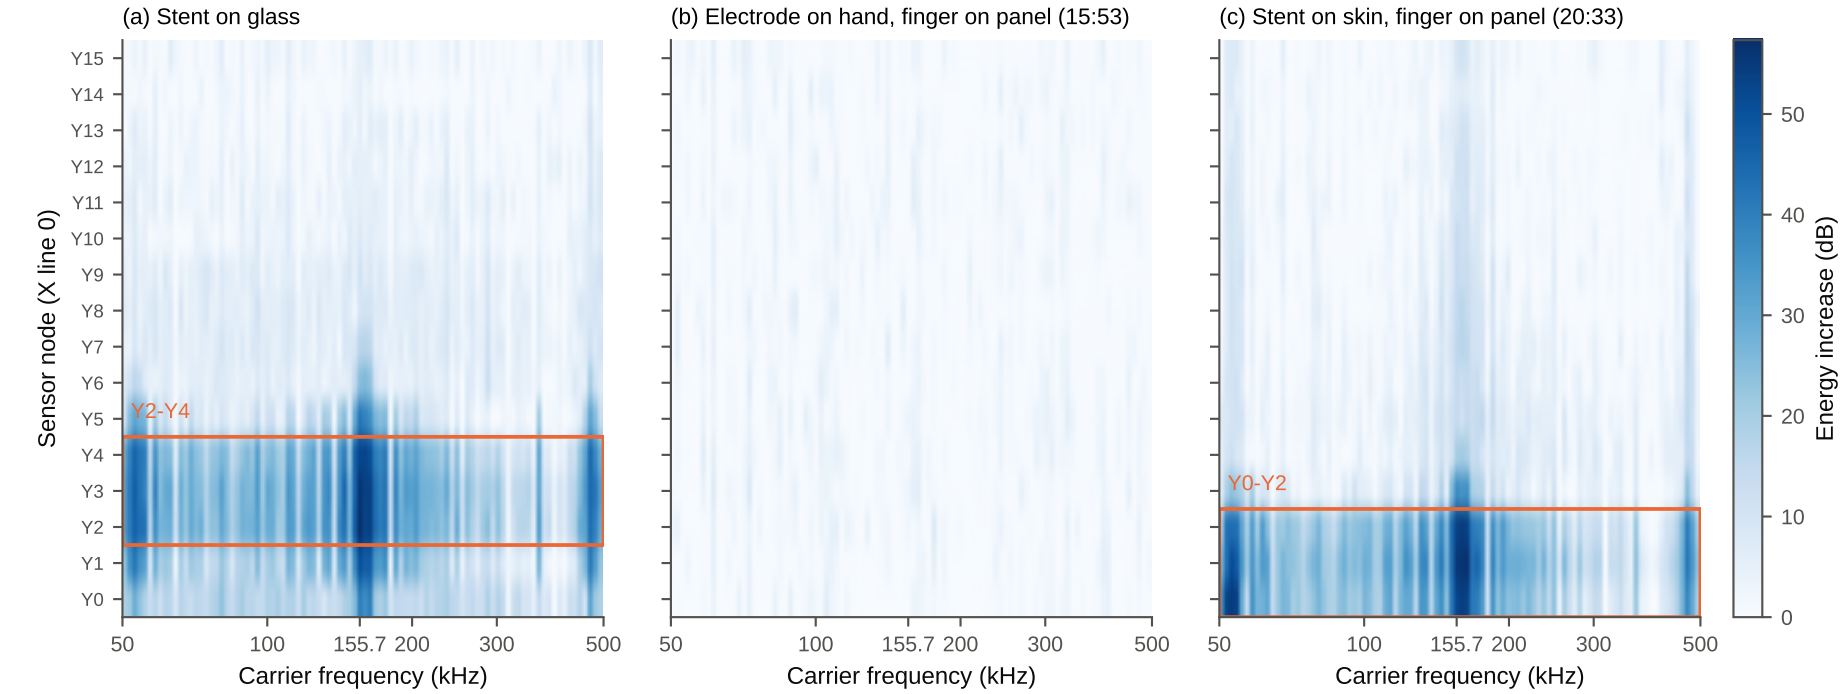

Spatial response per node and carrier, Y0-Y15 shown (orange box = that run's responding nodes at its best carrier; Y16-Y63 at most 17.3 dB in any run)
(a) Stent on glass
(b) Electrode on hand, finger on panel (15:53)
(c) Stent on skin, finger on panel (20:33)
Sensor node (X line 0)
Y15
Y14
Y13
Y12
Y11
Y10
Y9
Y8
Y7
Y6
Y5
Y4
Y3
Y2
Y1
Y0
Y2-Y4
Y0-Y2
50
100
155.7
200
300
500
Carrier frequency (kHz)
Energy increase (dB)
0
10
20
30
40
50