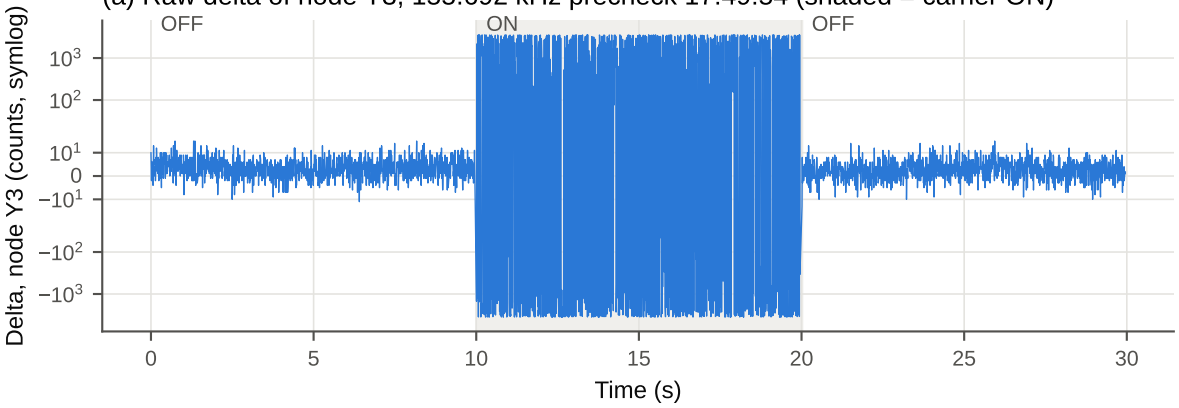
(a) Raw delta of node Y3, 155.692 kHz precheck 17:49:54 (shaded = carrier ON)
OFF
ON
OFF
Delta, node Y3 (counts, symlog)
Time (s)

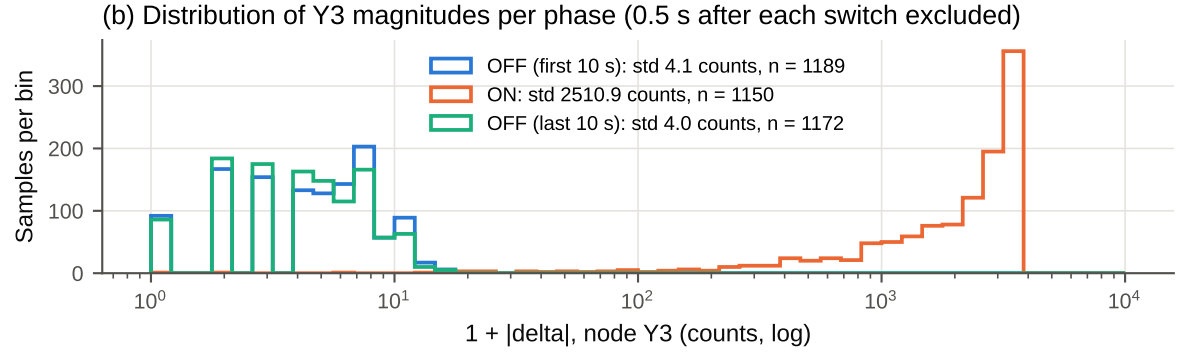
(b) Distribution of Y3 magnitudes per phase (0.5 s after each switch excluded)
OFF (first 10 s): std 4.1 counts, n = 1189
ON: std 2510.9 counts, n = 1150
OFF (last 10 s): std 4.0 counts, n = 1172
Samples per bin
1 + |delta|, node Y3 (counts, log)

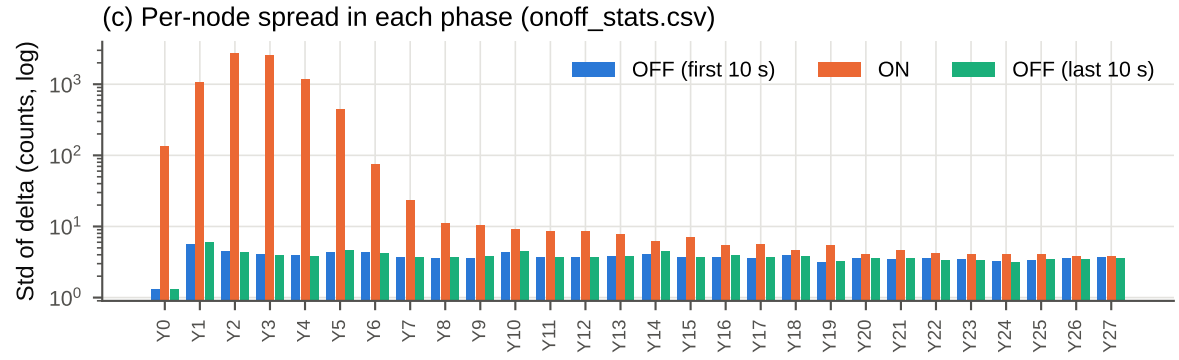
(c) Per-node spread in each phase (onoff_stats.csv)
OFF (first 10 s)
ON
OFF (last 10 s)
Std of delta (counts, log)