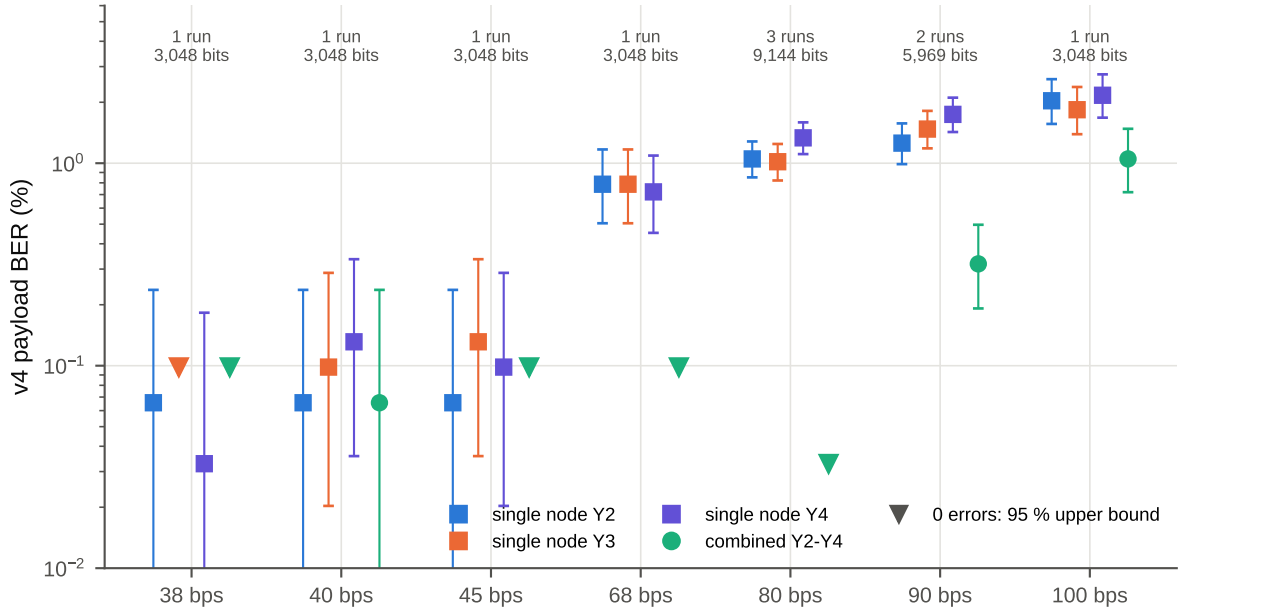
Single node vs combined (per-sample max over Y2-Y4), frozen v4, 155.7 kHz, validation runs pooled per rate
v4 payload BER (%)
10^{0}
10^{-1}
10^{-2}
1 run
3,048 bits
1 run
3,048 bits
1 run
3,048 bits
1 run
3,048 bits
3 runs
9,144 bits
2 runs
5,969 bits
1 run
3,048 bits
single node Y2
single node Y3
single node Y4
combined Y2-Y4
0 errors: 95 % upper bound
38 bps
40 bps
45 bps
68 bps
80 bps
90 bps
100 bps