

Continuum contact models for coupled adhesion and friction

Janine C. Mergel^{1a}, Riad Sahli^b, Julien Scheibert^b, Roger A. Sauer^{2,a}

^a*Graduate School AICES, RWTH Aachen University, Templergraben 55, 52056 Aachen, Germany*

^b*Laboratoire de Tribologie et Dynamique des Systèmes LTDS UMR5513, Ecole Centrale de Lyon, ENISE, ENTPE, CNRS, F-69134, Ecully, France*

Abstract: We develop two new continuum contact models for coupled adhesion and friction, and discuss them in the context of existing models proposed in the literature. Our new models are able to describe sliding friction even under tensile normal forces, which seems reasonable for certain adhesion mechanisms. In contrast, existing continuum models for combined adhesion and friction typically include sliding friction only if local contact stresses are compressive. Although such models work well for structures with sufficiently strong local compression, they fail to capture sliding friction for soft and compliant systems (like adhesive pads), for which the resistance to bending is low. This can be overcome with our new models. For further motivation, we additionally present experimental results for the onset of sliding of an elastomer cap on a smooth glass plate under low normal loads. As shown, the findings from these experiments agree well with the results from our models. In this paper we focus on the motivation and derivation of our continuum contact models. Their implementation in a nonlinear finite element framework as well as the algorithmic treatment of adhesion and friction will be discussed in future work.

Keywords: continuum contact mechanics, van der Waals adhesion, sliding friction, Amontons' law, Coulomb's law, adhesion-controlled friction

1 Introduction

This work is concerned with general contact models for adhesion mechanisms that are characterized by coupled adhesion and friction. Such mechanisms appear in both natural and technical applications; they also include the adhesive microstructures of many insects and lizards, which may resemble either soft adhesive pads (e.g. for flies and beetles), or rather stiff fibrils (e.g. for the gecko). In particular the gecko mechanism has several other remarkable properties: It enables fast detachment, self-cleaning, and non-clumping [6]. To replicate the characteristics of such bio-adhesives, within the last one and a half decades various synthetic materials have been developed [46, 135, 47, 45, 81, 11]. Like their natural counterparts, bio-inspired adhesives are often reusable and removable without leaving any residue. This makes them relevant for different medical applications; other possible applications include climbing robots, micro-electro-mechanical systems, and pick-and-place methods.

Initiated by the study of Autumn et al. [9], it is generally believed that bio-adhesion is mainly caused by van der Waals forces. Nevertheless, also other effects may have an influence, such as capillary [54] or electrostatic forces [56]. Within this paper, we mainly focus on dry adhesion due to van der Waals interactions. As experiments reveal, the function of bio- and bio-inspired adhesives further depends on friction (or “shear”) forces [7, 138]. Thus, the applications discussed so far do not only involve dry adhesion but also dry friction. Combined, adhesion and

¹Email: mergel@aices.rwth-aachen.de

²Corresponding author, email: sauer@aices.rwth-aachen.de

friction play an important role in various other systems; these include small frictional hairs at the legs of insects [68], the peeling of adhesive tapes [2], or elastomer spheres sliding on glass plates [107, 127, 27, 97].

Regarding the adhesion and friction of bio-adhesive systems in general, experiments show that friction forces can occur even if the normal force is negative, i.e., tensile [7, 37, 138]. A similar observation can be made in experiments with chemically modified graphite surfaces [34]. Note that these findings usually refer to the *total* force in the system, while locally the contact stresses may vary between tension and compression within the same macroscopic contact area. This was demonstrated by Eason et al. [40], who used a tactile sensor to investigate the distribution of the normal stress underneath an attached gecko toe.

If an adhesive system has a large stiffness (or low compliance, respectively), its contact surface tends to be characterized by regions of tensile and regions of compressive contact forces. Then, the fraction of compressive and tensile areas is large compared to a more compliant system, which may justify the application of continuum models that capture friction only at the locally compressed parts of the contact area. However, for compliant, tape-like structures or soft adhesive pads (e.g. of insects, see [37]), the assumption of a high stiffness is not realistic.

The continuum models that have been considered for combined adhesion and friction so far include sliding friction only if the local contact stress is positive, i.e., compressive. Although they work well for systems with sufficiently strong (local) compression, they fail to capture sliding resistance for in the cases described above.

For this reason, we propose two general contact models for the analysis of physical problems that are characterized by coupled adhesion and friction. The first contact model is based on a constant sliding threshold within the contact area, which means the sliding shear is independent of the local distance of the contacting surfaces. This model turns out to be favorable for low normal loads, when friction is purely adhesion-controlled. The second model can be considered as a local version of Amontons' law extended to adhesion. Both models are capable of capturing the frictional behavior for zero or negative (i.e. tensile) contact pressure. This approach is motivated by findings for soft and compliant bio-adhesive pads, which are able to generate friction forces under tensile normal loads. We additionally present new experimental results for the onset of sliding of a smooth elastomer sphere on a glass plate. As shown, the findings from these experiments agree well with the results for the proposed models. Our contact models are formulated in the framework of large deformations, and apply to arbitrary geometries. For many applications this requires applying computational methods for analysis. An implementation of the proposed models in the framework of nonlinear finite element methods is addressed separately [75, 77].

Note that in the following we will also refer to the terms *sticking* for static friction, and *sliding* for kinetic (or dynamic) friction, respectively.

The remainder of this paper is structured as follows. In Sect. 2 we discuss various mechanisms that may contribute to dry adhesion and friction, and outline existing modeling approaches. We then present new experimental results for adhesive friction of a smooth elastomer sphere on glass; see Sect. 3. In Sect. 4 we present the two proposed models for coupled adhesion and friction, and discuss their general behavior. Sect. 5 then provides a comparison of the model with the experiments, and Sect. 6 concludes this paper.

2 Origin and modeling of adhesive friction

This section provides an overview of relevant experimental findings, theoretical models, and computational approaches that have been proposed in the past.

2.1 Adhesive and non-adhesive friction

Like adhesion, dry friction may stem from (combinations of) different mechanisms at smaller length scales. This depends on the involved materials, surface properties, and the considered length scale. Mechanisms that contribute to friction are classified in [80] as follows: 1) adhesion; 2) deformation of asperities; 3) plastic deformation at the interface; 4) fracture; 5) interlocking; and 6) wear or contamination particles between the surfaces. Another possible mechanism is viscous dissipation in the material, e.g. for rubber or various tissues. Although sliding friction may be caused by a mixture of these mechanisms, in engineering applications it is often described by the well-known formula

$$F_t = \mu F_n, \quad F_n > 0, \quad (1)$$

where μ is the coefficient of sliding friction, which relates the normal and tangential forces, F_n and F_t , to each other. Eq. (1) results from the following three laws, which were named after Guillaume Amontons and Charles de Coulomb:

- 1) The friction force is proportional to the applied normal load. (Amontons' 1st law)³
- 2) The friction force is independent of the apparent contact area. (Amontons' 2nd law)
- 3) The friction force is independent of the sliding velocity.⁴ (Coulomb's law)

We will refer to relation (1) also as *Coulomb-Amontons friction*. The three laws stated above can be interpreted by introducing both an apparent (nominal) and a real (true) contact area, A_{real} , and assuming that compressive contact occurs only between small microasperities. Such an approach goes back to Refs. [35, 18, 5], and explains the apparent contradiction in several experiments showing the friction force to be proportional to the contact area [108, 41]. In many applications, Eq. (1) describes frictional sliding of the system appropriately. Nevertheless, for considerably smooth surfaces or soft materials (such as polymers), Eq. (1) may not be valid anymore [87]. This was also shown for smooth elastomer contacts, see e.g. [27, 97].

In his study of adhesion and friction of crystal layers, Derjaguin [35] used statistical analysis to derive a generalization of Amontons' first law,

$$F_t = \mu (F_0 + F_n) = \mu A_{\text{real}} (p_0 + p_n). \quad (2)$$

Here, $p_n := F_n/A_{\text{real}}$ is an averaged normal pressure, and $p_0 := F_0/A_{\text{real}}$ is an adhesion parameter. After introducing a material-specific, critical shear stress $\tau_0 := \mu p_0$, Eq. (2) becomes

$$F_t = \tau_0 A_{\text{real}} + \mu F_n = \tau A_{\text{real}}, \quad \tau := \tau_0 + \mu p_n. \quad (3)$$

This will be referred to as *extended Amontons' law*. According to Ref. [94], Eq. (2) describes the friction force between dry surfaces that slide smoothly over each other in the presence of adhesion. For low normal loads, the first term in Eq. (3) predominates, which is called *adhesion-controlled* friction. For large normal loads, the second term (equivalent to Eq. (1)) predominates,

³Note that in engineering mechanics, this is often referred to "Coulomb's law" or "Coulomb friction" instead.

⁴According to Ref. [80], Coulomb stated this relation for intermediate velocities.

which is denoted *pressure-controlled* friction.⁵ The influence of both terms strongly depends on the specific application, and in particular on the smoothness, compliance, and adhesion of the contacting surfaces. This is demonstrated by the experimental results [53] shown in Fig. 1. For

Removed for license reasons from arXiv preprint. See Fig. 4(a) in Ref. [53].

Removed for license reasons from arXiv preprint. See Fig. 4(b) in Ref. [53].

(a) Uncoated surfaces.

(b) Surfaces coated with calcium stearate.

Figure 1 Friction force and contact area measured for two mica cylinders sliding over each other in dry air. Dashed arrows indicate the transition between adhesion- and pressure-dependent friction.

two molecularly smooth (and initially undamaged) mica cylinders sliding over each other, the friction force is directly proportional to the contact area; $F_t = \tau_0 A_{\text{real}}$. This means that with increasing normal load, the friction force follows the triangles in the figure. At a sufficiently high normal load, damage occurs and forms wear particles at the interface. Afterwards, the normal load is decreased again. From that moment on, the friction force is proportional to the normal load according to Eq. (1), and not to the contact area anymore; see the filled circles in Fig. 1. As a comparison of Fig. 1(a) and Fig. 1(b) reveals, it depends on the specific parameters whether either adhesion- or pressure-controlled friction provide larger friction forces. The transition between adhesion- and pressure-controlled friction is further discussed in Refs. [13, 44, 57].

Eq. (3) has been considered in various research fields, sometimes with a different terminology. It had already been discussed in a similar form before Derjaguin [35], also by Coulomb himself [44]. What he proposed was a fracture criterion for granular and brittle materials, known as the Mohr- or Navier-Coulomb criterion, respectively [31, 88]. Besides, Tabor [115] used Eq. (3) to derive a pressure-dependent friction model with an effective coefficient of sliding friction, $\hat{\mu} := F_t/F_n = \tau_0/p_n + \mu$. Extended Amontons’ law was further discussed in Refs. [21, 117, 134]. It also appeared in the context of microtribology [20, 14, 94], molecular dynamics simulations [44, 113, 78], and adhesive friction of bio- and bio-inspired systems [136, 52].

2.2 Existing modeling approaches

In the following, we give an overview of the most relevant models for dry adhesion and friction, with a special focus on continuum methods that are suitable for computational formulations. For a discussion of friction and tribology from a physical point of view, we refer to monographs [84, 16]. In addition, different aspects of nanotribology are addressed in book [15]. A recent review on modeling and simulation in tribology is given in Ref. [124]. For an overview of computational models for adhesion, see also [100].

In order to model adhesion (and repulsion) due to van der Waals interactions, various continuum

⁵In [94] the expression “load-controlled” is used.

models have been developed based on the Lennard-Jones (LJ) potential

$$\phi(r) = \varepsilon \left(\frac{r_0}{r} \right)^{12} - 2\varepsilon \left(\frac{r_0}{r} \right)^6. \quad (4)$$

Here, ϕ is the potential between two molecules separated by the distance r ; it depends on the parameters ε and r_0 , which denote the depth of the potential well and the molecular equilibrium distance, respectively. In order to increase the efficiency of computational models based on Eq. (4), the interactions between two (in general arbitrarily shaped) bodies are often approximated by effective volumetric forces (with unit N/m³) or effective surface tractions (with unit N/m²). Such an approach is pursued in various computational formulations [104, 38, 106, 137, 58, 59, 42].

In general, models based on the Lennard-Jones potential do not contain any contribution due to friction. For this reason, Deng et al. [34] additionally consider a constant tangential contact stress during sliding wherever the normal contact stress is compressive. This corresponds to the first term in Eq. (3), and thus shows similarities to one of our proposed models (Sect. 4.2.1). Apart from that, Jiang and Park [60] propose to extend the original Lennard-Jones potential by an additional “friction potential” in order to describe the friction properties of layered materials such as graphene. However, this approach is restricted to static friction.

Van der Waals forces can also be modeled by fitting traction-separation laws within a cohesive zone model; see e.g. Refs. [131, 83, 103, 105]. Although these papers use models that do not include tangential sliding, there also exist numerous cohesive zone models that also include sliding friction. In early works [122, 70], sliding friction according to Coulomb and Amontons was modeled subsequently after full tangential debonding. More recent cohesive zone models account for sliding friction also during partial separation [23, 93, 33, 114]. Besides, there exist several cohesive zone models including friction, which are based on representative interface or volume elements [1, 96, 95, 51].

In all of the cohesion models discussed so far, the damage caused by debonding is considered to be irreversible. This, however, is not realistic for van der Waals interactions. Schryve [112] and Cocou et al. [26] thus modified model [92] to capture partial recovering (“healing”) of the adhesive strength when the gap between the interfaces is closed again. Schryve applied this approach to investigate adhesion and friction between elastomer and glass.

Macroscopic adhesion and friction can also be modeled by statistical homogenization of the microscopic contact behavior [128]. Tworzydło et al. [123], for instance, combined finite element simulations of small surface asperities with statistical analysis, mainly focusing on metallic surfaces. In that study adhesion was modeled with an integrated Lennard-Jones potential. Besides, there exists a recursive multiscale approach [129] to investigate contact of rubber and rough, rigid surfaces (like tire-road contact). This model captures van der Waals interactions by means of a fitted cohesive zone model, and restores adhesion fully when contact is re-established.

For completeness we also outline the most relevant models for non-adhesive friction. In a general continuum framework, sliding law (1) is usually stated in terms of the normal and tangential contact tractions, t_n and \mathbf{t}_t ,

$$\|\mathbf{t}_t\| = \mu t_n, \quad t_n > 0. \quad (5)$$

In many engineering applications it is sufficient to consider the coefficient of sliding friction, μ , as a constant parameter for the material pair at the interface; see e.g. Refs. [25, 119, 3, 4, 133]. Depending on the application, however, μ may be affected by the sliding velocity [50, 130], contact pressure [110], temperature [50], or microscopic time scales [109, 116]. For an overview of approaches suitable for different kinds of materials see Ref. [128]. In addition, there exists also the class of rate-and-state models (see e.g. [12]), which further depend on contact duration

and contact wear. Such models are usually applied to investigate earthquakes and seismic activities [84, 64].

Note that both the friction and the cohesive zone models discussed above include sliding friction only under local compression. This means that after tangential debonding, frictionless sliding occurs if the normal contact stresses are tensile.

Next, we outline the most relevant small-deformation models for adhesion and friction. Regarding the frictionless adhesion of spheres, these include the well-known JKR [63] and DMT [36] models, which apply to compliant and stiff materials, respectively. Both models were later combined in Ref. [73]. Although these models are restricted to small deformations and special contact geometries, they have been successfully applied to fit experimental data. In the experimental results shown in Fig. 1, for instance, the contact area agrees well with that predicted by the JKR theory. For adhesion-controlled friction, it is then possible to determine the frictional shear stress τ_0 (a material-pair parameter) from sphere-plane contact as follows: 1) Predict the real contact area, A_{real} , with the JKR theory by inserting Young's modulus, the sphere radius, the applied normal load, and the interfacial adhesion energy; 2) measure the friction force, F_t ; and 3) combine both values using $F_t = \tau_0 A_{\text{real}}$; see also Sect. 3. In Ref. [107], the JKR theory was extended further to incorporate the influence of tangential shearing. According to that model, for a fixed normal force, the contact area decreases with increasing tangential force. This agrees with the experimental findings presented therein. Related studies and important extensions include Refs. [61, 62, 127].

As mentioned in Sect. 2.1, friction may be explained by small asperities sliding over each other. Such models have been applied to study friction not only between macroscopic rough surfaces [19, 120, 121], but also between molecularly smooth surfaces, and go back to models [89, 118]. Asperity-based friction models generally differ in the surface shape and the number of involved length scales; examples include periodic and wavy substrate, fractal surfaces, or stochastic profiles. Note that such approaches are also used in many of the papers outlined in Sect. 2.1, in particular to verify a linear relation between the real contact area and the normal force (see also [72, 85, 10]). Asperity-based models are not only used to investigate friction, but also adhesion. Multiasperity contact was combined both with the JKR [43] and DMT theory [24, 74]. Further extensions include Refs. [49, 91]. Like asperity-based friction models, models for rough surface adhesion can be based e.g. on a single layer of wavy asperities or on single- and multiscale fractal surfaces, respectively [82, 79]. For an overview see also Ref. [86].

Finally, there exists the analytical tape model [65] by Kendall, which was also extended numerous times to investigate directional peeling of thin strips or tapes. Some of these models also incorporate sliding friction. As experiments show, approaches of this type are suitable to accurately capture the peeling force of structures with small bending stiffness; these include elastomer films [28], adhesive tape [30], and adhesive beetle pads [67]. These models are thus often applied to discuss the properties of bio-adhesive systems. For adhesive fibrils with finite bending stiffness, however, such models may underestimate the actual peel-off force considerably [99, 76].

3 Experimental results for sliding of a smooth elastomer sphere

We now present new experimental results for the onset of sliding of a smooth polydimethylsiloxane (PDMS) sphere on a smooth glass plate under low normal loads. Our experimental setup, inspired by Ref. [90] and fully described in Ref. [97], is illustrated in Fig. 2. As shown, the glass plate is attached to a double cantilever, which can deflect in the vertical direction (vertical

stiffness 410 ± 20 N/m). The other end of the cantilever is mounted on a vertical translation stage (not shown), which allows the glass plate to be brought into and out of contact with the elastomer sphere. First contact is found by very slowly moving the double cantilever down and stopping as soon as the sphere snaps into adhesive contact with the glass. Going further down allows to obtain interfaces with increasing initial contact areas. The vertical displacement is then kept constant during the experiments. Interestingly, once first contact has been formed, it is possible to move the double cantilever back up some distance without losing contact. This allows us to obtain interfaces in a global tensile state.

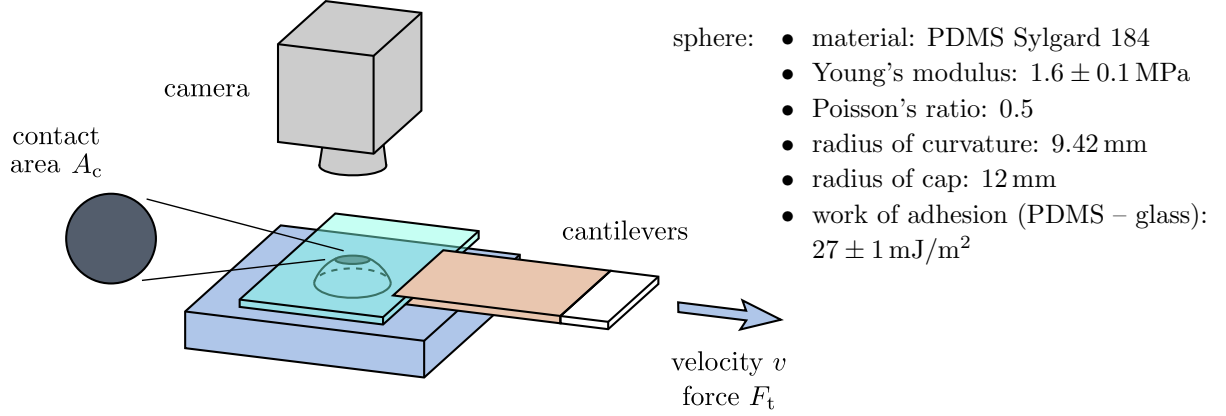


Figure 2 Monitoring of the incipient sliding of an elastomer sphere on a glass plate: Sketch of the experimental setup.

The vertical translation stage itself is mounted on a motorized horizontal translation stage, enabling motion of the glass plate at a constant velocity $v = 0.1$ mm/s. We measure the time evolution of the tangential load, F_t , by means of a load sensor (resolution ca. 1 mN). In synchronization, we monitor the time evolution of the contact area, A_{real} , by analyzing the reflection images of the contact interface (see the method described in [97]). A typical evolution of the contact area is shown in the snapshots of Fig. 3. As one can see, with increasing tangential loading, the area shrinks along the loading direction, both at its left and right edges, while the peeling front on the left moves faster than the one on the right.

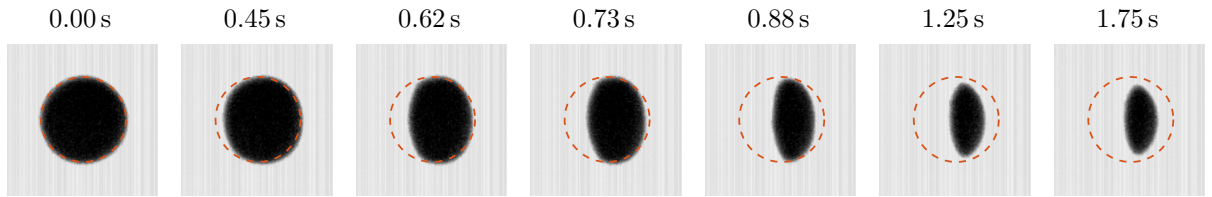


Figure 3 Incipient sliding of a glass plate on an elastomer sphere: Snapshots of the contact area for an initial area of 0.27 mm^2 , which is the upper yellow curve in Fig. 4(b); the sphere is fixed with respect to the frame of the camera, while the glass plate moves to the right.

Fig. 4(a) shows the tangential force, F_t , as a function of time, for different initial contact areas. Here, the origin of time is taken when the motor starts moving. For each curve, the typical behavior is the following: F_t increases, first almost linearly and then with a weakening slope, reaches its maximum (the static friction peak), and rapidly drops afterwards before entering a slow decay during macroscopic sliding. This slow decay, arising from a small residual angle between the glass plate and the horizontal, was negligible in Ref. [97]. Here, it is detectable because of the (about 20 times) smaller initial areas and the (about 8 times) stiffer cantilever.

The time evolution of the contact area, A_{real} , is shown in Fig. 4(b). As shown in Refs. [107, 127, 97], A_{real} decreases as the interface is progressively sheared. The rate of area decrease (i.e., the slope of the curve) significantly drops when the contact enters macroscopic sliding. The subsequent slow decrease of the area is the counterpart of the slow decrease of the sliding friction force. Consistently with Ref. [127], contacts with the smallest initial areas (below about 0.1 mm^2) abruptly vanish upon shearing, without entering a macroscopic sliding regime. In contrast, the contacts with the highest initial areas (above about 0.19 mm^2) do not vanish during the time window shown in Figs. 4(a) and 4(b). For each experiment, this time window covers the time that is necessary to reach the static friction peak (squares in Figs. 4(a) and 4(b)), and to slide further by a distance that is equal to half of the width of the contact area when the force becomes largest.

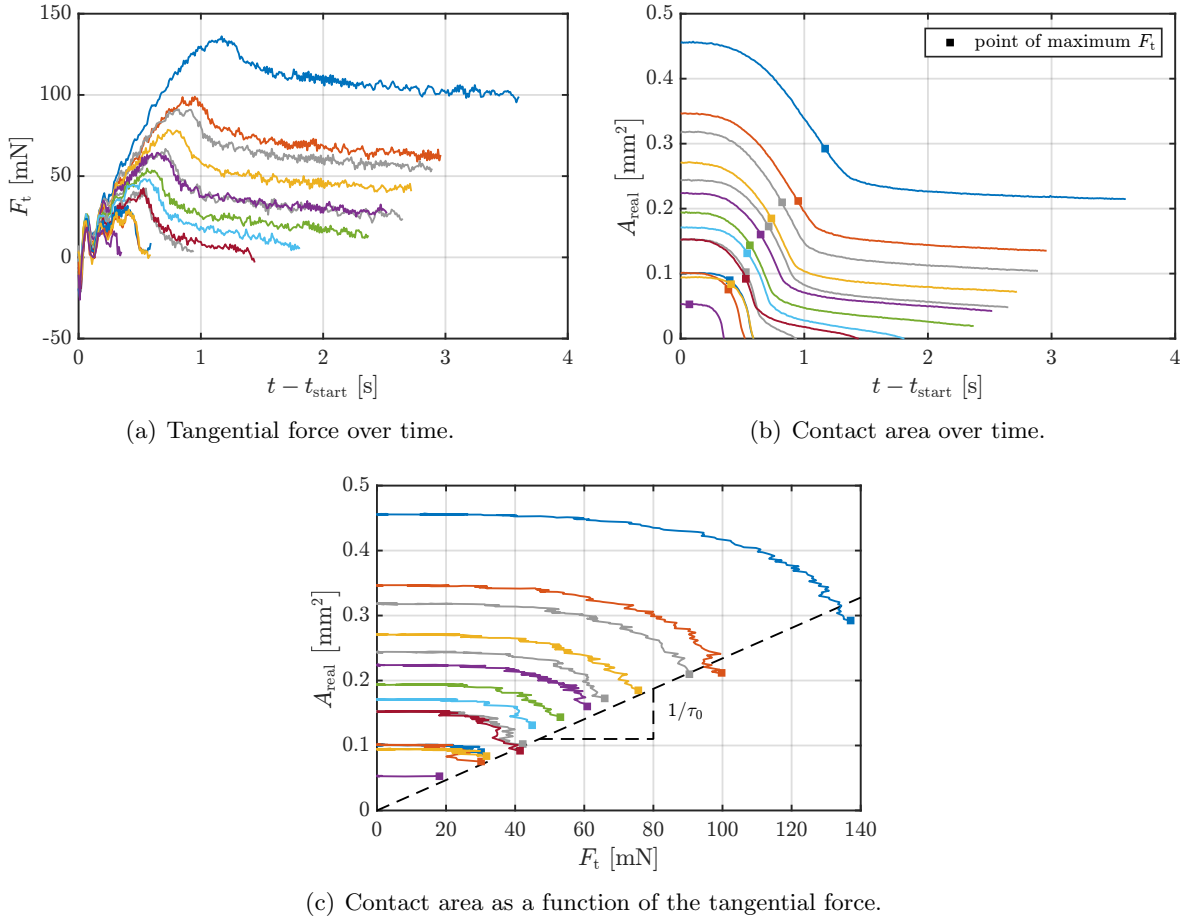


Figure 4 Sliding of an elastomer sphere on a glass plate: Friction force and contact area measured under low normal loads; the squares in Figs. (b) and (c) indicate the states with maximum F_t (see Fig. (a)); the driving velocity is $v = 0.1 \text{ mm/s}$.

Fig. 4(c) shows the dependency between the contact area and the tangential force in the incipient loading phase, before the friction peak is reached. As can be seen, at the onset of sliding (see the squares) the friction force and the contact area are, to a good approximation, proportional to each other. This is consistent with experimental results on identical smooth sphere/plane contacts [97], albeit for much larger contacts. It is also consistent with experiments on rough contacts involving soft materials (see e.g. [130, 32, 132, 97]).

As our results demonstrate, considering the shear stress to be constant during sliding is a

reasonable assumption when modeling friction of soft and smooth surfaces. It further agrees well with observations for adhesion-controlled friction, when $F_t \approx \tau_0 A_{\text{real}}$ according to Eq. (3). For the present experiments, we measure a value of $\tau_0 = 0.43 \pm 0.01$ MPa (see Fig. 4(c)).

4 Models for adhesive friction

Before formulating adhesive friction between two arbitrary objects mathematically, we must first quantify the separation of their surfaces appropriately. To this end, we conceptually introduce variables for the distances in normal and tangential directions following classical contact formulations [69, 128]. Using a common notation in continuum mechanics (see e.g. [17]), we use uppercase letters for variables defined in the *reference* configuration of a body, and small letters for variables in the *current* configuration.

For a given point \mathbf{x}_k on the contact surface of one of the two bodies \mathcal{B}_k , $k = 1, 2$, we first introduce its closest neighbor (or *projection point*), \mathbf{x}_ℓ^p , on the contact surface of the opposing body \mathcal{B}_ℓ , $\ell = 2, 1$. At \mathbf{x}_ℓ^p , the outward unit normal vector of the surface is denoted \mathbf{n}_p . Once these quantities are determined, we define a normal gap vector, \mathbf{g}_n , as well as a (scalar) signed normal gap, g_n , as

$$\mathbf{g}_n = \mathbf{x}_k - \mathbf{x}_\ell^p, \quad g_n = \mathbf{g}_n \cdot \mathbf{n}_p. \quad (6)$$

In addition, we conceptually introduce a vector for the tangential slip, \mathbf{g}_t , which reduces to the scalar g_t for 2D problems. This quantity contains the magnitude and direction of the tangential displacement between the two surfaces. The normal and tangential gaps, g_n and \mathbf{g}_t , as well as the normal vector, \mathbf{n}_p , will be used to derive and illustrate our new contact models. Their computation is addressed e.g. by Sauer and De Lorenzis [101, 102], while the algorithmic treatment of combined adhesion and friction is discussed by Mergel et al. [75, 77].

4.1 Adhesive and repulsive contact

In order to describe general adhesion and repulsion between the two bodies under large deformations, we consider the coarse-grained contact model (CGCM) [98, 104, 106]. This model is derived by first integrating the Lennard-Jones (LJ) potential from Eq. (4) over one of the two bodies (index ℓ), assuming that its surface appears flat in the range of ϕ . This yields a volumetric force (with unit N/m³), which acts at each point within the other body (index k). In a second step, this body force is projected onto the surface of body \mathcal{B}_k to obtain the contact traction (with unit N/m²)

$$\mathbf{T}_{n,k} = \frac{\theta_k}{J_\ell} T_n(g_n) \mathbf{n}_p, \quad T_n(g_n) = \frac{A_H}{2\pi r_0^3} \left[\frac{1}{45} \left(\frac{r_0}{g_n} \right)^9 - \frac{1}{3} \left(\frac{r_0}{g_n} \right)^3 \right]. \quad (7)$$

Note that this contact law is stated in the undeformed *reference* configuration. As can be seen in Fig. 5, T_n can be split into a repulsive (power 9) and an attractive (power 3) term. In Eq. (7), the parameter $A_H = 2\pi^2 \beta_{01} \beta_{02} \varepsilon r_0^6$ is the Hamaker constant [55]; it contains the initial molecular densities β_{0k} of the two bodies and the parameters ε and r_0 of the Lennard-Jones potential. The scalar $J_\ell \geq 0$ denotes the volume change of the surrounding material during deformation. It corresponds to the determinant of the deformation gradient of the body \mathcal{B}_ℓ [106]. If this body is rigid, incompressible, or considerably stiffer than body k , one can assume that J_ℓ is either equal or close to one. The volume change can be related to the local surface stretch $J_{c\ell}$ by using $J_\ell = J_{c\ell} \cdot \lambda_\ell$, where λ_ℓ is the stretch along the thickness (perpendicular to

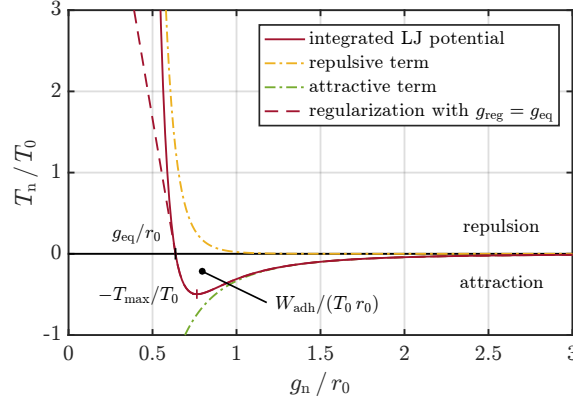


Figure 5 Contact traction in the model of Sauer and Wriggers [106] (“surface force formulation”) for frictionless adhesion and repulsion; $T_0 = A_H / (2\pi r_0^3)$.

the surface). Since the potential $\phi(r)$ rapidly decays to zero at large separations, it is reasonable to assume that within its effective range $\lambda_\ell \approx 1$, see also Sect. 2.3.2 of Ref. [101].

Eq. (7) contains a scalar, θ_k , that includes the current alignment of the two interacting surfaces as well as the volume change of body \mathcal{B}_k . Like with J_ℓ , θ_k requires the computation of the deformation in the vicinity of surface point \mathbf{x}_k . If both surfaces are parallel, and if the influence of the surface stretch of body \mathcal{B}_k is negligible, one can set $\theta_k \approx 1$, as is shown in Ref. [106]. In the following, we also assume that $\theta_k \approx 1$. An alternative approximation (similar to $J_\ell \approx J_{cl}$) is proposed by Mergel in [75].

Before we proceed with the frictional part, let us define some characteristic parameters shown in Fig. 5:

1. The equilibrium distance $g_{eq} = r_0 / \sqrt[6]{15}$ at which $T_n(g_{eq}) = 0$ [99];
2. The work of adhesion per unit area for full separation, which is obtained by integrating $|T_n(g_n)|$ from $g_n = g_{eq}$ to $g_n = \infty$ [99],

$$W_{adh} = \frac{\sqrt[3]{15} A_H}{16\pi r_0^2}; \quad (8)$$

3. The location g_{max} of the maximum adhesive traction T_{max} ,

$$g_{max} = \frac{r_0}{\sqrt[6]{5}}, \quad T_{max} = |T_n(g_{max})| = \frac{\sqrt{5} A_H}{9\pi r_0^3}. \quad (9)$$

Since $T_n(g_{max})$ is negative (i.e., attractive), g_{max} is the global minimum of T_n .

Furthermore, in a computational implementation, one may increase robustness by regularizing the normal traction for small normal gaps; see App. A and Fig. 5. This approach prevents ill-conditioning caused by the slope of T_n approaching minus infinity for decreasing g_n .

4.2 Frictional contact

We now propose two new phenomenological models that combine adhesion and repulsion with sliding friction. To this end, we assume here that the sliding resistance is equal to the threshold

for static friction. This means that the tangential traction required to initiate the sliding process agrees with the traction in the final sliding state. This assumption is physically justified by experimental observations for both biological adhesives and rough elastomers, indicating that for such systems static friction is comparable to kinetic friction [8, 7, 138, 48, 90]. For the validity and restrictions of this assumption see also Sect. 4.3.

To shorten the notation, we now omit index k . Let $\mathbf{t}_t(g_n, \mathbf{g}_t)$ denote the tangential traction vector due to frictional sticking or sliding, which is a force per *current* area. \mathbf{t}_t depends on both the normal gap from Eq. (6) and the tangential slip \mathbf{g}_t . We now assume that \mathbf{t}_t satisfies

$$\|\mathbf{t}_t(g_n, \mathbf{g}_t)\| \begin{cases} < t_{\text{slide}}(g_n) & \text{during sticking,} \\ = t_{\text{slide}}(g_n) & \text{during sliding,} \end{cases} \quad (10)$$

where $t_{\text{slide}}(g_n) \geq 0$ is a function that defines the sliding threshold. For t_{slide} we propose two different approaches in the next two subsections. Note that the classical Coulomb-Amontons law in Eq. (5) corresponds to $t_{\text{slide}} := \mu t_n$ for $t_n > 0$.

4.2.1 Model DI: Distance-independent sliding friction in the contact area

The first proposed friction law is motivated by the experimental results discussed in Sect. 3. We simply assume that the sliding threshold is independent of the distance g_n , i.e., constant within the current contact area. As a consequence, the resulting friction force is proportional to this area if the entire body is sliding. Let us first define some cutoff distance, g_{cut} , up to which the surfaces are sufficiently close to each other in order to experience friction. After introducing a constant parameter $\tau_{\text{DI}} > 0$ for the frictional shear strength, we define

$$t_{\text{slide}}(g_n) = \begin{cases} \tau_{\text{DI}}, & g_n \leq g_{\text{cut}}, \\ 0, & g_n > g_{\text{cut}}. \end{cases} \quad (11)$$

Since this function is discontinuous at $g_n = g_{\text{cut}}$, we regularize it with the logistic function,

$$t_{\text{slide}}(g_n) = \frac{\tau_{\text{DI}}}{1 + e^{k_{\text{DI}}(g_n - g_{\text{cut}})}}, \quad (12)$$

where $k_{\text{DI}} > 0$ (with unit 1/m) is a sufficiently large parameter. Both the original and the regularized models are illustrated in Fig. 6(a). Fig. 6(b) depicts the resulting friction law, i.e., the tangential traction-separation relation for arbitrary but fixed normal distances.

Note that for the regularized model $t_{\text{slide}}(g_{\text{cut}}) = \tau_{\text{DI}}/2$. As seen in Fig. 6, for model DI both the value τ_{DI} and the cutoff distance g_{cut} can be chosen independently of the normal traction. Nevertheless, for the sake of comparison with the other model we introduce a coefficient that relates the constant τ_{DI} to the maximum adhesive traction T_{max} , defined in Eq. (9), as

$$\mu_{\text{DI}} := \frac{\tau_{\text{DI}}}{T_{\text{max}}}. \quad (13)$$

The sliding threshold τ_{DI} is related to the *actual* contact surface (in the *current* configuration). This is motivated by the experiments from Sect. 3, for which the force is proportional to the current size of the contact area. If we defined the parameter τ_{DI} in the *reference* configuration instead, we would miss the change in contact area. The differences between those two approaches are discussed in Ref. [75].

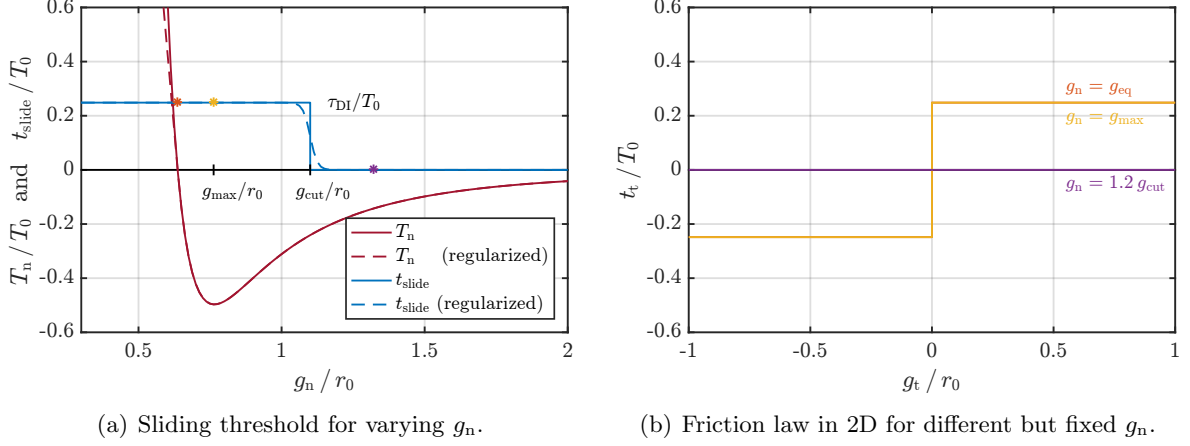


Figure 6 Model DI: Constant sliding traction within the contact area defined by the cutoff distance g_{cut} ; $\tau_{\text{DI}} = 0.5 T_{\text{max}}$, $g_{\text{cut}} = 1.1 r_0$, and $T_0 = A_H / (2\pi r_0^3)$; the colored asterisks mark the normal gap values g_{eq} (where $T_n = 0$, light red), g_{max} (yellow), and $1.2 g_{\text{cut}}$ (purple).

When recapitulating the unregularized version of model DI, one may recognize that Eq. (11) has some similarities to one of the earliest cohesive zone models, the Dugdale model [39]. In contrast to that model, however, we here define the sliding threshold for dynamic friction (instead of the normal stress during pure debonding). As mentioned also in Sect. 2.2, a similar approach is used in [34] to model sliding of graphene sheets. Therein, a constant stress during sliding is considered for those parts of the surfaces that are in compressive contact. This would correspond to the unregularized friction law (11) with $g_{\text{cut}} = g_{\text{eq}}$. The current model is more general, because it can also be used to describe sliding resistance for tensile contact.

4.2.2 Model EA: Extended Amontons' law in local form

The second proposed traction-separation law is inspired by extended Amontons' law (3). Importantly, that law was originally formulated in terms of force resultants and average tractions. In our continuum formulation, however, the normal contact stress (7) can vary within the contact area between attraction and repulsion. To include a tangential resistance against sliding even for zero or negative normal pressure, we now propose a model that can be regarded as extended Amontons' law in *local* form.


Let us first shift the traction T_n in Eq. (7) by a value smaller than or equal to the maximum adhesive traction, T_{max} ; see also Eq. (9) and Fig. 5. To this end, we introduce a distance, g_{cut} , which lies somewhere between the equilibrium distance, g_{eq} , and the location g_{max} of T_{max} :

$$g_{\text{cut}} = s_{\text{cut}} g_{\text{max}} + (1 - s_{\text{cut}}) g_{\text{eq}}, \quad s_{\text{cut}} \in [0, 1]. \quad (14)$$


As can be seen in Figs. 7(a) and 7(e), in this range $T_n(g_{\text{cut}})$ is smaller than or equal to zero. We then consider a sliding threshold that is proportional to the shifted curve $T_n(g_n) + |T_n(g_{\text{cut}})|$:

$$T_{\text{slide}}(g_n) = \begin{cases} \frac{\mu_{\text{EA}}}{J_{\text{cl}}} [T_n(g_n) - T_n(g_{\text{cut}})], & g_n < g_{\text{cut}}, \\ 0, & g_n \geq g_{\text{cut}}. \end{cases} \quad (15)$$


Note that in this case, the sliding threshold, T_{slide} , directly depends on the normal traction, T_n , which is defined in the *reference* configuration (Sect. 4.1).

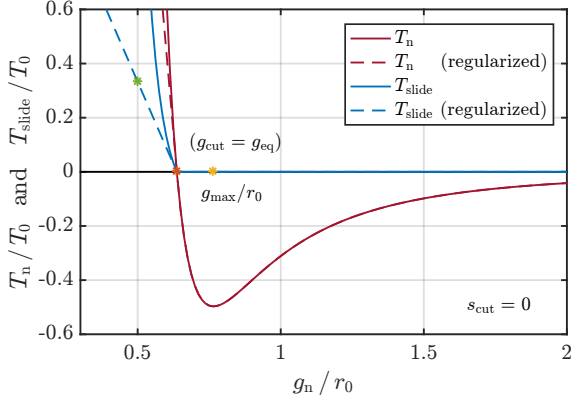


(a) Sliding threshold for varying g_n ; $s_{\text{cut}} = 0$.

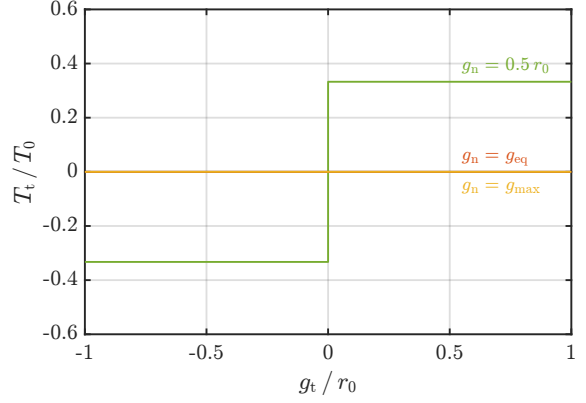


(b) Friction law for different but fixed g_n ; $s_{\text{cut}} = 0$.

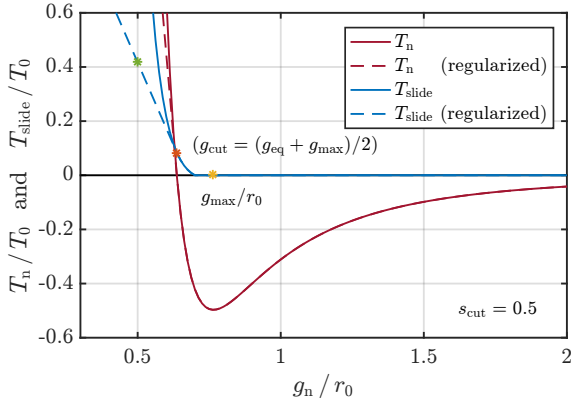


(c) Sliding threshold for varying g_n ; $s_{\text{cut}} = 0.5$.

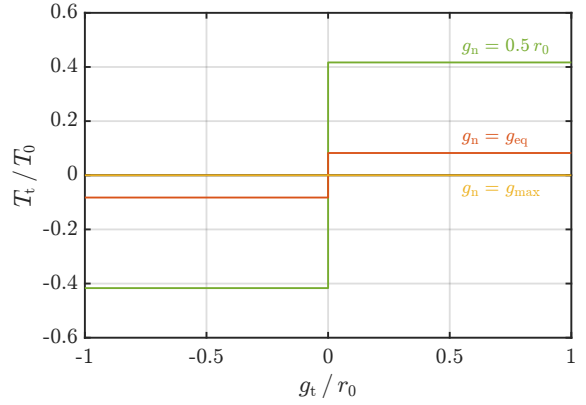

(d) Friction law for different but fixed g_n ; $s_{\text{cut}} = 0.5$.

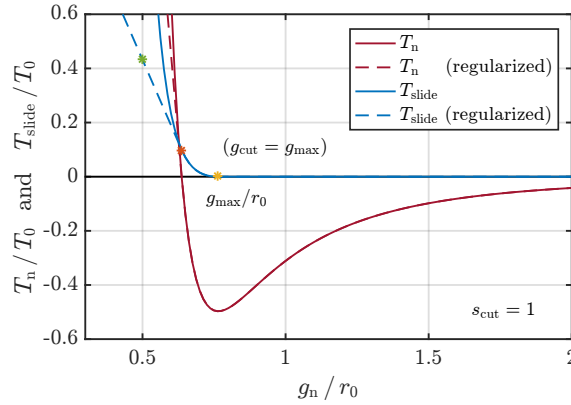

(e) Sliding threshold for varying g_n ; $s_{\text{cut}} = 1$.

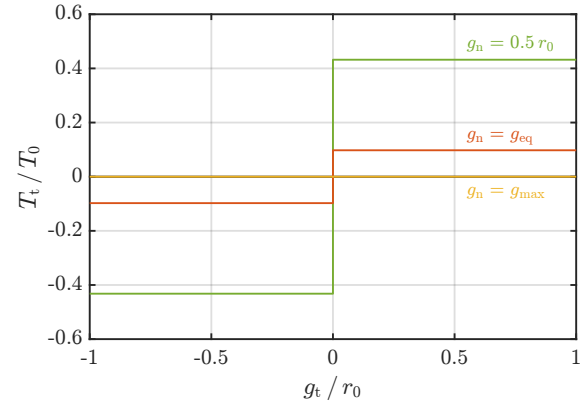

(f) Friction law for different but fixed g_n ; $s_{\text{cut}} = 1$.

Figure 7 Model EA: Extended Amontons' law in *local* form illustrated for $\mu_{\text{EA}} = 0.2$, $J_{\text{cl}} \equiv 1$, and three different values of s_{cut} ; $T_0 = A_{\text{H}} / (2\pi r_0^3)$; the colored asterisks mark the normal gap values $0.5 r_0$ (green), g_{eq} (where $T_n = 0$, light red), and g_{max} (yellow).

Fig. 7 illustrates model EA for three different values of the parameter s_{cut} . The left-hand side of the figure shows the dependence of the sliding traction, T_{slide} , on the normal gap, g_n ; dashed lines indicate a regularized version according to App. A. If $s_{\text{cut}} = 0$ (Figs. 7(a) and 7(b)), tangential sliding occurs only for positive — i.e. compressive — normal tractions. This corresponds to classical Coulomb-Amontons friction (see Eq. (5)) for non-adhesive contact. It is further used in many cohesive zone models (see Sect. 2.2) to include frictional sliding. If $s_{\text{cut}} > 0$, a tangential sliding resistance is present even for tensile normal tractions. Note that the curve for T_{slide} is smooth (C^1 -continuous) only for $s_{\text{cut}} = 1$ (Fig. 7(e)); otherwise, a kink occurs at $g_n = g_{\text{cut}}$, which requires special treatment in a computational implementation [75]. For the particular case $s_{\text{cut}} = 0$, this kink is exactly located at the equilibrium position, g_{eq} .

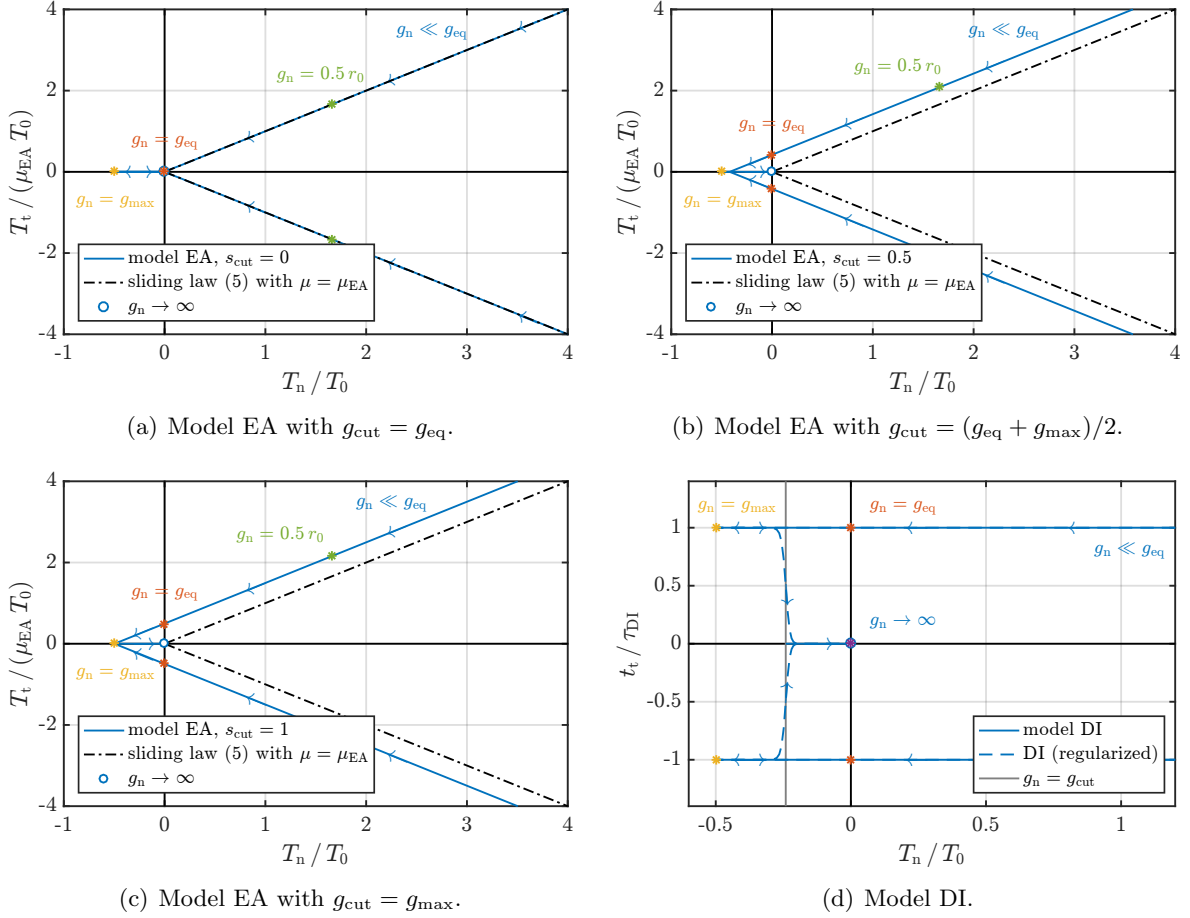


Figure 8 Tangential traction during sliding vs. normal traction for (a) – (c) model EA with $J_{\text{cl}} \equiv 1$ and (d) model DI; $T_0 = A_H / (2\pi r_0^3)$; the blue arrows indicate the sequence from $g_n = 0$ to $g_n \rightarrow \infty$; for the colored asterisks see Figs. 6 and 7, respectively.

Fig. 8 depicts the (directed) tangential traction during sliding versus the normal traction, either for model EA and different values of s_{cut} , or for model DI. As shown, for model EA this relation resembles a shifted version of the cone describing the classical friction law (5). In fact, up to $g_n \leq g_{\text{cut}}$, it corresponds to the Mohr-Coulomb model mentioned in Sect. 2.2. In model DI, the tangential traction, t_t , is not a function of the normal traction, t_n , anymore.

4.3 General comments, validity, and restrictions

Like any other model, our models have limitations. We address those in the following.

In Eq. (10) we assume that the static friction threshold coincides with the resistance for kinetic friction. As mentioned in the beginning of Sect. 4.2, this assumption agrees well with experimental observations for bio-adhesive systems. Nevertheless, these observations refer to the *globally* measured force resultant instead of the *local* traction at the contact zone. It remains to be discussed further whether static and kinetic friction coincide because of the bio-material itself, or whether this is caused by a split of the effective contact area into a large number of small areas. The influence of such a split on both static friction and stick-slip motion is addressed in Refs. [125, 126, 71]. Regarding bio-inspired adhesives, it may be arguable whether the assumption of equal static and kinetic friction is still valid. See, for instance, the experimental results [125] obtained for a microstructured polyvinyl siloxane (PVS) surface sliding on glass. If required, our model might be extended to account for differing parameters for static and kinetic friction.

In our model we consider dry (i.e., non-lubricated) adhesion and friction. We hence omit the influence of any secretion that may cover the adhesive device, as observed for many beetles and other insects. In fact, experimental studies on insect pads show that the depletion of such secretion (caused e.g. by sliding or by repeating detachment) affects both their frictional resistance [37, 22] and (although less strongly) their adhesion [66]. Nevertheless, if the amount of sliding is sufficiently small, one can assume that the frictional resistance does not change considerably. In order to include the influence of a finite amount of fluid, it would be possible to adjust the friction parameter with the distance of sliding.

As shown in Sects. 1 and 3, there exist several applications for which van der Waals forces may affect the macroscopic behavior even at larger scales (micrometers or millimeters). For increasing length scales, a direct computational implementation of adhesion models based on the Lennard-Jones potential, such as the CGCM model (Sect. 4.1) and friction model EA, can become very inefficient, because they require nanoscale finite element resolution. For this reason, it would be very promising to develop an effective adhesion model that is regularized by the compliance of the surrounding material. An approach in this direction has been developed in the context of adhesive joints under small deformations [111]. Another possibility, which is pursued in Ref. [75], is to calibrate the parameters in Sect. 4.1 (like A_H , T_{\max} , or W_{adh}) such that they match with experimental data. The curve (7) is then regularized by an automatic increase of the length parameter r_0 . As a consequence, the model does not require nanoscale resolution. When adjusting these parameters it is important to distinguish between the nominal (or apparent) contact area and the true contact area due to very small asperities, which interact at the contact surface; see also the discussion in Sect. 2.1. For the CGCM of Sect. 4.1 the normal contact stress is integrated over an apparent, nominally flat contact area. Thus, simply inserting the material constant A_H for the considered pair of materials would overestimate the real strength of adhesion by several orders of magnitude. This can be overcome by directly inserting effectively measured values as described before. Note that in general, the ratio between the true and the nominal contact areas may depend on the contact pressure, as discussed in Sect. 5.2.4 of Ref. [128] from a computational point of view.

5 Qualitative comparison between model and experiment

We now apply the proposed two models to study adhesive friction between a soft cylindrical cap and a rigid substrate, see Fig. 9(a).

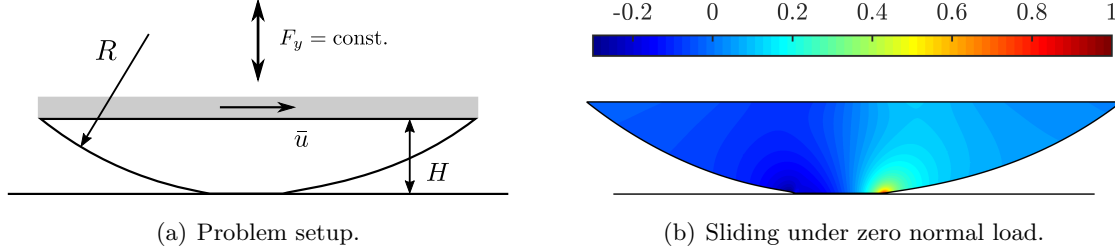


Figure 9 Adhesion of a soft cap: (a) Setup; (b) stress distribution during sliding for zero preload and model DI ($g_{\text{cut}} = g_{\text{max}}$, $\mu_{\text{DI}} = 1$); the colors show the first invariant of the Cauchy stress in units of E .


We consider this example as a preliminary study to investigate the qualitative behavior of our models, and show that it agrees with the experimental behavior presented in Sect. 3. For length scale reasons (addressed in Sect. 4.3), a quantitative comparison is not possible at this stage. Therefore, the cap in the example is 2D and smaller than that in Sect. 3. Also slightly different material parameters (Tab. 1) and smaller friction values are used. A 2D plane strain, nonlinear finite element formulation based on a Neo-Hooke material model is used to simulate the example. For further details see Ref. [75]. All results shown here are normalized by Young’s modulus, E , an arbitrary out-of-plane thickness (or width), W , and a unit length, L_0 (see Tab. 1).

E	ν	T_{max}	W_{adh}	R	H	L_0
2 MPa	0.4	0.33 MPa	0.027 J/m ²	47.1 L_0	10 L_0	1 μm


Table 1 Adhesion of a soft cap: Parameters.

As illustrated in Fig. 9(a), we slide the cap horizontally after prescribing a fixed normal force. As a special case we investigate the sliding behavior also under zero load, for which the attractive and repulsive stresses in the contact area equilibrate each other. The finite element mesh consists of 42,300 Q1N2.1 elements [29]. Fig. 9(b) shows the cap during sliding under zero load. Fig. 10 shows both the friction force and the contact area for different loads.


Here we use models DI with $g_{\text{cut}} = g_{\text{max}}$, EA with $s_{\text{cut}} = 1$, and EA with $s_{\text{cut}} = 0$ (Coulomb-Amontons friction, see also Eq. (5)). Before full sliding, the qualitative behavior of all models is close to our experimental results in Figs. 4(a) and 4(b). For classical Coulomb-Amontons friction, however, the sliding force is considerably lower than for the other models, because the compressed area is much smaller than the total contact area. When the entire contact surface is sliding, both the force and the area remain constant for the numerical models. In contrast, in the experiments, the tangential force drops over a finite time scale before entering a rather steady sliding regime. These differences are most likely caused by two phenomena, partly addressed in Sect. 4.3 already: The overshoot followed by a drop-off most probably results from the static friction threshold being larger than kinetic friction for the elastomeric contact. The gradual decrease over a finite time is likely caused by the viscosity in the bulk material. It thus makes sense to extend our model in future work to account for different static and kinetic friction parameters in the contact law (see Sect. 4.3), and to include a viscoelastic material model.

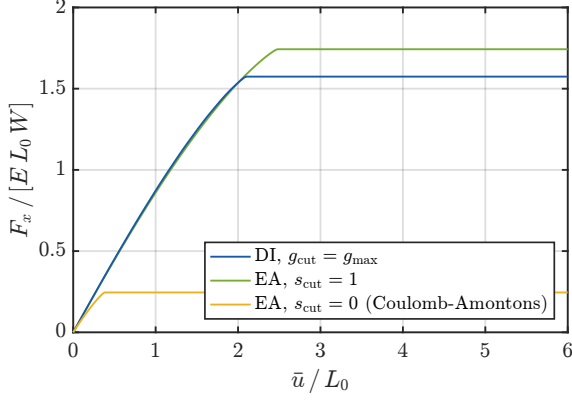


(a) Friction force under zero preload, $F_y^* = 0$.

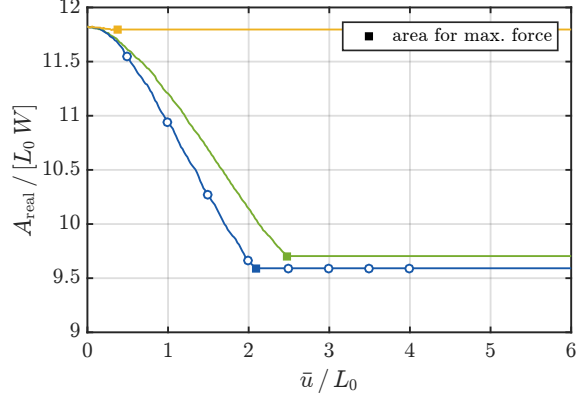

(b) Contact area under zero preload, $F_y^* = 0$.

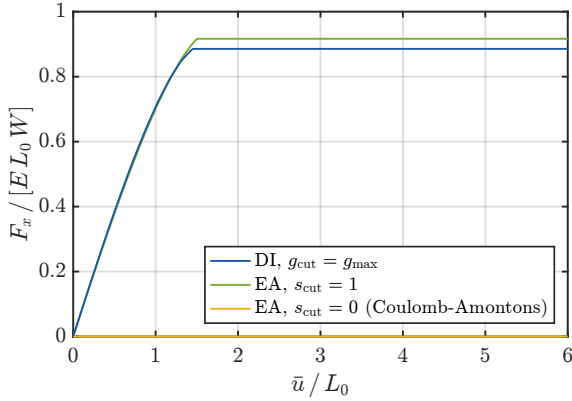

(c) Friction force under tensile preload, $F_y^* = 0.288$.

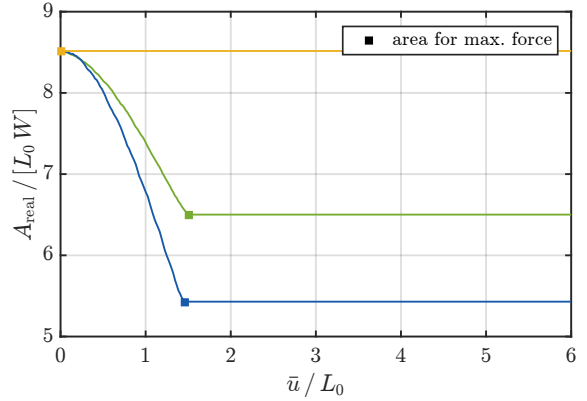

(d) Contact area under tensile preload, $F_y^* = 0.288$.

Figure 10 Adhesion of a soft cap: Friction force and contact area for sliding under a constant preload ($\mu_{EA} = \mu_{DI} = 1$); the squares indicate the onset of full sliding; the dots mark the configurations of Fig. 12; $F_y^* = F_y / [E L_0 W]$ denotes the normalized preload.

Fig. 11 (like Fig. 4(c)) shows the contact area versus the tangential force up to the point of full sliding. The classical law by Coulomb and Amontons (model EA for $s_{\text{cut}} = 0$) obviously fails to capture the qualitative behavior observed in the experiments. In contrast, the differences to the experimental results are smaller for model EA with $s_{\text{cut}} = 1$, but they are still considerable. Model DI on the other hand, agrees very well with the experiments.

Finally, Fig. 12 shows (a vertically stretched view of) the contact interface for model DI. As a comparison with Fig. 3 reveals, model DI appropriately captures also the qualitative behavior of the two peeling fronts at the right (slowest front) and left (fastest front) edges. In summary, combining model DI with a viscous material model and initial stiction (i.e., different parameters for static and kinetic friction) seems a very promising approach to model sliding of smooth rubber spheres on glass.

6 Conclusion

In this paper, we present two new continuum contact models for coupled adhesion and friction that are suitable for soft systems such as biological and bio-inspired adhesives. The two models are based on the 3D continuum adhesion formulation [106], which is suitable to describe large

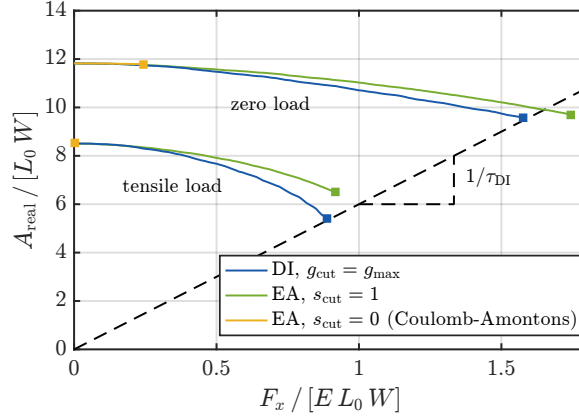


Figure 11 Adhesion of a soft cap: Contact area as a function of the tangential force for the onset of sliding under different preloads ($\mu_{\text{EA}} = \mu_{\text{DI}} = 1$); $\tau_{\text{DI}} = \mu_{\text{DI}} T_{\text{max}}$.

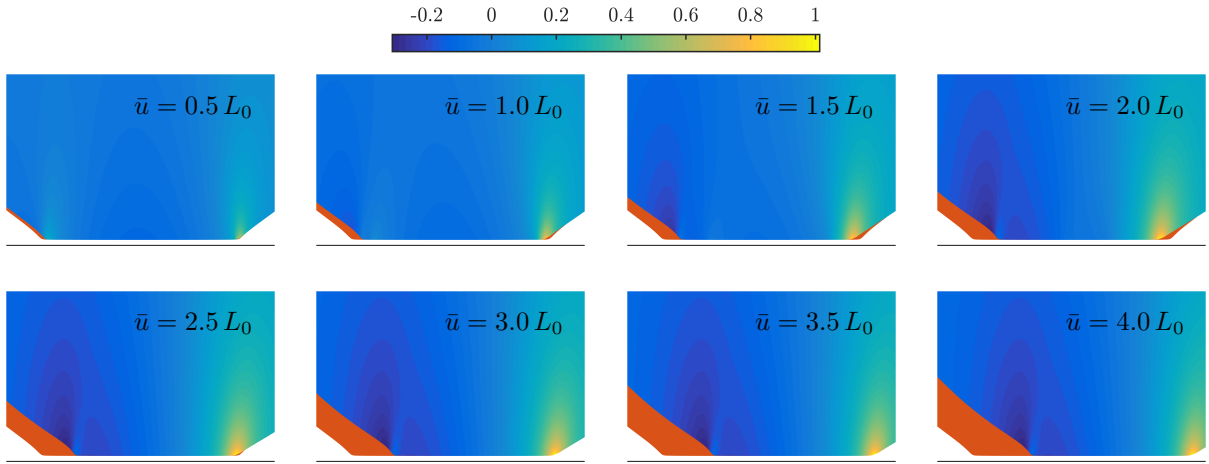


Figure 12 Adhesion of a soft cap: Evolution of the contact interface during sliding for model DI (see the dots in Fig. 10(b)); the vertical axis is stretched by the factor ≈ 3.93 ; the configuration at zero tangential displacement ($\bar{u} = 0$) is shown in red; the colors show the first invariant of the Cauchy stress in units of E .

deformations and large sliding motions. We motivate the proposed models in the context of existing theoretical and experimental findings. We also present new experimental results for a PDMS cap sliding on a smooth glass plate under low normal loads. Our findings indicate that the classical sliding law by Coulomb and Amontons (with linear dependence between normal and tangential loads) is not applicable for strong adhesion or small roughnesses. Instead, the friction force is also affected by an additional adhesion term. For some applications, this additional term dominates, and the sliding resistance can thus be described by a constant, material-dependent frictional shear strength multiplied with the real contact area. As a consequence, the proposed models can generate sliding friction even when the normal pressure is zero or negative (i.e., tensile). This is useful because soft bio-adhesive pads are observed to generate non-negligible sliding forces under zero normal load. The proposed models contain the law of Coulomb and Amontons as a special case. We investigate their behavior during adhesive sliding of a PDMS cap and glass, and show that the model behavior is in qualitative agreement to experiments. In addition, it is shown in [75] that model DI is suitable to describe also the characteristics of friction devices in stick insects. Also, for some applications models EA and DI show a very similar behavior as investigated in Refs. [75, 77].

This paper focuses on the motivation and derivation of our new contact models. Both their implementation in terms of a nonlinear finite element framework and the algorithmic treatment of adhesive friction are discussed separately [75, 77].

In future work, several extensions of the model should be developed in order to overcome the restrictions mentioned in Sect. 4.3. The most crucial one, is the restriction to small length scales that is inherent to van der Waals based contact formulations. A contact homogenization technique should be able to overcome this. Other important model extensions include the incorporation of differing static and kinetic friction, and the incorporation of viscosity in the bulk material. The current comparison between model and experiment is qualitative. With a refined model, it will be possible to conduct quantitative comparisons. For this purpose, further experiments are called for. In particular, it would be interesting to apply model EA to problems in which both adhesion- and pressure-controlled friction play a major role.

A Regularization for small normal distances

To avoid ill-conditioning, it is possible to regularize the contact stress for small normal gaps, $g_n \rightarrow 0$, e.g. by means of linear extrapolation. To this end, we introduce $T_n(g_n) \approx T_n^{\text{reg}}(g_n)$,

$$T_n^{\text{reg}}(g_n) = \begin{cases} T_n(g_n), & g_n \geq g_{\text{reg}}, \\ T_n(g_{\text{reg}}) + T'_n(g_{\text{reg}})(g_n - g_{\text{reg}}), & g_n < g_{\text{reg}}; \end{cases} \quad (16)$$

see also Fig. 5. T'_n denotes the derivative of T_n with respect to g_n . It is reasonable to choose a regularization distance of $g_{\text{reg}} \approx g_{\text{eq}}$, where g_{eq} is the equilibrium distance. For $g_{\text{reg}} \leq g_{\text{eq}}$, the attractive part of the curve in Fig. 5 remains unaffected; if $g_{\text{reg}} > g_{\text{eq}}$, one also modifies the work of adhesion, W_{adh} , in Eq. (8), and shifts g_{eq} to another position.

Acknowledgements

The authors are grateful to the German Research Foundation (DFG) for supporting this research under grants SA1822/5-1 and GSC111. They also thank Dr. David Labonte (University of Cambridge) for helpful comments, and Udit Pillai (RWTH Aachen University) for his help with the FE mesh of the cylindrical cap. This work was further supported by LABEX MANUTECH-SISE (ANR-10-LABX-0075) of Université de Lyon, within the program Investissements d’Avenir (ANR-11-IDEX-0007) operated by the French National Research Agency (ANR). In addition, it received funding from the People Program (Marie Curie Actions) of the European Union’s Seventh Framework Program (FP7/2007–2013) under Research Executive Agency Grant Agreement PCIG-GA-2011-303871.

References

- [1] G. Alfano and E. Sacco. Combining interface damage and friction in a cohesive-zone model. *Int. J. Numer. Methods Eng.*, **68**(5):542–582, 2006.
- [2] N. Amouroux, J. Petit, and L. Léger. Role of interfacial resistance to shear stress on adhesive peel strength. *Langmuir*, **17**:6510–6517, 2001.
- [3] D. S. Amundsen, J. Scheibert, K. Thøgersen, J. Trømborg, and A. Malthe-Sørenssen. 1D model of precursors to frictional stick-slip motion allowing for robust comparison with experiments. *Tribol. Lett.*, **45**:357–369, 2012.

- [4] D. S. Amundsen, J. K. Trømborg, K. Thøgersen, E. Katzav, A. Malthé-Sørenssen, and J. Scheibert. Steady-state propagation speed of rupture fronts along one-dimensional frictional interfaces. *Phys. Rev. E*, **92**:032406, 2015.
- [5] J. F. Archard. Elastic deformation and the laws of friction. *Proc. R. Soc. London A*, **243**:190–205, 1957.
- [6] K. Autumn. Properties, principles, and parameters of the gecko adhesive system. In A. M. Smith and J. A. Callow, editors, *Biological Adhesives*, pages 225–256. Springer, Berlin Heidelberg, 2006.
- [7] K. Autumn, A. Dittmore, D. Santos, M. Spenko, and M. Cutkosky. Frictional adhesion: A new angle on gecko attachment. *J. Exp. Biol.*, **209**:3569–3579, 2006.
- [8] K. Autumn, Y. A. Liang, S. T. Hsieh, W. Zesch, W. P. Chan, T. W. Kenny, R. Fearing, and R. J. Full. Adhesive force of a single gecko foot-hair. *Nature*, **405**:681–685, 2000.
- [9] K. Autumn, M. Sitti, Y. A. Liang, A. M. Peattie, W. R. Hansen, S. Sponberg, T. W. Kenny, R. Fearing, J. N. Israelachvili, and R. J. Full. Evidence for van der Waals adhesion in gecko setae. *Proc. Natl. Acad. Sci. U.S.A.*, **99**(19):12252–12256, 2002.
- [10] J. R. Barber. Multiscale surfaces and Amontons’ law of friction. *Tribol. Lett.*, **49**:539–543, 2013.
- [11] M. D. Bartlett, A. B. Croll, D. R. King, B. M. Paret, D. J. Irschick, and A. J. Crosby. Looking beyond fibrillar features to scale gecko-like adhesion. *Adv. Mater.*, **24**:1078–1083, 2012.
- [12] T. Baumberger and C. Caroli. Solid friction from stick-slip down to pinning and aging. *Adv. Phys.*, **55**(3–4):279–348, 2006.
- [13] A. Berman, C. Drummond, and J. Israelachvili. Amontons’ law at the molecular level. *Tribol. Lett.*, **4**:95–101, 1998.
- [14] A. Berman, S. Steinberg, S. Campbell, A. Ulman, and J. Israelachvili. Controlled microtribology of a metal oxide surface. *Tribol. Lett.*, **4**:43–48, 1998.
- [15] B. Bhushan, editor. *Nanotribology and Nanomechanics*. Springer, Berlin Heidelberg, 2005.
- [16] B. Bhushan. *Introduction to Tribology*. Wiley, New York, 2nd edition, 2013.
- [17] J. Bonet and R. D. Wood. *Nonlinear Continuum Mechanics for Finite Element Analysis*. Cambridge University Press, 1997.
- [18] F. P. Bowden and D. Tabor. The area of contact between stationary and between moving surfaces. *Proc. R. Soc. London A*, **169**:391–413, 1939.
- [19] O. M. Braun and M. Peyrard. Modeling friction on a mesoscale: Master equation for the earthquakelike model. *Phys. Rev. Lett.*, **100**:125501, 2008.
- [20] B. J. Briscoe and S. L. Kremnitzer. A study of the friction and adhesion of polyethylene-terephthalate monofilaments. *J. Phys. D: Appl. Phys.*, **12**:505–517, 1979.
- [21] B. J. Briscoe and D. Tabor. Friction and wear of polymers: the role of mechanical properties. *Br. Polym. J.*, **10**:74–78, 1978.
- [22] J. M. R. Bullock, P. Drechsler, and W. Federle. Comparison of smooth and hairy attachment pads in insects: friction, adhesion and mechanisms for direction-dependence. *J. Exp. Biol.*, **211**:3333–3343, 2008.
- [23] J. L. Chaboche, R. Girard, and A. Schaff. Numerical analysis of composite systems by using inter-phase/interface models. *Comput. Mech.*, **20**:3–11, 1997.
- [24] W. R. Chang, I. Etsion, and D. B. Bogy. Adhesion model for metallic rough surfaces. *J. Tribol.*, **110**:50–55, 1988.
- [25] M. Ciavarella. The generalized Cattaneo partial slip plane contact problem. II — Examples. *Int. J. Solids Struct.*, **35**(18):2363–2378, 1998.
- [26] M. Cocou, M. Schryve, and M. Raous. A dynamic unilateral contact problem with adhesion and friction in viscoelasticity. *Z. angew. Math. Phys. (ZAMP)*, **61**:721–743, 2010.
- [27] C. Cohen, F. Restagno, C. Poulard, and L. Léger. Incidence of the molecular organization on friction at soft polymer interfaces. *Soft Matter*, **7**:8535–8541, 2011.
- [28] R. R. Collino, N. R. Philips, M. N. Rossol, R. M. McMeeking, and M. R. Begley. Detachment of compliant films adhered to stiff substrates via van der Waals interactions: role of frictional sliding during peeling. *J. R. Soc. Interface*, **11**:20140453, 2014.
- [29] C. J. Corbett and R. A. Sauer. NURBS-enriched contact finite elements. *Comput. Methods Appl. Mech. Eng.*, **275**:55–75, 2014.
- [30] M.-J. Dalbe, R. Villey, M. Ciccotti, S. Santucci, P.-P. Cortet, and L. Vanel. Inertial and stick-slip regimes of unstable adhesive tape peeling. *Soft Matter*, **12**:4537–4548, 2016.

- [31] F. V. de Blasio. *Introduction to the Physics of Landslides*. Lecture Notes on the Dynamics of Mass Wasting. Springer, 2011.
- [32] E. Degrandi-Contraires, C. Poulard, F. Restagno, and L. Léger. Sliding friction at soft micropatterned elastomer interfaces. *Faraday Discuss.*, **156**:255–265, 2012.
- [33] G. Del Piero and M. Raous. A unified model for adhesive interfaces with damage, viscosity, and friction. *Eur. J. Mech. A/Solids*, **29**:496–507, 2010.
- [34] Z. Deng, A. Smolyanitsky, Q. Li, X.-Q. Feng, and R. J. Cannara. Adhesion-dependent negative friction coefficient on chemically modified graphite at the nanoscale. *Nat. Mater.*, **11**:1032–1037, 2012.
- [35] B. Derjaguin. Molekulartheorie der äußeren Reibung. *Z. Phys.*, **88**:661–675, 1934.
- [36] B. V. Derjaguin, V. M. Muller, and Y. P. Toporov. Effect of contact deformations on the adhesion of particles. *J. Colloid Interface Sci.*, **53**(2):314–325, 1975.
- [37] P. Drechsler and W. Federle. Biomechanics of smooth adhesive pads in insects: influence of tarsal secretion on attachment performance. *J. Comp. Physiol. A*, **192**:1213–1222, 2006.
- [38] Y. Du, L. Chen, N. E. McGruer, G. G. Adams, and I. Etsion. A finite element model of loading and unloading of an asperity contact with adhesion and plasticity. *J. Colloid Interface Sci.*, **312**:522–528, 2007.
- [39] D. S. Dugdale. Yielding of steel sheets containing slits. *J. Mech. Phys. Solids*, **8**:100–104, 1960.
- [40] E. V. Eason, E. W. Hawkes, M. Windheim, D. L. Christensen, T. Libby, and M. R. Cutkosky. Stress distribution and contact area measurements of a gecko toe using a high-resolution tactile sensor. *Bioinspir. Biomim.*, **10**:016013, 2015.
- [41] M. Enachescu, R. J. A. van den Oetelaar, R. W. Carpick, D. F. Ogletree, C. F. J. Flipse, and M. Salmeron. Observation of proportionality between friction and contact area at the nanometer scale. *Tribol. Lett.*, **7**:73–78, 1999.
- [42] H. Fan and S. Li. A three-dimensional surface stress tensor formulation for simulation of adhesive contact in finite deformation. *Int. J. Numer. Methods Eng.*, **107**(3):252–270, 2015.
- [43] K. N. G. Fuller and D. Tabor. The effect of surface roughness on the adhesion of elastic solids. *Proc. R. Soc. London A*, **345**:327–342, 1975.
- [44] J. Gao, W. D. Luedtke, D. Gourdon, M. Ruths, J. N. Israelachvili, and U. Landman. Frictional forces and Amontons’ law: From the molecular to the macroscopic scale. *J. Phys. Chem. B*, **108**:3410–3425, 2004.
- [45] L. Ge, S. Sethi, L. Ci, P. M. Ajayan, and A. Dhinojwala. Carbon nanotube-based synthetic gecko tapes. *Proc. Natl. Acad. Sci. U.S.A.*, **104**(26):10792–10795, 2007.
- [46] A. K. Geim, S. V. Dubonos, I. V. Grigorieva, K. S. Novoselov, A. A. Zhukov, and S. Y. Shapoval. Micro-fabricated adhesive mimicking gecko foot-hair. *Nat. Mater.*, **2**:461–463, 2003.
- [47] S. Gorb, M. Varenberg, A. Peressadko, and J. Tuma. Biomimetic mushroom-shaped fibrillar adhesive microstructure. *J. R. Soc. Interface*, **4**:271–275, 2007.
- [48] N. Gravish, M. Wilkinson, S. Sponberg, A. Parness, N. Esparza, D. Soto, T. Yamaguchi, M. Broide, M. Cutkosky, C. Creton, and K. Autumn. Rate-dependent frictional adhesion in natural and synthetic gecko setae. *J. R. Soc. Interface*, **7**:259–269, 2010.
- [49] J. A. Greenwood and K. L. Johnson. The mechanics of adhesion of viscoelastic solids. *Phil. Mag. A*, **43**(3):697–711, 1981.
- [50] K. A. Grosch. The relation between the friction and visco-elastic properties of rubber. *Proc. R. Soc. A*, **274**:21–39, 1963.
- [51] I. Guimatsia and G. D. Nguyen. A thermodynamics-based cohesive model for interface debonding and friction. *Int. J. Solids Struct.*, **51**:647–659, 2014.
- [52] G. C. Hill, D. R. Soto, A. M. Peattie, R. J. Full, and T. W. Kenny. Orientation angle and the adhesion of single gecko setae. *J. R. Soc. Interface*, **8**:926–933, 2011.
- [53] A. M. Homola, J. N. Israelachvili, P. M. McGuigan, and M. L. Gee. Fundamental experimental studies in tribology: The transition from “interfacial” friction of undamaged molecularly smooth surfaces to “normal” friction with wear. *Wear*, **136**:65–83, 1990.
- [54] G. Huber, H. Mantz, R. Spolenak, K. Mecke, K. Jacobs, S. N. Gorb, and E. Arzt. Evidence for capillarity contributions to gecko adhesion from single spatula nanomechanical measurements. *Proc. Natl. Acad. Sci. U.S.A.*, **102**(45):16293–16296, 2005.
- [55] J. N. Israelachvili. *Intermolecular and Surface Forces*. Academic Press, 3rd edition, 2011.
- [56] H. Izadi, K. M. E. Stewart, and A. Penlidis. Role of contact electrification and electrostatic interactions in gecko adhesion. *J. R. Soc. Interface*, **11**:20140371, 2014.

- [57] A. Jagota and C.-Y. Hui. Adhesion, friction, and compliance of bio-mimetic and bio-inspired structured interfaces. *Mater. Sci. Eng. R*, **72**:253–292, 2011.
- [58] U. B. Jayadeep, M. S. Bobji, and C. S. Jog. Energy loss due to adhesion in longitudinal impact of elastic cylinders. *Eur. J. Mech. A/Solids*, **45**:20–31, 2014.
- [59] U. B. Jayadeep, M. S. Bobji, and C. S. Jog. A body-force formulation for analyzing adhesive interactions with special considerations for handling symmetry. *Finite Elem. Anal. Des.*, **117–118**:1–10, 2016.
- [60] J.-W. Jiang and H. S. Park. A Gaussian treatment for the friction issue of Lennard-Jones potential in layered materials: Application to friction between graphene, MoS₂, and black phosphorus. *J. Appl. Phys.*, **117**:124304, 2015.
- [61] K. L. Johnson. Continuum mechanics modeling of adhesion and friction. *Langmuir*, **12**:4510–4513, 1996.
- [62] K. L. Johnson. Adhesion and friction between a smooth elastic spherical asperity and a plane surface. *Proc. R. Soc. London A*, **453**:163–179, 1997.
- [63] K. L. Johnson, K. Kendall, and A. D. Roberts. Surface energy and the contact of elastic solids. *Proc. R. Soc. London A*, **324**:301–313, 1971.
- [64] H. Kawamura, T. Hatano, N. Kato, S. Biswas, and B. K. Chakrabarti. Statistical physics of fracture, friction, and earthquakes. *Rev. Mod. Phys.*, **84**:839–884, 2012.
- [65] K. Kendall. Thin-film peeling – the elastic term. *J. Phys. D: Appl. Phys.*, **8**:1449–1452, 1975.
- [66] D. Labonte and W. Federle. Rate-dependence of ‘wet’ biological adhesives and the function of the pad secretion in insects. *Soft Matter*, **11**:8661–8673, 2015.
- [67] D. Labonte and W. Federle. Biomechanics of shear-sensitive adhesion in climbing animals: peeling, pre-tension and sliding-induced changes in interface strength. *J. R. Soc. Interface*, **13**:20160373, 2016.
- [68] D. Labonte, J. A. Williams, and W. Federle. Surface contact and design of fibrillar ‘friction pads’ in stick insects (*Carausius morosus*): mechanisms for large friction coefficients and negligible adhesion. *J. R. Soc. Interface*, **11**:20140034, 2014.
- [69] T. A. Laursen. *Computational Contact and Impact Mechanics*. Springer, 2002.
- [70] C. J. Lissenden and C. T. Herakovich. Numerical modelling of damage development and viscoplasticity in metal matrix composites. *Comput. Methods Appl. Mech. Eng.*, **126**:289–303, 1995.
- [71] B. Lorenz and B. N. J. Persson. On the origin of why static or breakloose friction is larger than kinetic friction, and how to reduce it: the role of aging, elasticity and sequential interfacial slip. *J. Phys.: Condens. Matter*, **24**:225008, 2012.
- [72] A. Majumdar and B. Bhushan. Fractal model of elastic-plastic contact between rough surfaces. *J. Tribol.*, **113**:1–11, 1991.
- [73] D. Maugis. Adhesion of spheres: The JKR-DMT transition using a Dugdale model. *J. Colloid Interface Sci.*, **150**(1):243–269, 1992.
- [74] D. Maugis. On the contact and adhesion of rough surfaces. *J. Adhes. Sci. Technol.*, **10**(2):161–175, 1996.
- [75] J. C. Mergel. *Advanced Computational Models for the Analysis of Adhesive Friction*. Doctoral thesis, RWTH Aachen University, Germany, 2017. Submitted.
- [76] J. C. Mergel and R. A. Sauer. On the optimum shape of thin adhesive strips for various peeling directions. *J. Adhesion*, **90**(5-6):526–544, 2014.
- [77] J. C. Mergel, J. Scheibert, and R. A. Sauer. A computational contact formulation for coupled adhesion and friction. 2018. Under preparation.
- [78] Y. Mo, K. T. Turner, and I. Szlufarska. Friction laws at the nanoscale. *Nature*, **457**:1116–1119, 2009.
- [79] M. H. Müser, W. B. Dapp, R. Bugnicourt, P. Sainsot, N. Lesaffre, T. A. Lubrecht, B. N. J. Persson, K. Harris, A. Bennett, K. Schulze, S. Rohde, P. Ifju, W. G. Sawyer, T. Angelini, H. A. Esfahani, M. Kадkhodaei, S. Akbarzadeh, J.-J. Wu, G. Vorlaufer, A. Vernes, S. Solhjoo, A. I. Vakis, R. L. Jackson, Y. Xu, J. Streator, A. Rostami, D. Dini, S. Medina, G. Carbone, F. Bottiglione, L. Afferrante, J. Monti, L. Pastewka, M. O. Robbins, and J. A. Greenwood. Meeting the contact-mechanics challenge. *Tribol. Lett.*, **65**:118, 2017.
- [80] M. Nosonovsky and B. Bhushan. Multiscale friction mechanisms and hierarchical surfaces in nano- and bio-tribology. *Mater. Sci. Eng. R*, **58**:162–193, 2007.
- [81] A. Parness, D. Soto, N. Esparza, N. Gravish, M. Wilkinson, K. Autumn, and M. Cutkosky. A microfabricated wedge-shaped adhesive array displaying gecko-like dynamic adhesion, directionality and long lifetime. *J. R. Soc. Interface*, **6**:1223–1232, 2009.
- [82] L. Pastewka and M. O. Robbins. Contact between rough surfaces and a criterion for macroscopic adhesion. *Proc. Natl. Acad. Sci. U.S.A.*, **111**(9):3298–3303, 2014.

- [83] Z. L. Peng, S. H. Chen, and A. K. Soh. Peeling behavior of a bio-inspired nano-film on a substrate. *Int. J. Solids Struct.*, **47**:1952–1960, 2010.
- [84] B. N. J. Persson. *Sliding Friction*. Springer, Berlin Heidelberg New York, 2nd edition, 2000.
- [85] B. N. J. Persson. Theory of rubber friction and contact mechanics. *J. Chem. Phys.*, **115**(8):3840–3861, 2001.
- [86] B. N. J. Persson, O. Albohr, U. Tartaglino, A. I. Volokitin, and E. Tosatti. On the nature of surface roughness with application to contact mechanics, sealing, rubber friction and adhesion. *J. Phys.: Condens. Matter*, **17**:R1–R62, 2005.
- [87] B. N. J. Persson, I. M. Sivebæk, V. N. Samoilov, K. Zhao, A. I. Volokitin, and Z. Zhang. On the origin of Amonton’s friction law. *J. Phys.: Condens. Matter*, **20**:395006, 2008.
- [88] E. Popova and V. L. Popov. The research works of Coulomb and Amontons and generalized laws of friction. *Friction*, **3**(2):183–190, 2015.
- [89] L. Prandtl. Ein Gedankenmodell zur kinetischen Theorie der festen Körper. *Z. angew. Math. Mech. (ZAMM)*, **8**(2):85–106, 1928.
- [90] A. Prevost, J. Scheibert, and G. Debrégeas. Probing the micromechanics of a multi-contact interface at the onset of frictional sliding. *Eur. Phys. J. E*, **36**:17, 2013.
- [91] Y. I. Rabinovich, J. J. Adler, A. Ata, R. K. Singh, and B. M. Moudgil. Adhesion between nanoscale rough surfaces. I. Role of asperity geometry. *J. Colloid Interface Sci.*, **232**:10–16, 2000.
- [92] M. Raous, L. Cangémi, and M. Cocu. A consistent model coupling adhesion, friction, and unilateral contact. *Comput. Methods Appl. Mech. Eng.*, **177**:383–399, 1999.
- [93] M. Raous and Y. Monerie. Unilateral contact, friction and adhesion: 3D cracks in composite materials. In J. A. C. Martins and M. D. P. Monteiro Marques, editors, *Contact Mechanics*, pages 333–346. Kluwer, 2002.
- [94] M. Ruths, A. D. Berman, and J. N. Israelachvili. Surface forces and nanorheology of molecularly thin films. In B. Bhushan, editor, *Nanotribology and Nanomechanics*, pages 389–481. Springer, Berlin Heidelberg, 2005.
- [95] E. Sacco and F. Lebon. A damage-friction interface model derived from micromechanical approach. *Int. J. Solids Struct.*, **49**:3666–3680, 2012.
- [96] E. Sacco and J. Toti. Interface elements for the analysis of masonry structures. *Int. J. Comput. Methods Eng. Sci. Mech.*, **11**:354–373, 2010.
- [97] R. Sahli, G. Pallares, C. Ducottet, I. E. Ben Ali, S. Al Akhrass, M. Guibert, and J. Scheibert. Evolution of real contact area under shear and the value of static friction of soft materials. *Proc. Natl. Acad. Sci. U.S.A.*, **115**(3):471–476, 2018.
- [98] R. A. Sauer. *An Atomic Interaction based Continuum Model for Computational Multiscale Contact Mechanics*. PhD thesis, University of California, Berkeley, USA, 2006.
- [99] R. A. Sauer. The peeling behavior of thin films with finite bending stiffness and the implications on gecko adhesion. *J. Adhesion*, **87**(7–8):624–643, 2011.
- [100] R. A. Sauer. A survey of computational models for adhesion. *J. Adhesion*, **92**(2):81–120, 2016.
- [101] R. A. Sauer and L. De Lorenzis. A computational contact formulation based on surface potentials. *Comput. Methods Appl. Mech. Eng.*, **253**:369–395, 2013.
- [102] R. A. Sauer and L. De Lorenzis. An unbiased computational contact formulation for 3D friction. *Int. J. Numer. Methods Eng.*, **101**(4):251–280, 2015.
- [103] R. A. Sauer and M. Holl. A detailed 3D finite element analysis of the peeling behaviour of a gecko spatula. *Comput. Methods Biomech. Biomed. Eng.*, **16**(6):577–591, 2013.
- [104] R. A. Sauer and S. Li. A contact mechanics model for quasi-continua. *Int. J. Numer. Methods Eng.*, **71**:931–962, 2007.
- [105] R. A. Sauer and J. C. Mergel. A geometrically exact finite beam element formulation for thin film adhesion and debonding. *Finite Elem. Anal. Des.*, **86**:120–135, 2014.
- [106] R. A. Sauer and P. Wriggers. Formulation and analysis of a three-dimensional finite element implementation for adhesive contact at the nanoscale. *Comput. Methods Appl. Mech. Eng.*, **198**:3871–3883, 2009.
- [107] A. R. Savkoor and G. A. D. Briggs. The effect of tangential force on the contact of elastic solids in adhesion. *Proc. R. Soc. London A*, **356**:103–114, 1977.
- [108] A. Schallamach. The load dependence of rubber friction. *Proc. Phys. Soc. B*, **65**(9):657–661, 1952.
- [109] A. Schallamach. A theory of dynamic rubber friction. *Wear*, **6**:375–382, 1963.

- [110] J. Scheibert, A. Prevost, J. Frelat, P. Rey, and G. Debrégeas. Experimental evidence of non-Amontons behaviour at a multicontact interface. *Lett. J. Explor. Front. Phys. (EPL)*, **83**:34003, 2008.
- [111] P. Schmidt and U. Edlund. A finite element method for failure analysis of adhesively bonded structures. *Int. J. Adhesion Adhesives*, **30**:665–681, 2010.
- [112] M. Schryve. *Modèle d’adhésion cicatrisante et applications au contact verre/élastomère*. PhD thesis, Université de Provence Aix-Marseille I, France, November 2008.
- [113] I. M. Sivebæk, V. N. Samoilov, and B. N. J. Persson. Frictional properties of confined polymers. *Eur. Phys. J. E*, **27**:37–46, 2008.
- [114] L. Snozzi and J.-F. Molinari. A cohesive element model for mixed mode loading with frictional contact capability. *Int. J. Numer. Methods Eng.*, **93**:510–526, 2013.
- [115] D. Tabor. Friction — the present state of our understanding. *J. Lubr. Technol.*, **103**:169–179, 1981.
- [116] K. Thøgersen, J. K. Trømborg, H. A. Sveinsson, A. Malthé-Sørenssen, and J. Scheibert. History-dependent friction and slow slip from time-dependent microscopic junction laws studied in a statistical framework. *Phys. Rev. E*, **89**:052401, 2014.
- [117] C. Thornton. Interparticle sliding in the presence of adhesion. *J. Phys. D: Appl. Phys.*, **24**:1942–1946, 1991.
- [118] G. A. Tomlinson. CVI. A molecular theory of friction. *Phil. Mag. Ser. 7*, **7**(46):905–939, 1929.
- [119] J. Trømborg, J. Scheibert, D. S. Amundsen, K. Thøgersen, and A. Malthé-Sørenssen. Transition from static to kinetic friction: Insights from a 2D model. *Phys. Rev. Lett.*, **107**:074301, 2011.
- [120] J. K. Trømborg, H. A. Sveinsson, J. Scheibert, K. Thøgersen, D. S. Amundsen, and A. Malthé-Sørenssen. Slow slip and the transition from fast to slow fronts in the rupture of frictional interfaces. *Proc. Natl. Acad. Sci. U.S.A.*, **111**(24):8764–8769, 2014.
- [121] J. K. Trømborg, H. A. Sveinsson, K. Thøgersen, J. Scheibert, and A. Malthé-Sørenssen. Speed of fast and slow rupture fronts along frictional interfaces. *Phys. Rev. E*, **92**:012408, 2015.
- [122] V. Tvergaard. Effect of fibre debonding in a whisker-reinforced metal. *Mater. Sci. Eng.*, **125**:203–213, 1990.
- [123] W. W. Tworzydło, W. Cecot, J. T. Oden, and C. H. Yew. Computational micro- and macroscopic models of contact and friction: formulation, approach and applications. *Wear*, **220**:113–140, 1998.
- [124] A. I. Vakis, V. A. Yastrebov, J. Scheibert, C. Minfray, L. Nicola, D. Dini, A. Almqvist, M. Paggi, S. Lee, G. Limbert, J. F. Molinari, G. Anciaux, R. Aghababaei, S. Echeverri Restrepo, A. Papangelo, A. Cammarata, P. Nicolini, C. Putignano, G. Carbone, M. Ciavarella, S. Stupkiewicz, J. Lengiewicz, G. Costagliola, F. Bosia, R. Guarino, N. M. Pugno, and M. H. Müser. Modeling and simulation in tribology across scales: An overview, 2018. DOI: 10.1016/j.triboint.2018.02.005.
- [125] M. Varenberg and S. Gorb. Shearing of fibrillar adhesive microstructure: friction and shear-related changes in pull-off force. *J. R. Soc. Interface*, **4**:721–725, 2007.
- [126] M. Varenberg and S. N. Gorb. Hexagonal surface micropattern for dry and wet friction. *Adv. Mater.*, **21**:483–486, 2009.
- [127] J. F. Waters and P. R. Guduru. Mode-mixity-dependent adhesive contact of a sphere on a plane surface. *Proc. R. Soc. A*, **466**:1303–1325, 2010.
- [128] P. Wriggers. *Computational Contact Mechanics*. Springer, Berlin Heidelberg, 2nd edition, 2006.
- [129] P. Wriggers and J. Reinelt. Multi-scale approach for frictional contact of elastomers on rough rigid surfaces. *Comput. Methods Appl. Mech. Eng.*, **198**:1996–2008, 2009.
- [130] F. Wu-Bavouzet, J. Cayer-Barrioz, A. Le Bot, F. Brochard-Wyart, and A. Buguin. Effect of surface pattern on the adhesive friction of elastomers. *Phys. Rev. E*, **82**:031806, 2010.
- [131] H. Yao and H. Gao. Mechanics of robust and releasable adhesion in biology: Bottom-up designed hierarchical structures of gecko. *J. Mech. Phys. Solids*, **54**:1120–1146, 2006.
- [132] S. Yashima, V. Romero, E. Wandersman, C. Frétnigny, M. K. Chaudhury, A. Chateauminois, and A. M. Prevost. Normal contact and friction of rubber with model randomly rough surfaces. *Soft Matter*, **11**:871–881, 2015.
- [133] V. A. Yastrebov. Sliding without slipping under Coulomb friction: opening waves and inversion of frictional force. *Tribol. Lett.*, **62**:1, 2016.
- [134] H. Yoshizawa, Y.-L. Chen, and J. Israelachvili. Fundamental mechanisms of interfacial friction. 1. Relation between adhesion and friction. *J. Phys. Chem.*, **97**:4128–4140, 1993.

- [135] B. Yurdumakan, N. R. Raravikar, P. M. Ajayan, and A. Dhinojwala. Synthetic gecko foot-hairs from multiwalled carbon nanotubes. *Chem. Commun.*, **30**:3799–3801, 2005.
- [136] H. Zeng, N. Pesika, Y. Tian, B. Zhao, Y. Chen, M. Tirrell, K. L. Turner, and J. N. Israelachvili. Frictional adhesion of patterned surfaces and implications for gecko and biomimetic systems. *Langmuir*, **25**(13):7486–7495, 2009.
- [137] X. Zhang, X. Zhang, and S. Wen. Finite element modeling of the nano-scale adhesive contact and the geometry-based pull-off force. *Tribol. Lett.*, **41**:65–72, 2011.
- [138] B. Zhao, N. Pesika, K. Rosenberg, Y. Tian, H. Zeng, P. McGuiggan, K. Autumn, and J. Israelachvili. Adhesion and friction force coupling of gecko setal arrays: Implications for structured adhesive surfaces. *Langmuir*, **24**:1517–1524, 2008.