

UVM Notes

1. Overview

1. What is UVM

- UVM is a standardized methodology, a set of pre-defined libraries using syntax and semantics of SystemVerilog.


b. Why UVM

Increases reusability

- The components(driver, sequencer. etc) are modules that can be re-used across projects.
- Stimulus are separate from the actual testbench hierarchy and can be re-used or replaced by new stimulus.
- Factory mechanisms make modifications of components easy. Create each components using factory enables them to be overridden in different tests/environments without changing the code base.

c. UVM class hierarchy

- UVM provides a set of base classes that more complex classes can be built by inheritance.
- Two main branches. The verification components are underneath `uvm_component`, and data objects consumed and operated by components are underneath `uvm_transaction`.

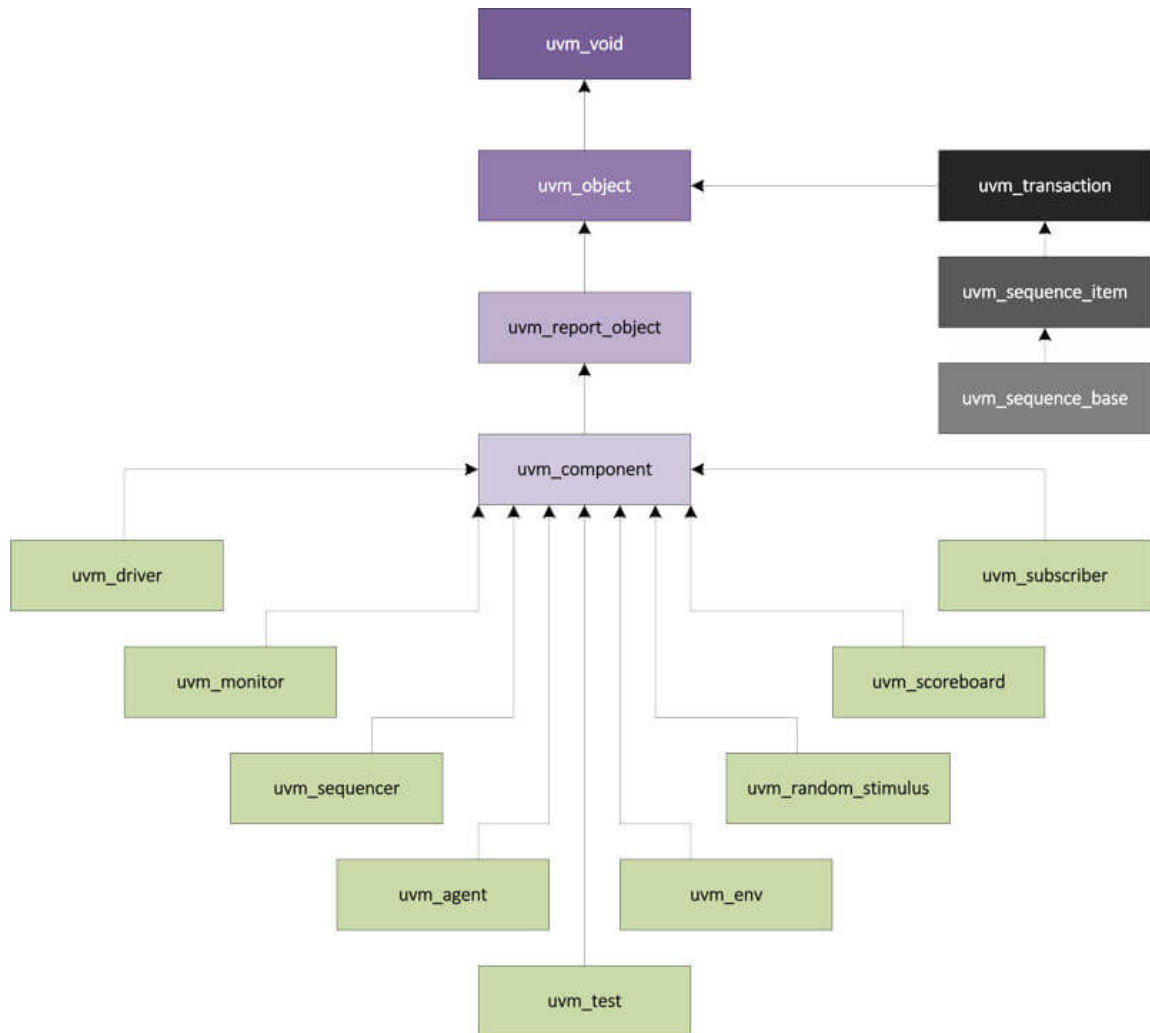

- Sequence is a container for the actual stimulus to the design. Stimulus classes are inherited from `uvm_sequence`.
- Data objects that are driven to DUT are sequence items and are inherited from `uvm_sequence_item`.
- UVM utilizes TLM(transaction level modeling) which helps to send data between components in the form of transactions and class objects. It also can broadcast a packet to its listeners without creating specific channels and attach to it.
- Phases enable every component to sync with each other before proceeding to the next phases. Every component goes through the build phase when it gets instantiated, connects with each other during

the connect phase, consumes simulation time during the run phase, and stops together in the final phase.

2. UVM Common Utilities

1. Base Classes

- **uvm_root**
 - It is an implicit top_level UVM component that is automatically created when simulation is run.
 - Users can access it via the global variable, **uvm_top**. Any components whose parent is set to null becomes a child of uvm_top.
 - uvm_top checks for errors during end_of_elaboration phase and issue uvm_fatal error to stop simulation.
- **uvm_report_object**
 - All messages, warnings, errors issued by components go via this interface.
 - A report has ID String, Severity, Verbosity Level, and Test Message parts. If the verbosity level is **GREATER** than the configured maximum verbosity level, it is **ignored**. For example, if maximum verbosity level is UVM_MEDIUM, and a info is assigned to verbosity level UVM_HIGH, then this message will not be seen in the output.

b. UVM utility & field macros

- UVM uses the concept of a factory where all objects are registered.
- Utility Macros
 - The utils macro is used to register an object or component with the factory.
 - Required to be used inside every user-defined class derived from **uvm_object**
 - Object Utility
 - All classes derived directly from **uvm_object** or **uvm_transaction** required to be registered using **`uvm_object_utils** macro.

- It is mandatory for the new function to be explicitly defined for every class, and take the name of the class instance as an argument.

`uvm_sequence` is inherited from `uvm_sequence_item`, `uvm_transaction`, then `uvm_object`.

```
class fc_sequence extends uvm_sequence #(fc_transaction);
    //register fc_sequence, this user-defined class with the factory
    `uvm_object_utils(fc_sequence)
    function new(string name = "fc_sequence");
        super.new(name);
    endfunction
endclass
```

- Component Utility
 - All classes derived directly or indirectly from `uvm_component` are required to be registered with the factory using ``uvm_component_utils` macro.
 - It is mandatory for the new function to be explicitly defined for every class, and takes the name of the class instance and a handle to the parent class where this object is instantiated.
- Macro Expansion
 - ``uvm_object_utils` gets expanded into its `*_begin` and `*_end` form with nothing in between.
 - `*_begin` implements other macros, such as
 - ``m_uvm_object_registry_internal(T,T)`, which implements the function `get_type()` and `get_object_type()` that returns a factory proxy object for the requested type
 - ``m_uvm_object_create_func(T)` which instantiates an object of the specified type by calling its no-args constructor
 - ``m_uvm_get_type_name_func(T)` which return the `type_name` as a string.

- ``uvm_field_utils_begin(T)` which registers the type with UVM factory
- Creation of class object
 - Recommend all class objects are created by calling the `type_idLLcreate()` method which is defined using the macro ``m_uvm_object_create_func(T)`. (this macro utilizes the `new()` function. When creating component object, two arguments are taken which are the name and parent).

```
fc_drv = fc_driver::type_id::create("fc_drv", this);
```

- Field Macros
 - ``uvm_field_*` macros that were used between `*_begin` and `*_end` provide automatic implementations of core methods like copy and compare.
 - ``uvm_field_*` corresponding to the data type of variables been used. Variables of type int, bit, byte should use ``uvm_field_int`, type string should use ``uvm_field_string` and so on.
 - The macro accepts at least two arguments, ARG and FLAG. ARG is the name of the variable, FLAG specifics which data method implementations will not be included(except `UVM_ALL_ON` and `UVM_DEFAULT`).
 - `UVM_ALL_ON`: all operations are turned on
 - `UVM_DEFAULT`: enables all operations, equivalent to `UVM_ALL_ON`
 - `UVM_NOCOPY`, `UVM_NOCOMPARE`, `UVM_NOPRINT`, `UVM_NOPACK`: do not copy, compare, print, pack/unpack the given variable
 - `UVM_REFERENE`: operate only on handles.
- UVM Object Print

- After using `type_id` create to create an object, we can randomize it and print it using `obj.randomize()` and `obj.print()`.
- `do_print()`
 - using automation macros introduces additional codes and reduces simulator performance.
 - We can use `do_*` callback. For example, we can use `do_print` inside the derived object. `do_print` is called by the print function by default.

```
virtual function void do_print(uvm_printer printer);
    super.do_print(printer);
    printer.print_string();
    //can control the radix of the given variable, such as UVM_HEX or UVM_DEC
    printer.print_field_int();
endfunction
```

- UVM Object Copy/Clone
 - we can use `obj2.copy(obj1)` method to copy the content of `obj1` into `obj2`
 - `do_copy()`
 - A generic `uvm_object` called "rhs" is received and type casted into `Packet pkt`. Then `m_addr` is copied from the type-casted `_pkt` to the variable of the current class.
- "rhs" does not contain `o_bool` as its only a parent handle. We cast this rhs into child data type and access it using child handle. We then copy content of casted handle into local variables.

```

class Packet extends uvm_object;
    rand bit[15:0] m_addr;
    ...
    virtual function void do_copy(uvm_object rhs);
        Packet _pkt;
        super.do_copy(rhs);
        $cast(_pkg, rhs);
        m_addr = _pkg.m_addr;
    endfunction
    ...
endclass

class Object extends uvm_object;
    rand Packet m_pkg;
    rand bool o_bool;
    ...
    virtual function void do_copy(uvm_object rhs);
        Object _obj;
        super.do_copy(rhs);
        $cast(_obj, rhs);
        o_bool = _obj.o_bool;
        m_pkg.copy(_obj.m_pkg);
    endfunction
endclass

```

- Clone
 - Clone will return an object with the copied contents, so no need of creating the second object before copy.
- UVM Object Compare
 - we can use something like obj2.compare(obj1).
 - do_compare

```

//inside Packet class
virtual function bit do_compare(uvm_object rhs, uvm_comparer comparer);
    bit res;
    Packet _pkt;
    $cast(_pkt, rhs);
    super.do_compare(_pkt, comparer);
    res = super.do_compare(_pkt, comparer) & m_addr == _pkt.m_addr;
    return res;
endfunction


virtual function bit do_compare(uvm_object rhs, uvm_comparer comparer);
    bit res;
    Object _obj;
    $cast(_obj, rhs);
    res = super.do_compare(_obj, comparer) & o_bool == _obj.o_bool
    & m_pkg.do_compare(_obj.m_pkt,comparer);
    return res;
endfunction

```

3. Testbench Structures

1. UVM Testbench Top

- All verification components, interfaces, and DUT are instantiated in a top level module called testbench.

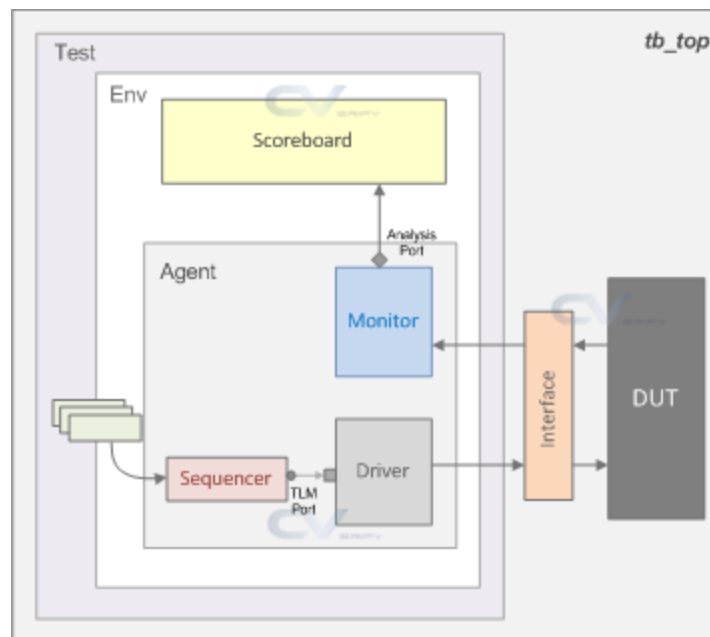

- At the start of simulation, set the interface handle as a config object in UVM database(`uvm_config_db::set`). This if can be retrieved in the test using the `get()` method.
- `run_test("test_name")` accepts test name as argument, and the `test_name` case will be run for simulation
- `tb_top` is a static container

2. UVM Test

- We can put the entire testbench into a container, `environment`, and use same environment for different test. Each testcase can manipulate `agents`, and run different `sequences` on many `sequencers` in the environment.
- As shown in the above top-level picture, we can start a virtual/normal `sequence` on a given `sequencer` in the `run_phase` of the test. Remember to raise and drop the objection
- A base test sets up all basic environment parameters and configurations that can be overridden by derivative tests. For the new test, we can define the phases we want to change, the the object will call its parent's phases that's not explicitly defined.

3. UVM Environment

- A UVM environment contains multiple reusable verification components and defined their default configuration as required.
- It is possible to instantiate agents and scoreboards directly in `uvm_test`, but tests become non-reusable because
 - They rely on a specific environment structure.
 - The test writer would need to know how to configure the environment
- `uvm_env` is the base class for hierarchical containers of other components that make up a complete environment
- We need to connect verification components together in the `connect_phase`

4. UVM Driver

- UVM driver drives transactions to a particular interface of the design. Transaction level objects are obtained from the **sequencer** and the UVM driver drives them to the design via an interface handle.
- UVM Driver-Sequencer handshake
 - The UVM driver uses following methods to interact with the sequencer.
 - **get_next_item**: blocks until a request item is available from the sequencer. Should be followed by **item_done** to complete the handshake.
 - **try_next_item**: non_blocking method which return **null** is a request object is not available from the sequencer. Else returns a pointer to the object
 - **item_done**: non_blocking method which completes the driver-sequencer handshake. Should be called after **get_next_item** or a successful **try_next_item** call.
 - A driver-sequencer handshake allow the driver to get a series of transaction objects from the sequence and respond back to the sequence after it finishes driving the given item, so it can get the next sequence
 - **get_next_item + item_done**
 - **fininsh_item** call in the sequence finishes only after the driver returns **item_done** call

```

virtual task run_phase (uvm_phase phase);
    my_data req_item;
    forever begin
        seq_item_port.get_next_item(req_item);
        @(posedge vif.clk);
        vif.en <= 1;
        seq_item_port.item_done();
    end
endtask

```

- **get + put**
 - The driver gets the next item and send back the sequence handshake in one go, before the UVM driver processes the item
 - The driver uses the **put** method to indicate that the item has been finished later.
 - So **finish_item** call in the sequence is finished as soon as **get()** is done
- A virtual interface handle **vif** is declared and assigned later in the build phase
- Real interface object is retrieved from the database directly into a local variable using **uvm_config_db::get()**

5. UVM Sequencer

- A sequencer generates data transactions as class objects and sends it to the Driver for execution
- The **uvm_sequencer** base class is parameterized by the **request** and **response** item types and can be handled by the sequencer. By default, response type is the same as the request type.

6. UVM Sequence

- UVM sequences are made up of several data items.

- Executed by assigned sequencer(s) which then send(s) data items to the driver. Sequences are **core stimuli** of any verification plan.
- We can make the **body** task virtual so child classes can override the task definition
- We can use **pre_body()** and **post_body()** callbacks
- We can use **`uvm_do()** sequence macros, which we have to provide a **uvm_sequence_item** object or a sequence and it does the following internally:
 - create the item using **`uvm_create** if necessary.
 - randomize the item or sequence.
 - call the **start_item()** and **finish_item()** if its a **uvm_sequence_item** object.
 - call the **start()** task if its a sequence.

7. UVM Monitor

- A UVM monitor is responsible for capturing signal activity from the design interface and translate it into transaction level data objects that can be sent to other components. It should have a virtual interface handle to the actual interface that this monitor is trying to monitor, and TLM analysis port declarations to broadcast captured data to others
- Its functionality should be limited to basic monitoring that is always required. High level functional checking should be done in a scoreboard.

8. UVM Agent

- An agent encapsulates a sequencer, driver, and monitor into a single entity. We can have **active** or **passive** agent, which only instantiate the monitor and is used for checking and coverage only. We can use **uvm_config_db::set** to configure a passive or active agent
- We can use **get_is_active()** to check whether to create sequencer or driver.

9. UVM Scoreboard

10. UVM Subscriber

11. UVM Virtual Sequencer