


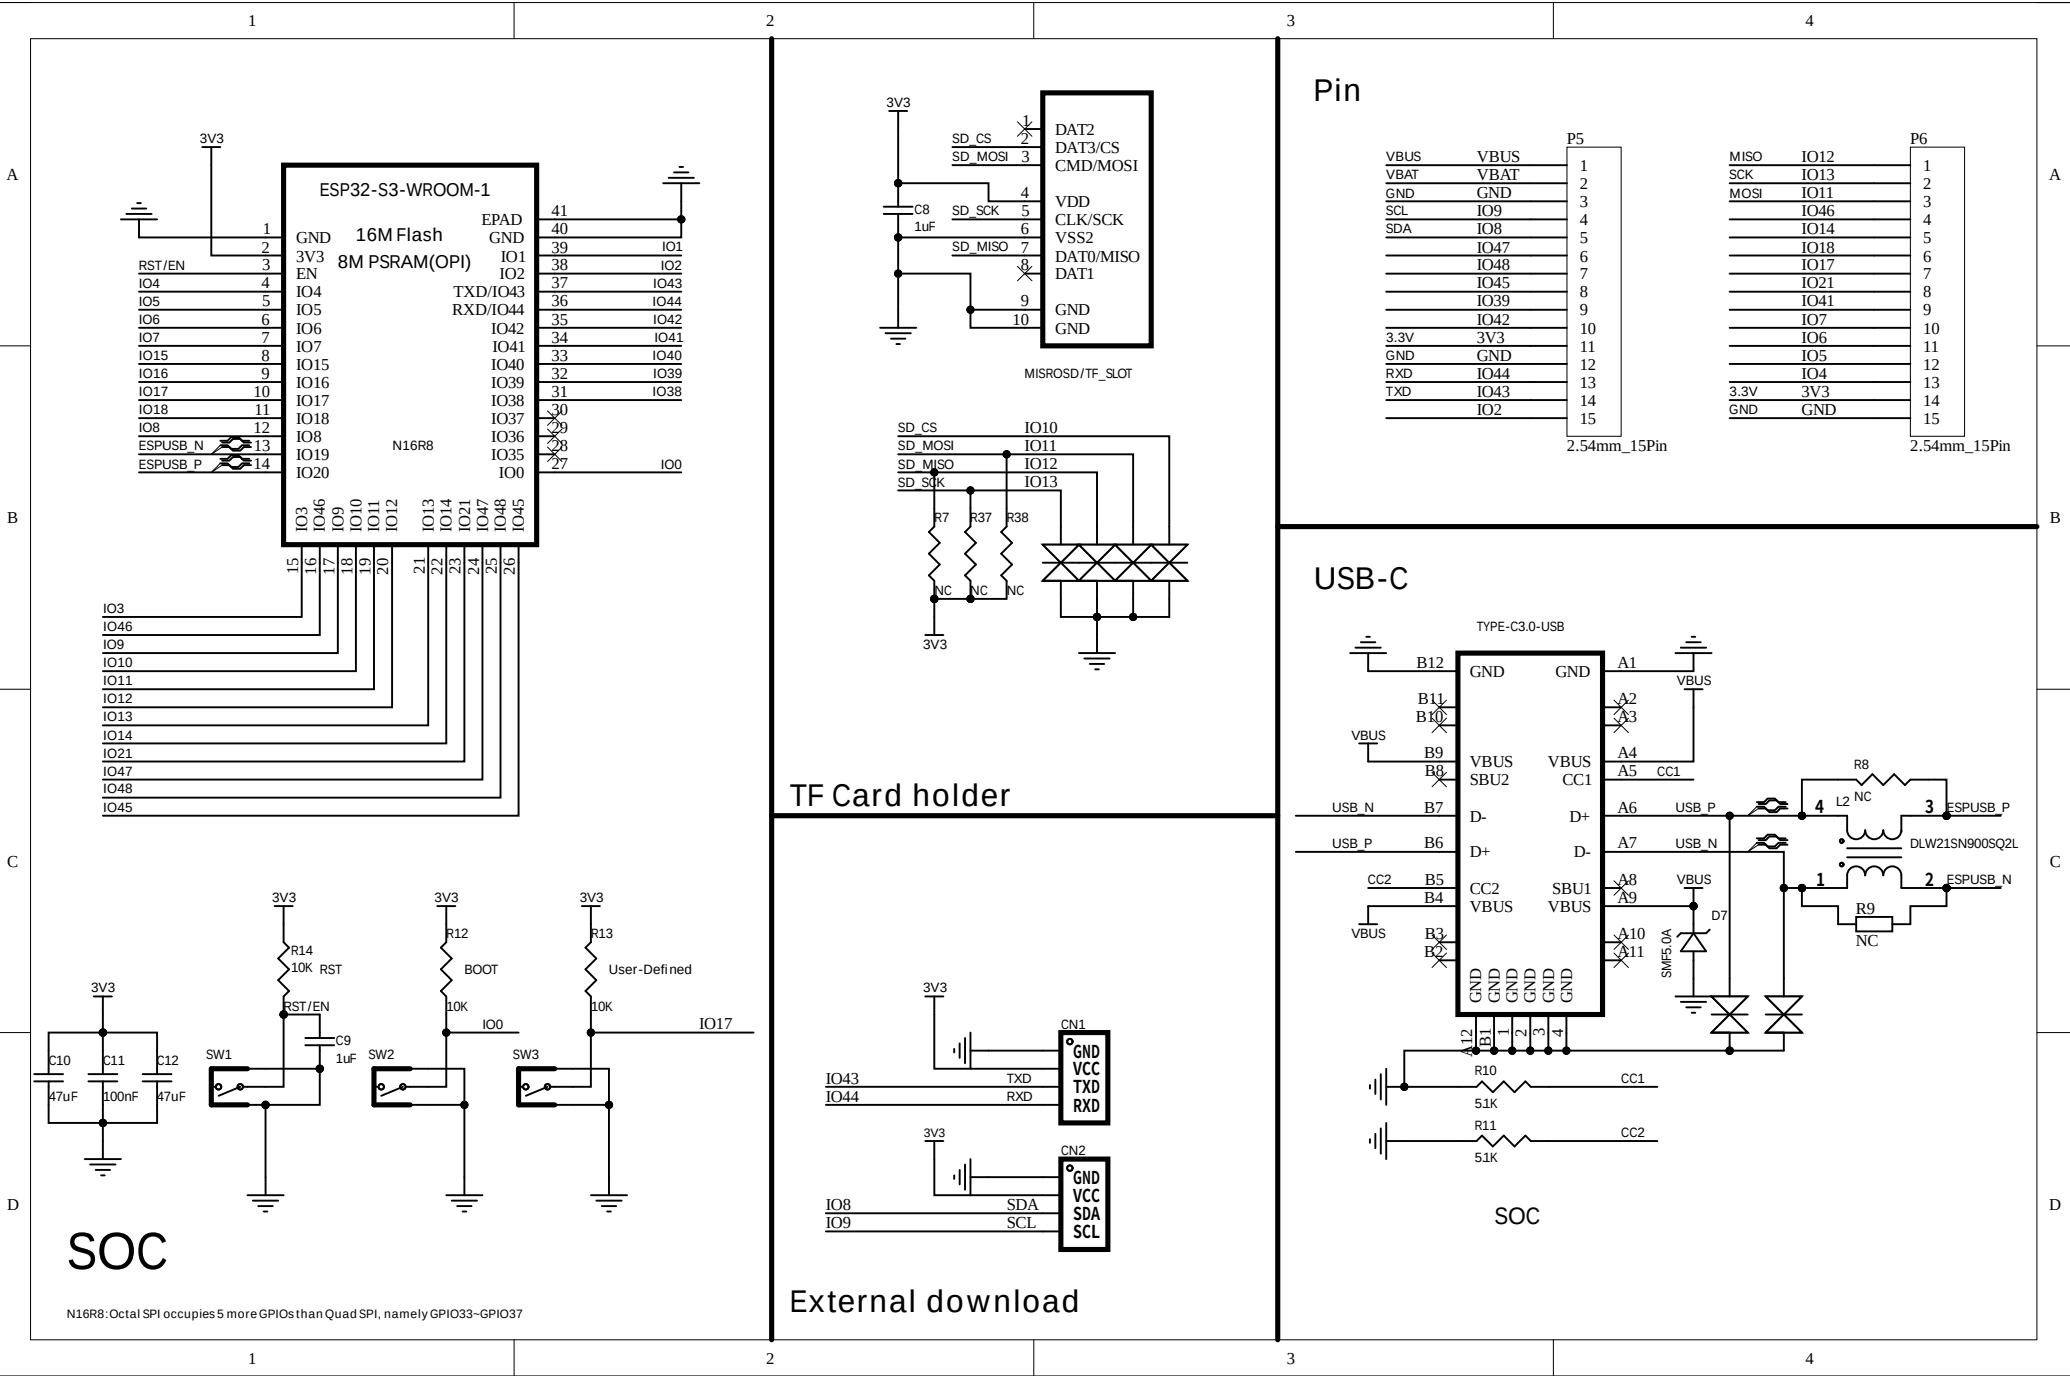

SOC

N16R8: Octal SPI occupies 5 more GPIOs than Quad SPI, namely GPIO33~GPIO37

TF Card holder


External download

Pin

USB-C

TYPE-C3.0-USB











SOC

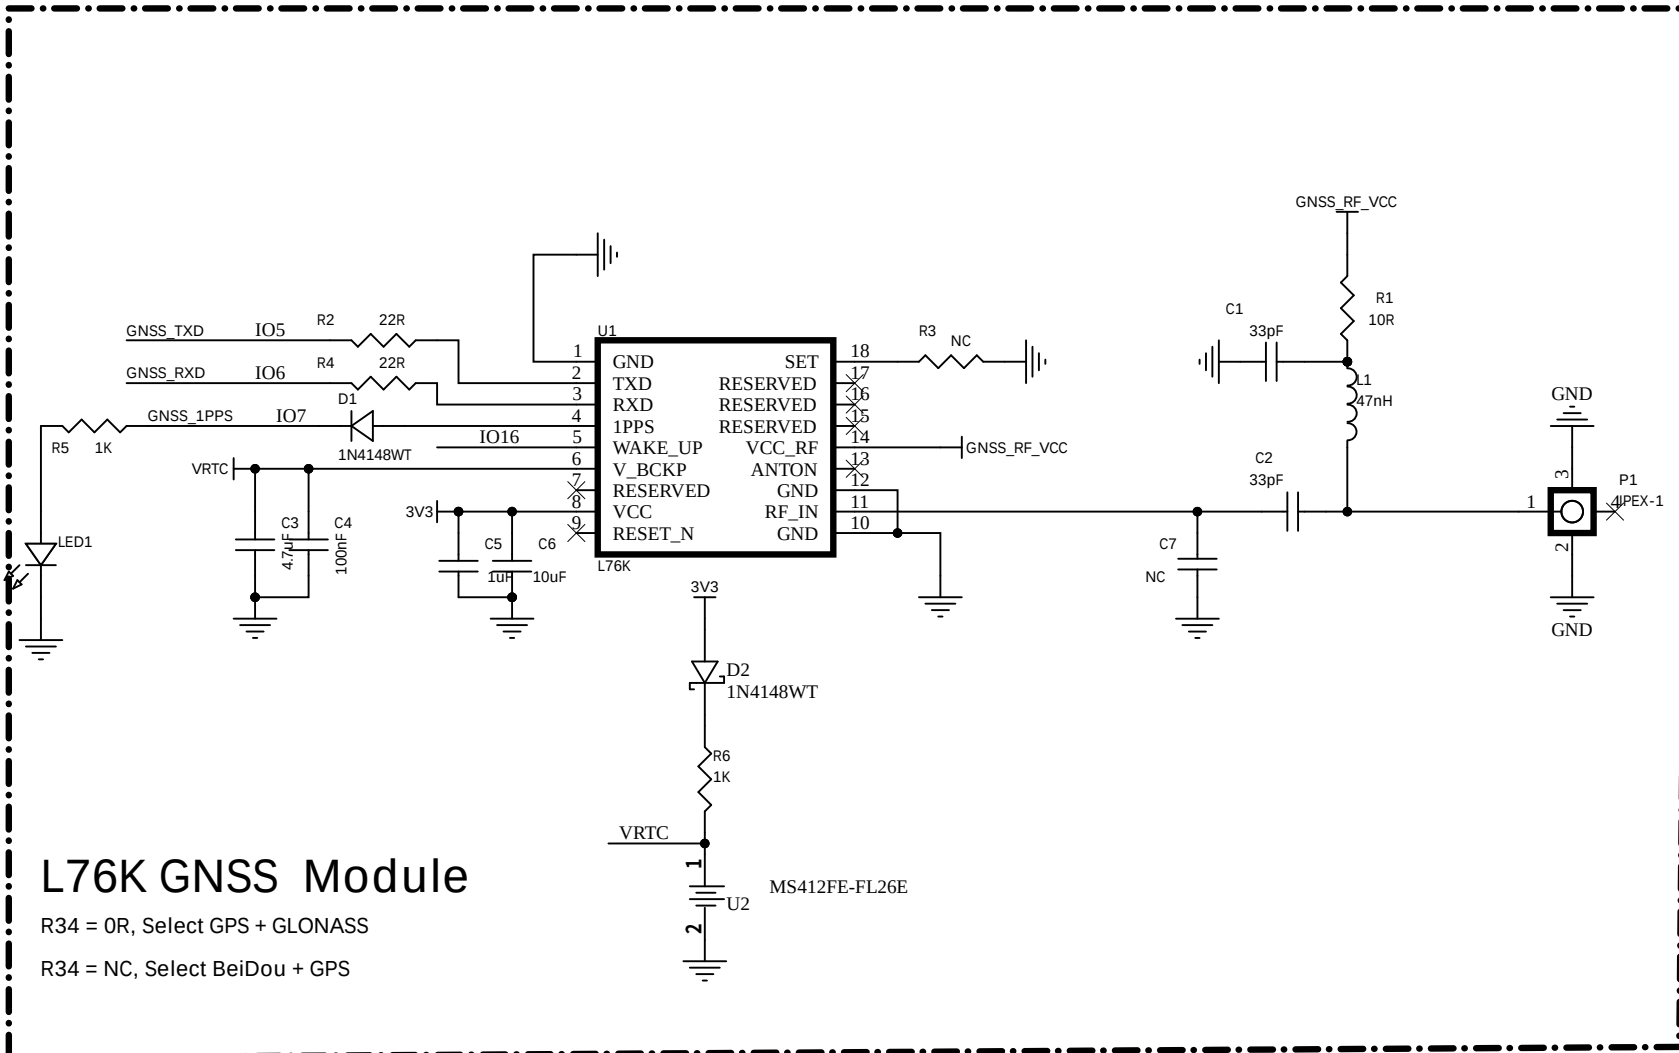


L76K GNSS Module

R34 = 0R, Select GPS + GLONASS


R34 = NC, Select BeiDou + GPS

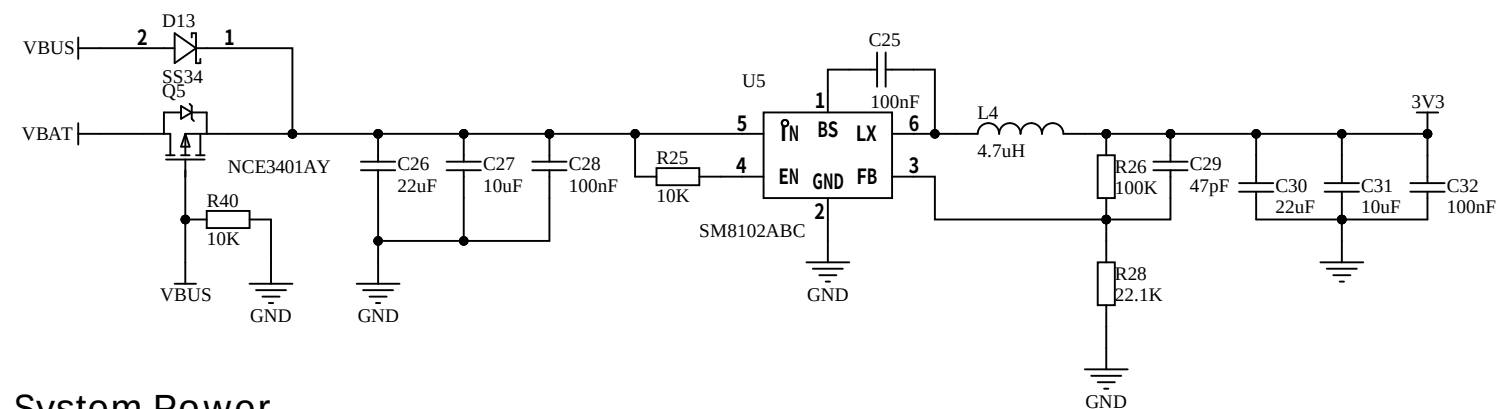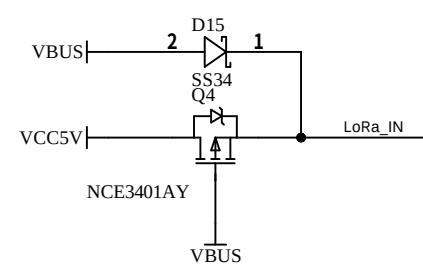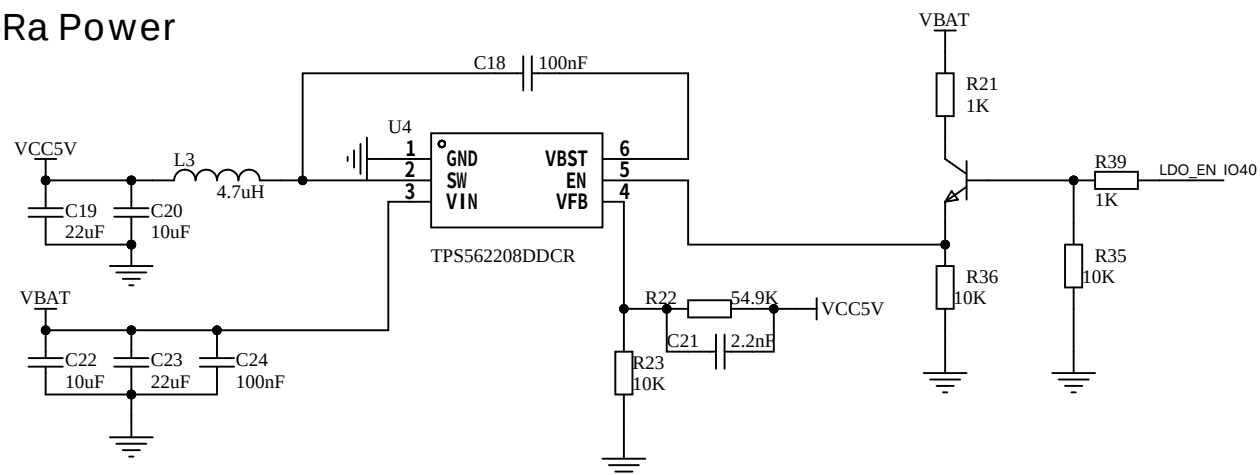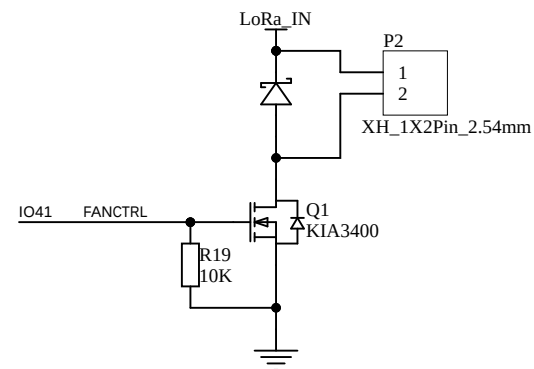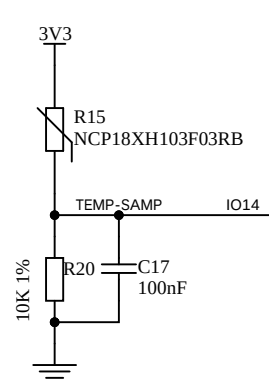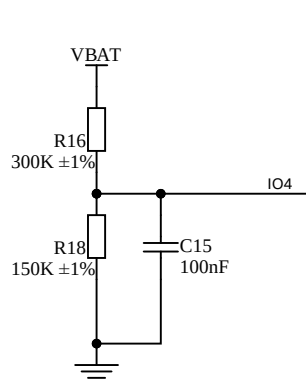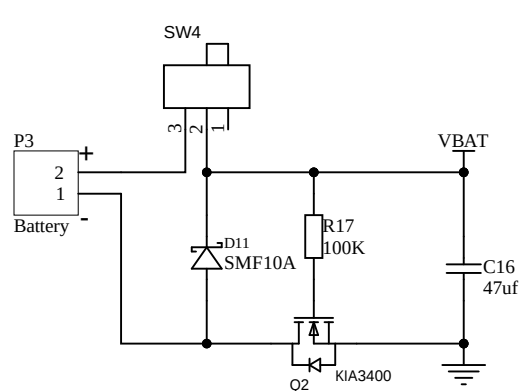

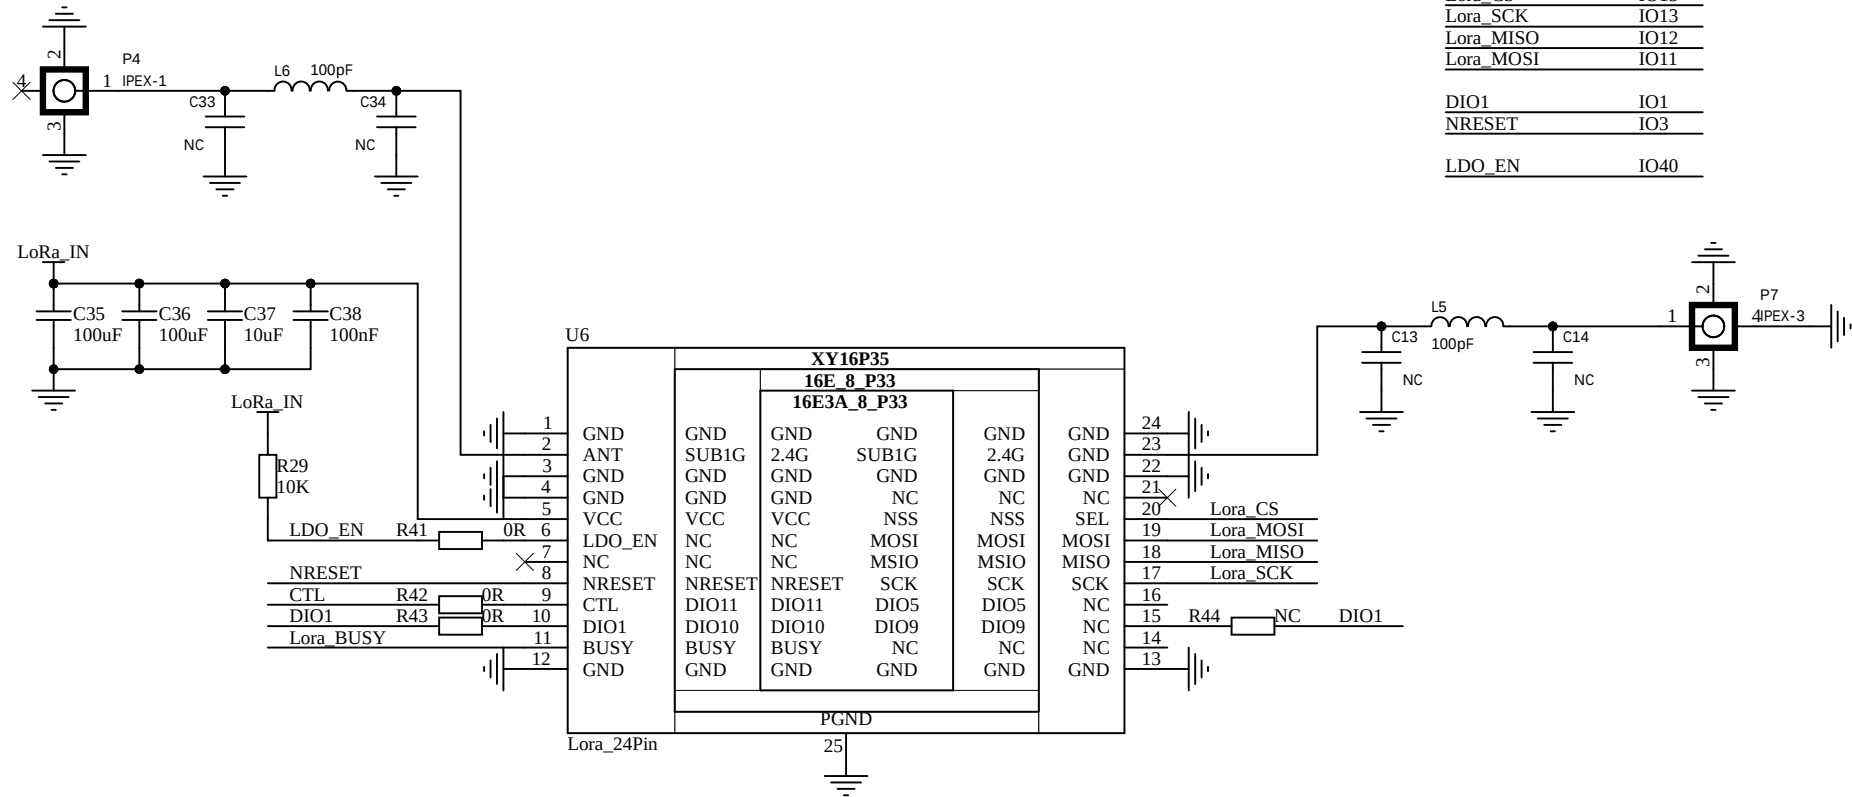

CTL	IO21
Lora_BUSY	IO38
Lora_CS	IO15
Lora_SCK	IO13
Lora_MISO	IO12
Lora_MOSI	IO11
DIO1	IO1
NRESET	IO3
LDO_EN	IO40

XY16P354: SX1262 433M
 XY16P358: SX1262 868M
 XY16E_4_P33:LR1121 433M
 XY16E_8_P33:LR1121 868M
 XY16E3A_4_P33:LR2021 433M
 XY16E3A_8_P33:LR2021 868M

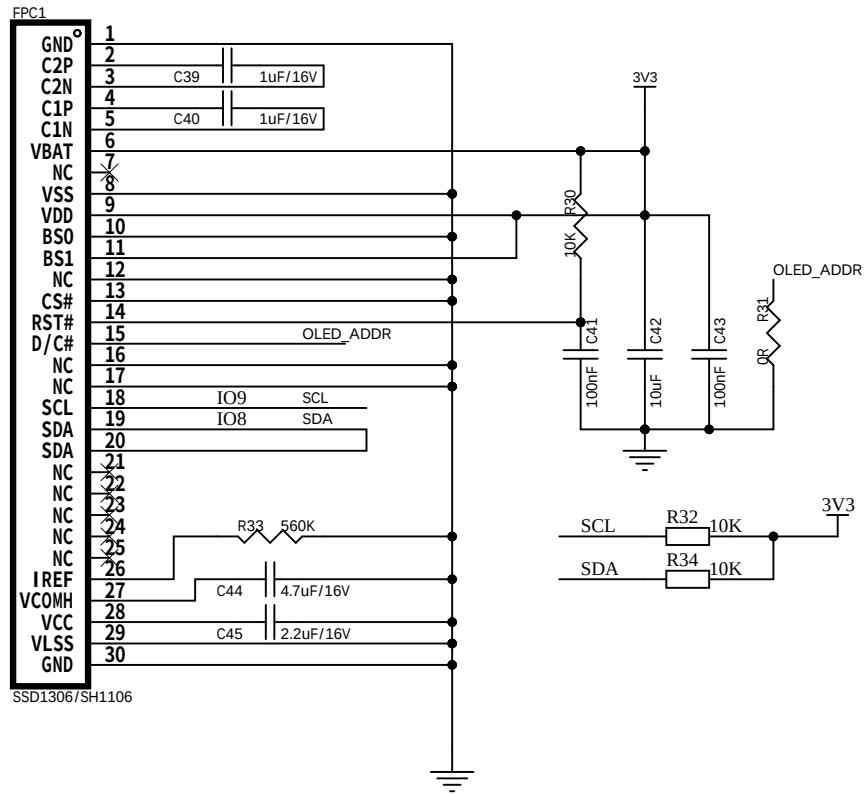

OLED Display

Slave 7 bit address definition:

VHF: R52 = 0R R51 = NC 0X3C