

深圳市千目通讯科技有限公司


Shenzhen Qianmu Communication Technology Co.,Ltd.

Antenna Acknowledgement

Applicable model	T3		
Customer	Core element		
Specification description			
	Product content	Specification	Customer material code
Specification description	868-915MHz Antenna	External glue stick antenna	
Change of resume			
Serial number	Date	Version	Brief description of the changes
1	2024-11-21	V1.0	New project
2			
3			

Supplier sample confirmation					
Research and development	Structure	Audit	Judgement		
			PASS FAIL		
Customer sample confirmation					
Electron	Structure	Project	Procurement	Quality	Audit
Reasons for rejection or other precautions:					

1、 Matching circuit-main antenna

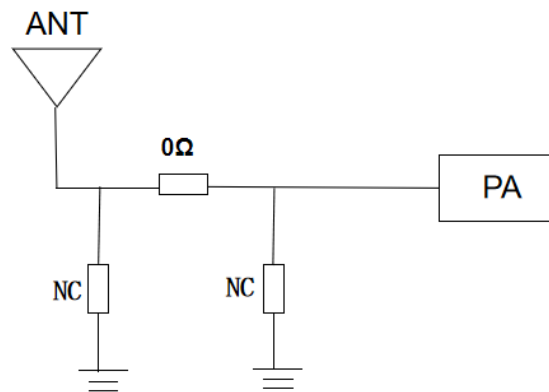


No changes have been made to your original matching circuit

2、 Antenna efficiency and gain

Frequency ID	1	2	3	4	5	6
Frequency (MHz)	865.0	875.0	885.0	895.0	905.0	915.0
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-8.70	-8.58	-8.45	-8.21	-8.19	-7.96
Peak EIRP (dBm)	-5.18	-4.69	-4.34	-3.72	-3.53	-3.33
Directivity (dBi)	3.52	3.90	4.12	4.49	4.66	4.62
Efficiency (dB)	-8.70	-8.58	-8.45	-8.21	-8.19	-7.96
Efficiency (%)	13.50	13.90	14.30	15.10	15.20	16.00
Gain (dBi)	-5.18	-4.69	-4.34	-3.72	-3.53	-3.33
NHPRP $\pm\pi/4$ (dBm)	-9.75	-9.64	-9.51	-9.26	-9.24	-9.00
NHPRP $\pm\pi/6$ (dBm)	-11.13	-10.99	-10.84	-10.58	-10.57	-10.35
NHPRP $\pm\pi/8$ (dBm)	-12.07	-11.87	-11.71	-11.46	-11.47	-11.30
Upper Hem. PRP (dBm)	-14.12	-14.05	-14.06	-13.98	-14.12	-13.99
Lower Hem. PRP (dBm)	-10.17	-10.03	-9.85	-9.54	-9.47	-9.20
Upper Hem. PRP (%)	3.87	3.93	3.93	4.00	3.87	3.99
Lower Hem. PRP (%)	9.62	9.92	10.35	11.11	11.31	12.02

3、Antenna pattern

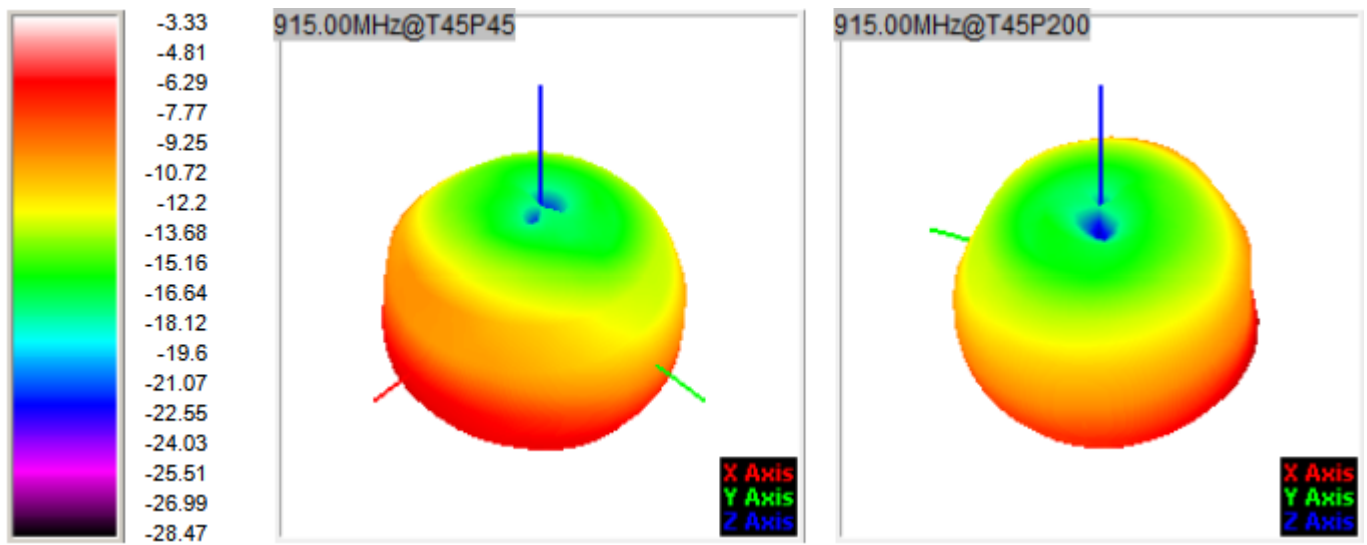

4、Engineering drawing

