





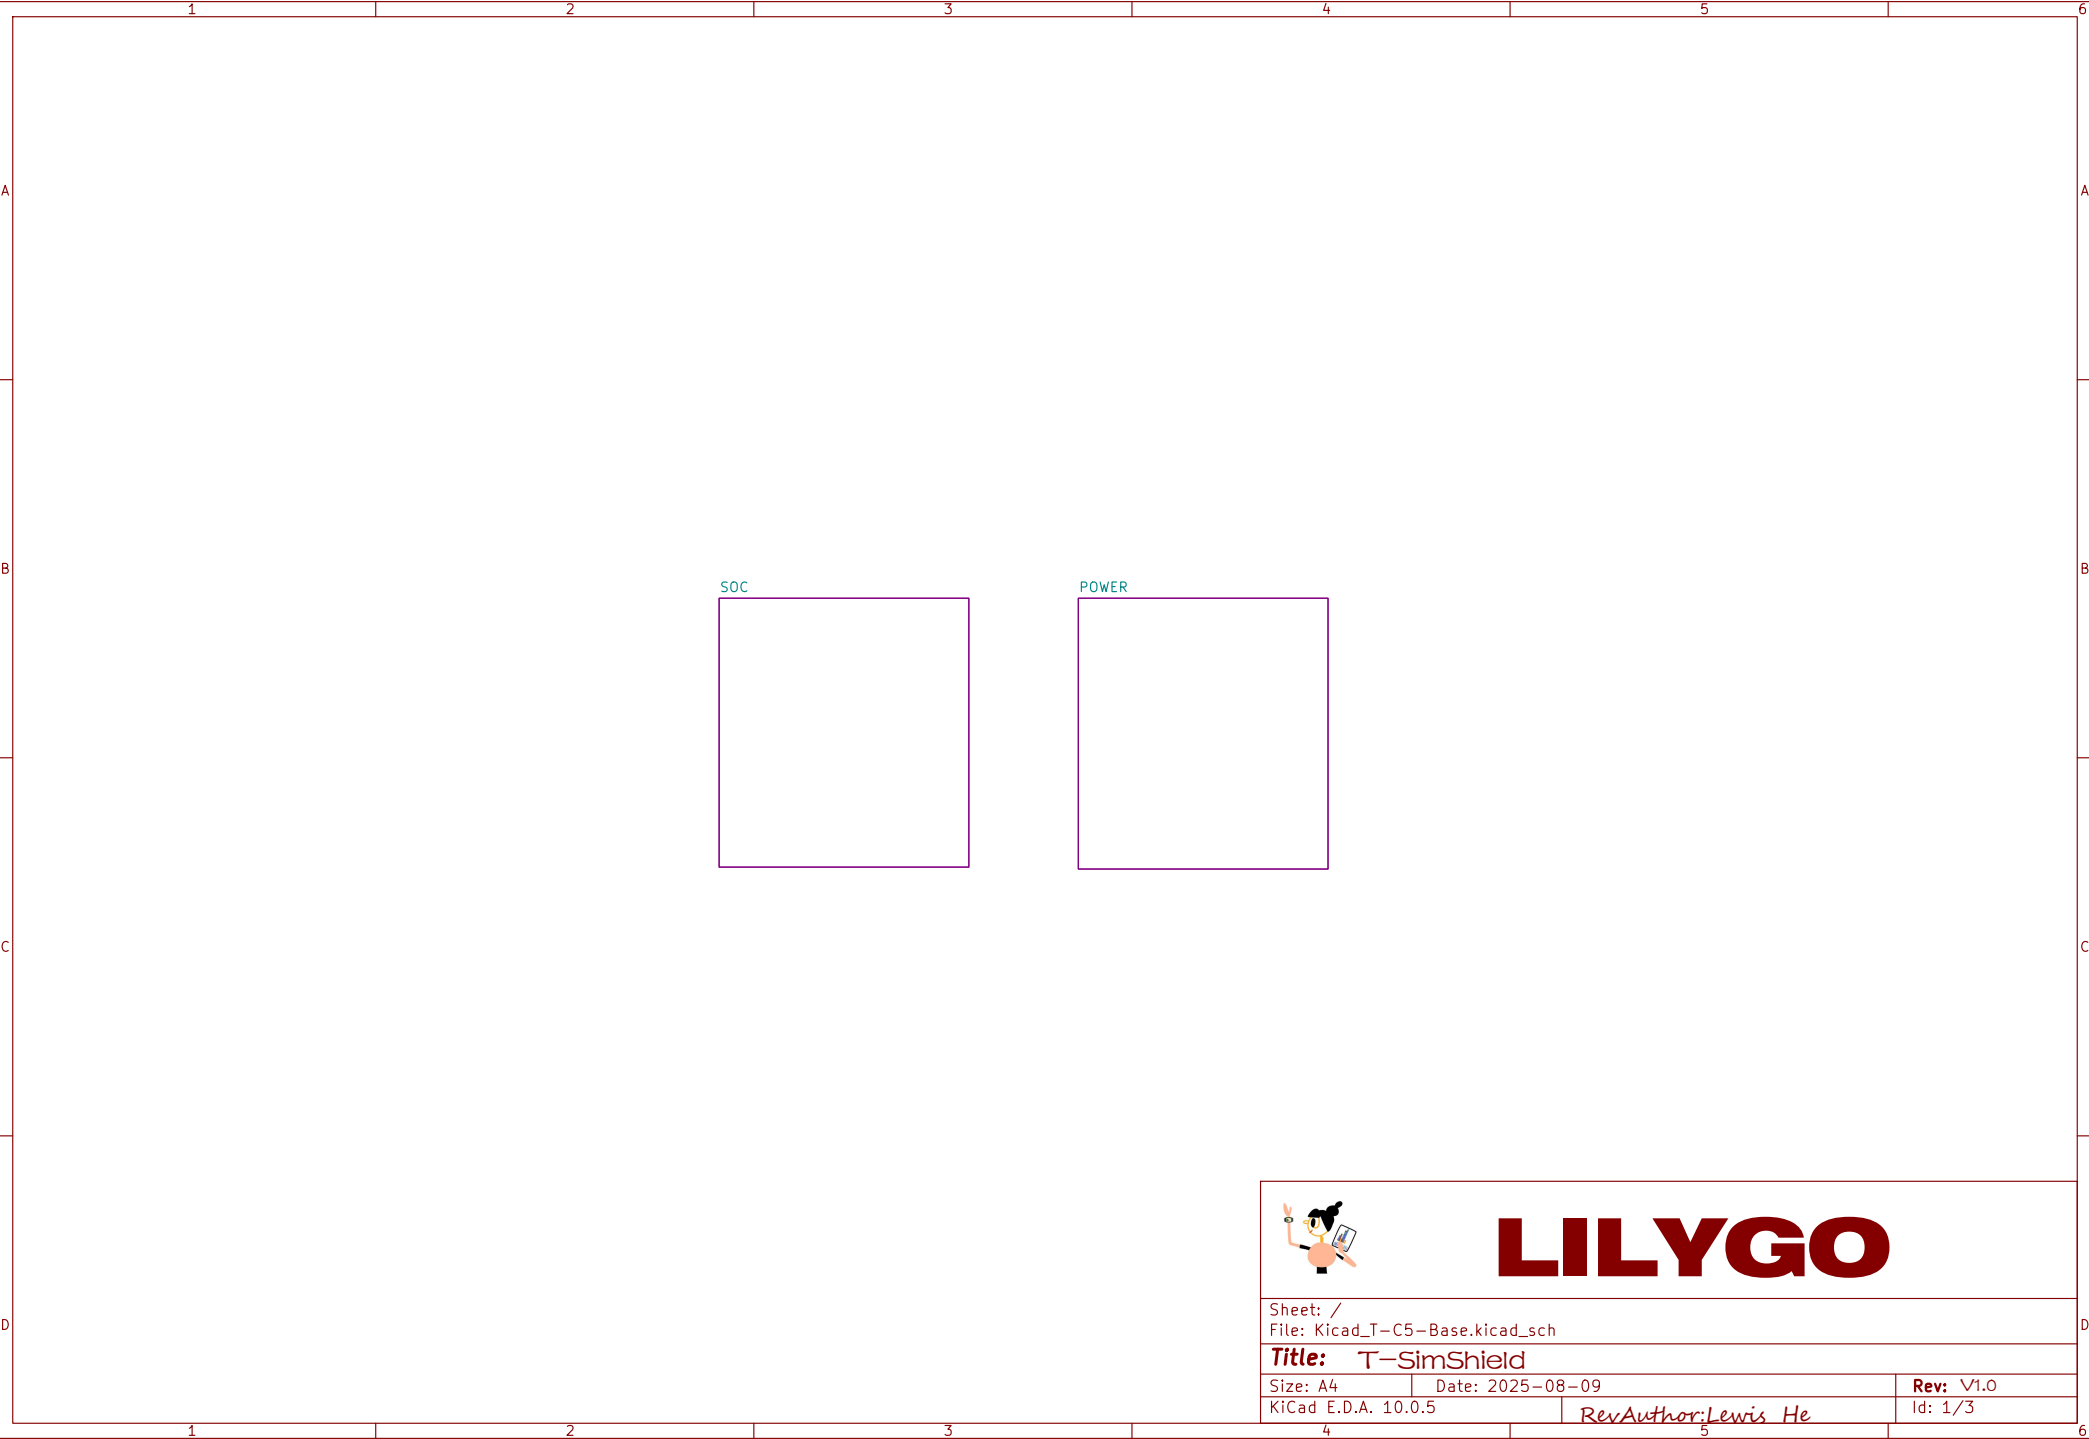


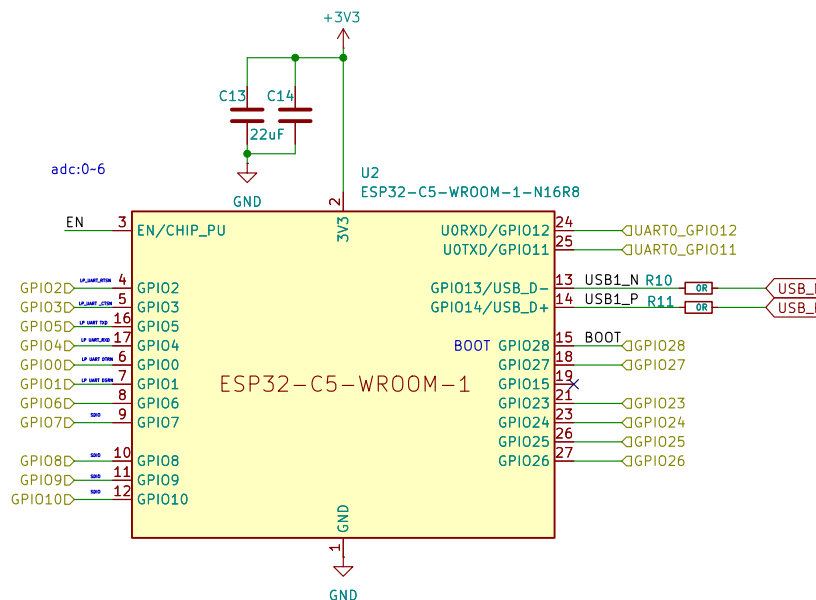

CAN Shield	CAN1 TX=26 CAN1 RX=25 CAN2 TX=0 CAN2 RX=1
RS485 Shield	RS4851 TX=5 RS4851 RX=4 RS4852 TX=23 RS4852 RX=24 RS4852 DTR=7

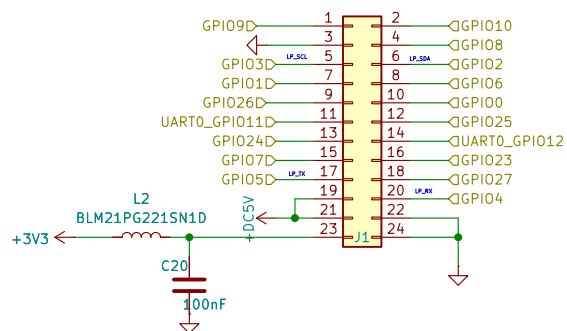

GPIO15 is already being used as SPICS1 for SPI PSRAM and cannot be used for other functions.

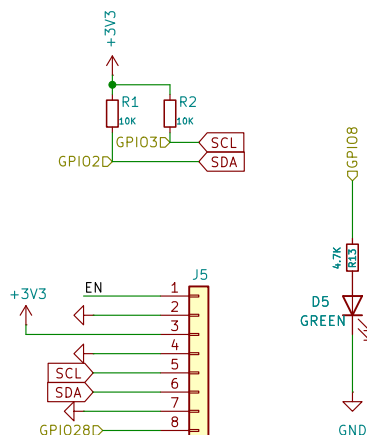



LILYGO


Sheet: /SOC/
File: SOC.kicad_sch

Title: T-C5-Base

Size: A4
KiCad E.D.A. 10.0.5

Date: 2026-08-17
RevAuthor: Lewis He

Rev: V1.0
Id: 2/3

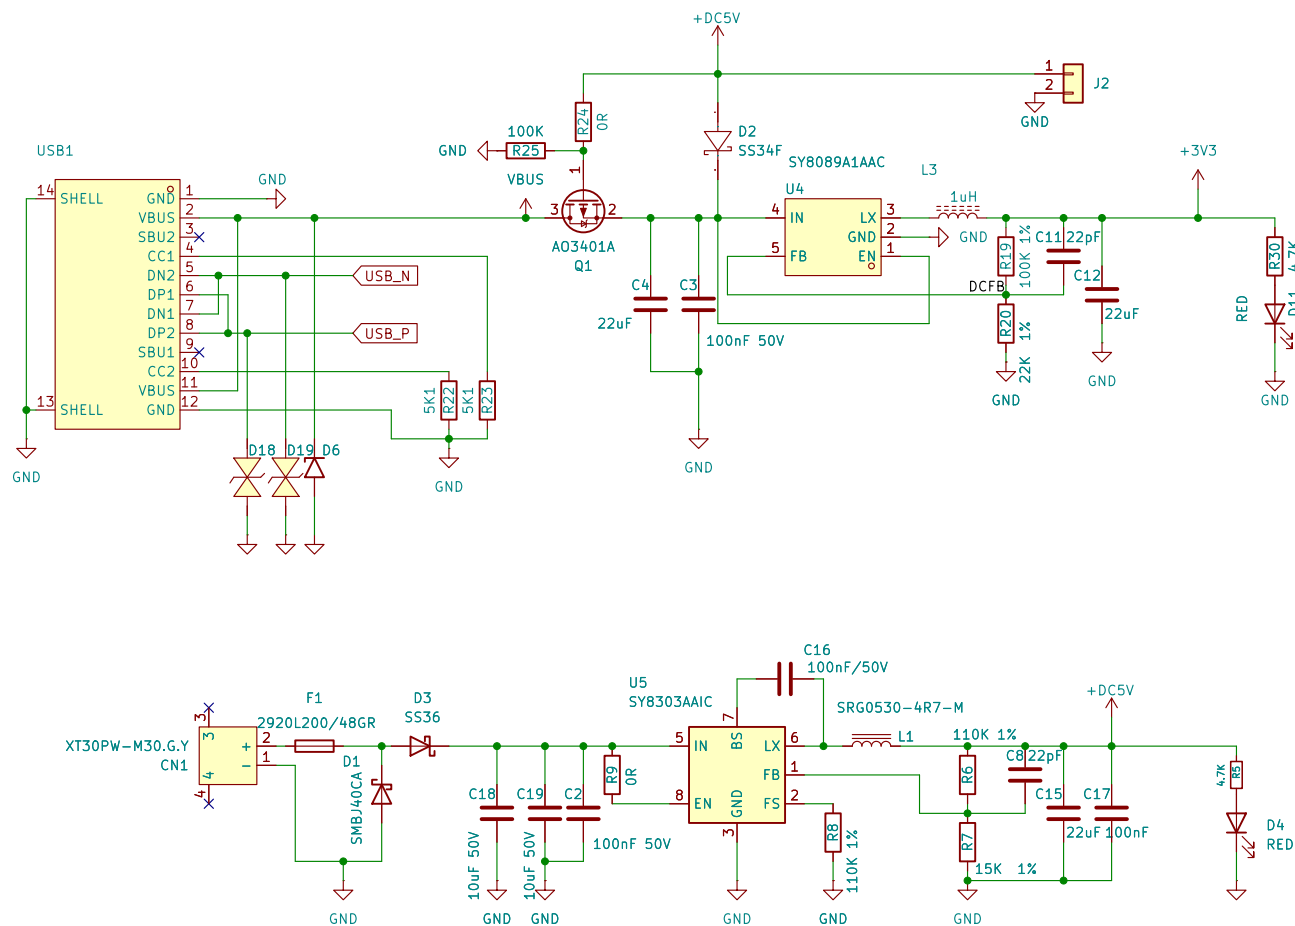

LILYGO

Sheet: /POWER/
File: POWER.kicad_sch

Title: T-C5-Base

Size: A4 Date: 2026-08-17

KiCad E.D.A. 10.0.5

RevAuthor: Lewis He

Rev: Rev 1.0

Id: 3/3