

T-CameraPlus-S3_V1.2 Power Consumption Test Log

Date: 20250408
LastEditTime: 20250408
Test board: T-CameraPlus-S3_V1.2 (202503071622)
Software name: Deep_Sleep_Wake_Up.ino
Testing organization: LILYGO Laboratory

1. Test Environment Description



1.1 测试环境
1.1 Test environment

Test Tools	Sampling speed	Test Methodology	Input voltage	Test environment temperature
BLU939	100000 times/s	Battery Interface Measurement	+4.0V	25°C/77°F

1.2 测试的器件型号
1.2 Test device model

Test device	MCU	Power amplifier	Microphone	Camera
Corresponding model	ESP32S3	MAX98357AETE+T	MP34DT05TR-A	OV2640

2. Test Physical Object Image

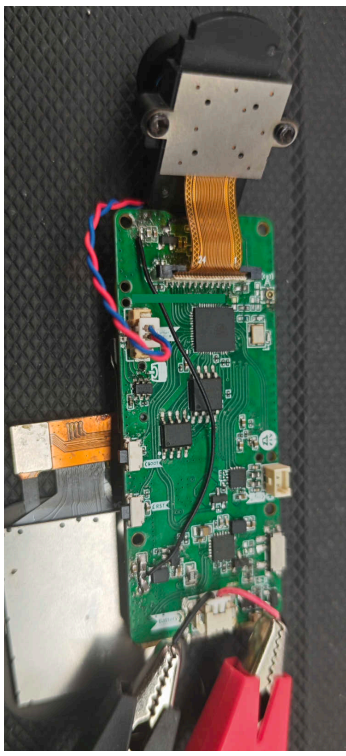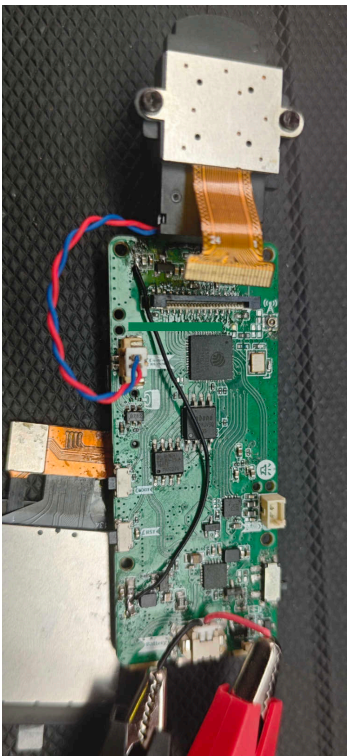

4. Power consumption testing


4.1 连接摄像头OV2640总电流变化测试图如下

4.1 The following is the current change test diagram for connecting the OV2640 camera.



4.2 不连接摄像头OV2640总电流变化测试图如下


4.2 The following is the total current change test diagram without connecting the OV2640 camera.

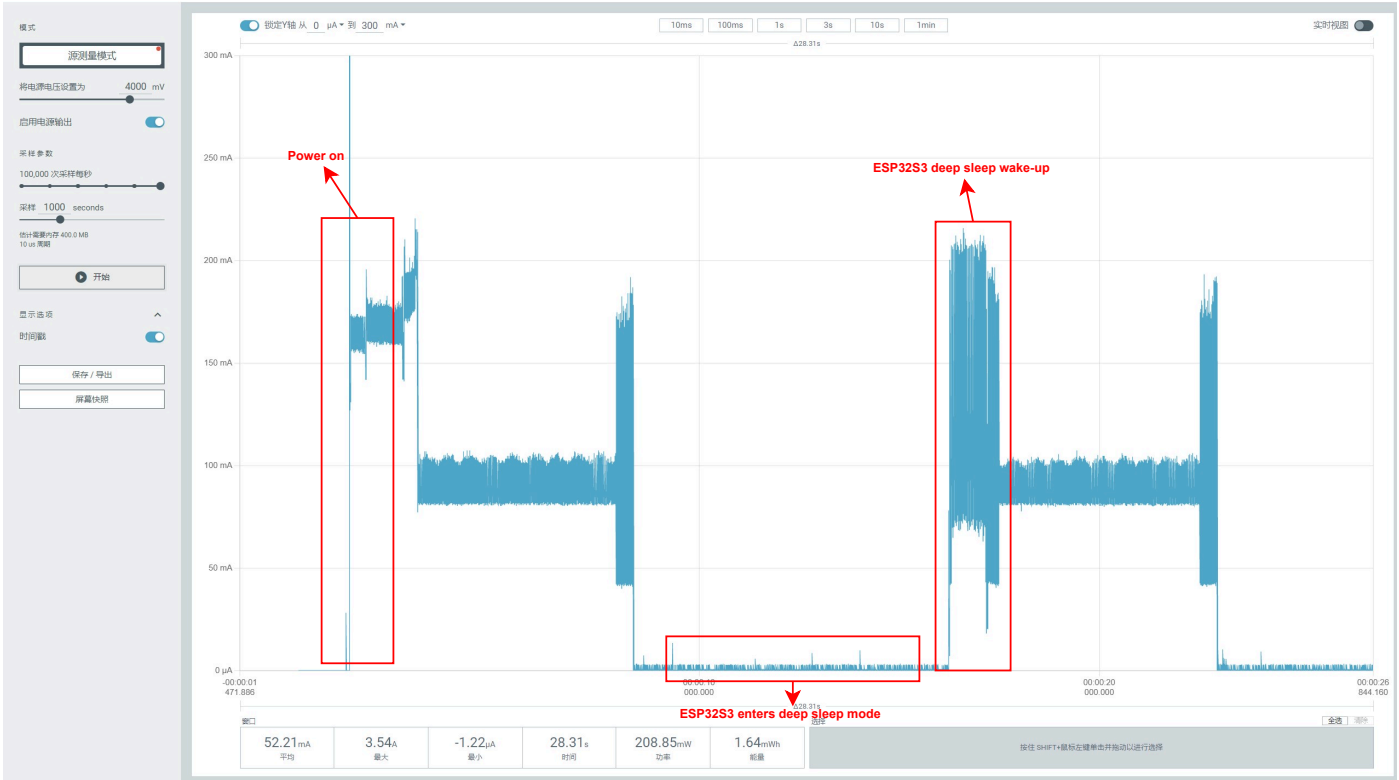

4.3 连接摄像头OV2640深度睡眠测试图如下
4.3 The following is the deep sleep test diagram when connecting the OV2640 camera.

ESP32S3	Power amplifier	Microphone	Camera
Deep Sleep	OFF	OFF	POWER DOWN

Test result: average 1.76 mA

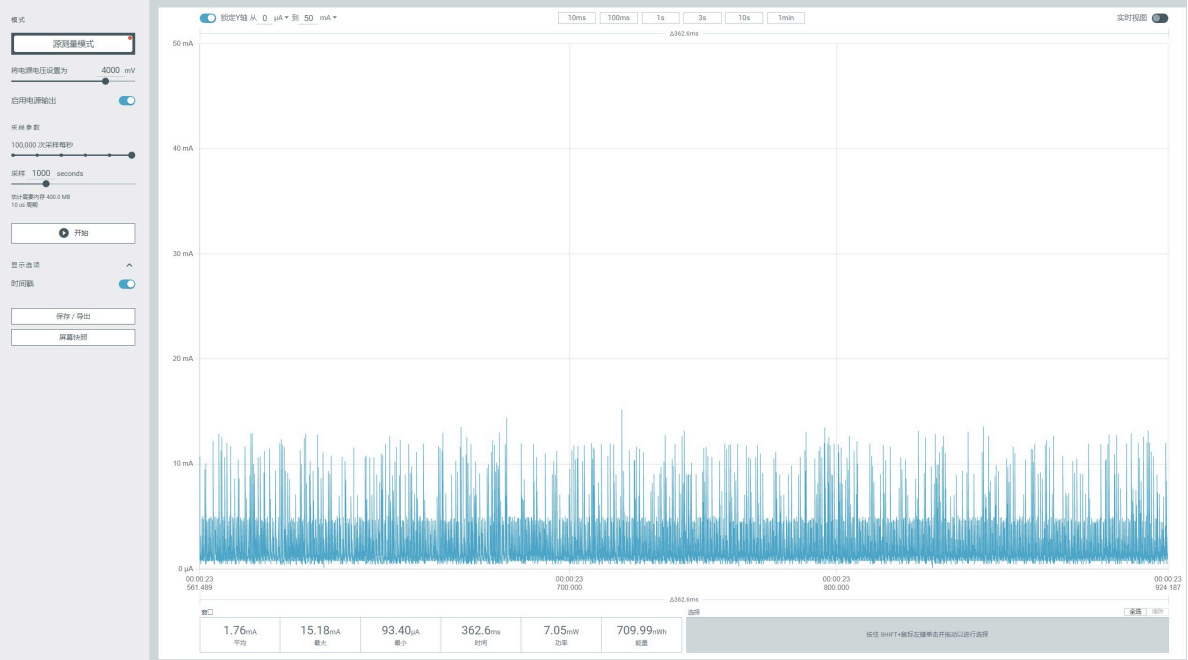

4.4 不连接摄像头OV2640深度睡眠测试图如下
4.4 The following is the deep sleep test diagram without connecting the OV2640 camera.

ESP32S3	Power amplifier	Microphone	Camera
Deep Sleep	OFF	OFF	NULL

Test result: average 146.42 μA

