

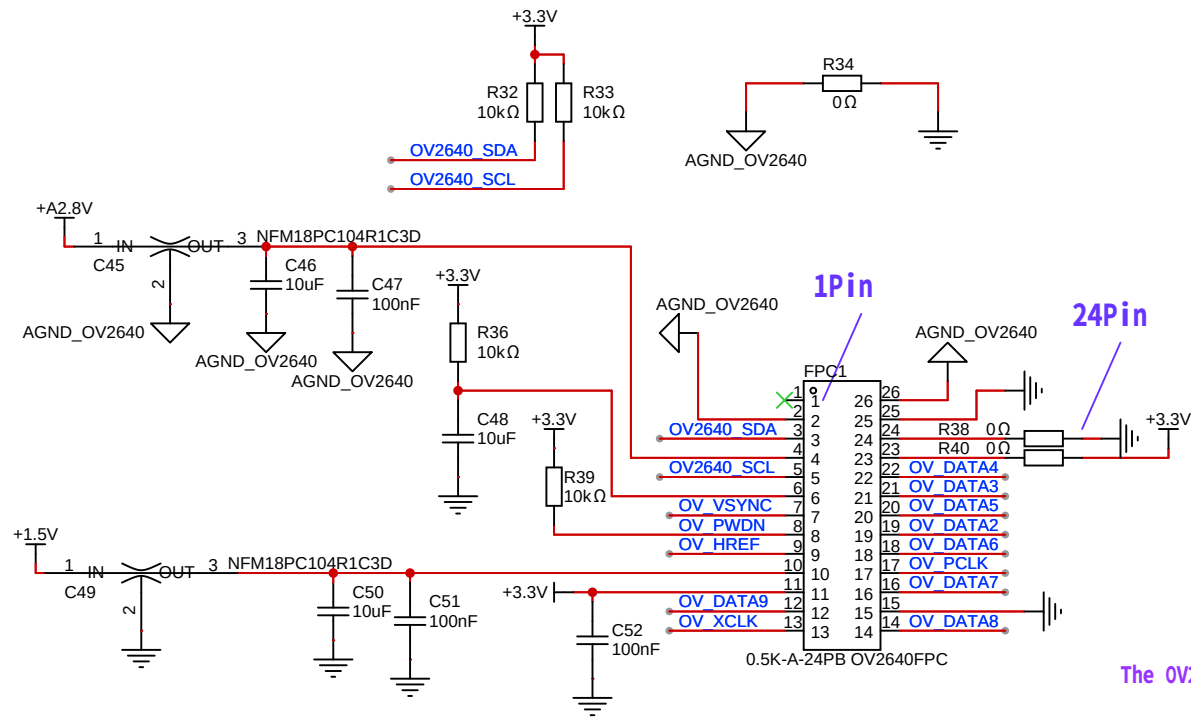
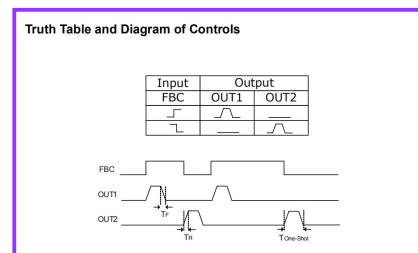


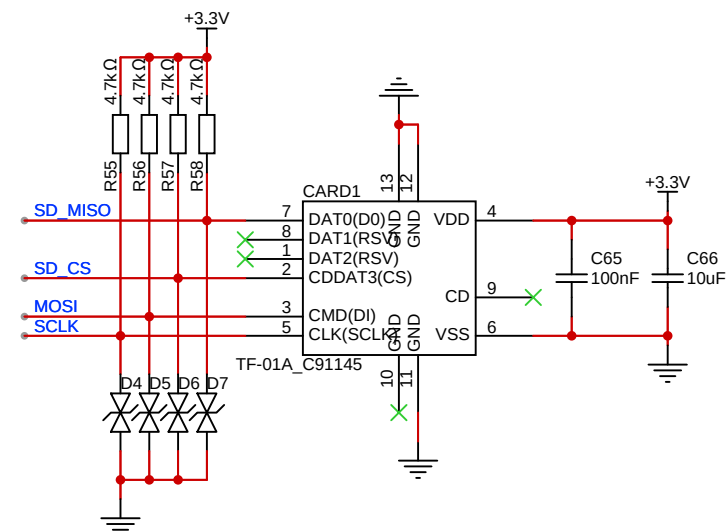

The OV2640 pin tag reference diagram

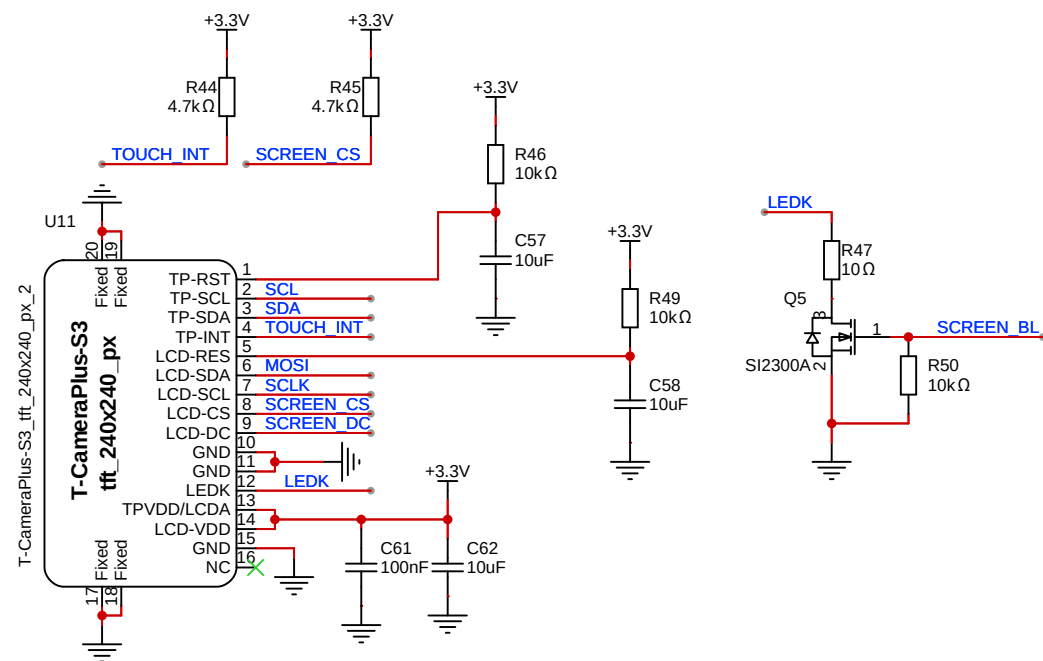

The period of TOne-Shot is determined by the external capacitor connected on CE pin. It can be estimated from the equation:
 $T(\text{one-Shot}) = 1.3 \times 10^6 \times C(\text{CE}) (\text{second})$

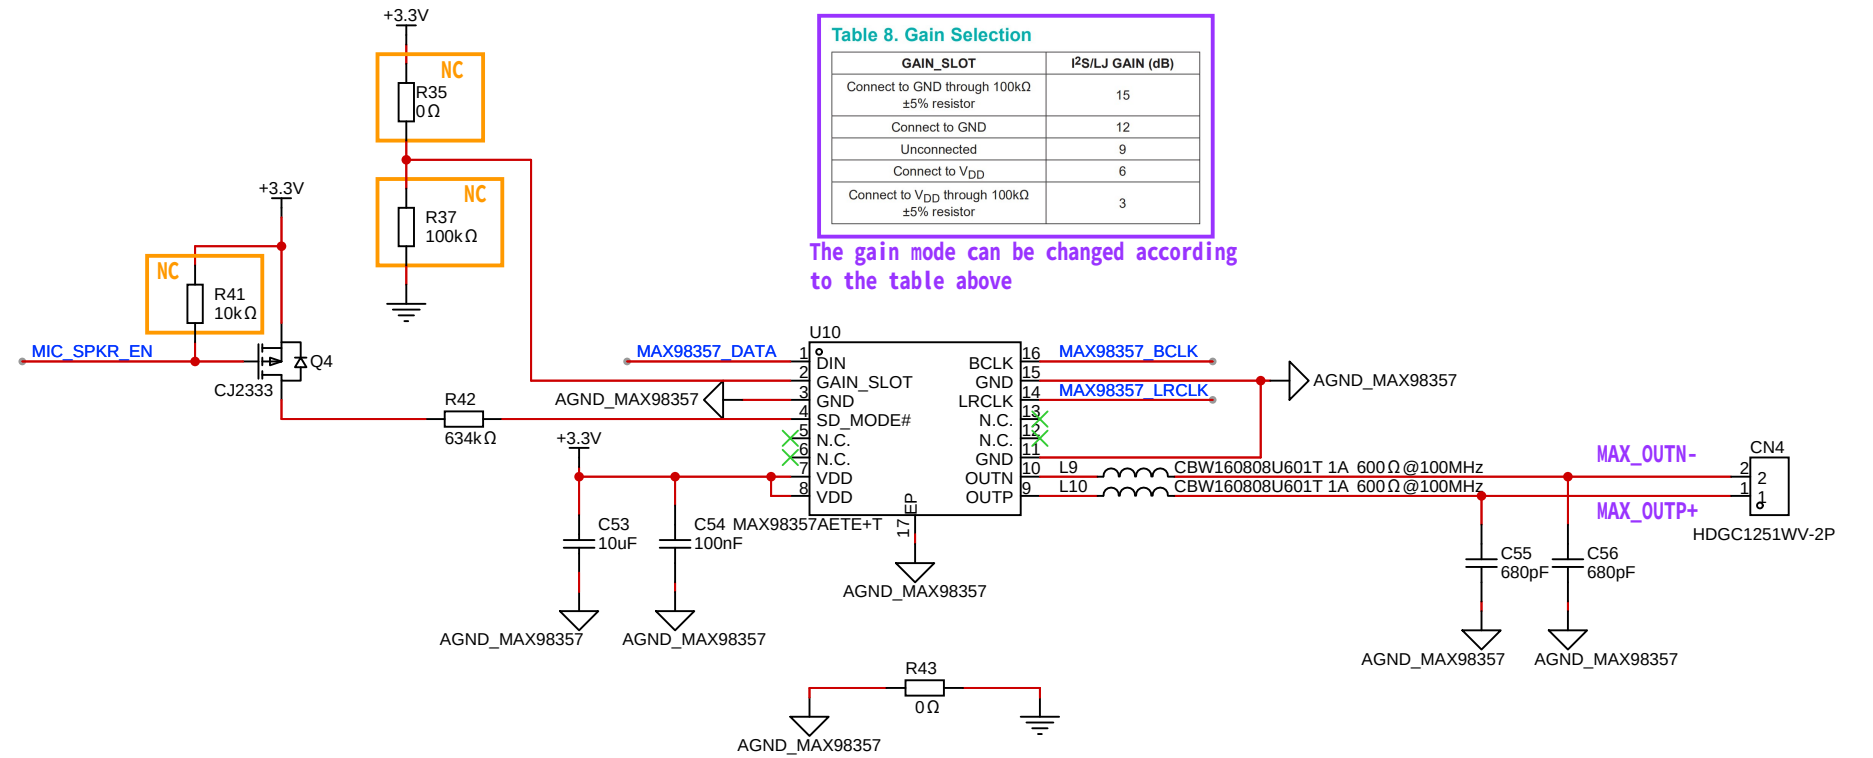
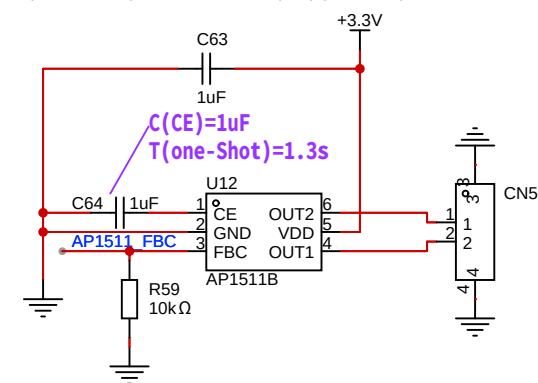


Table 5. SD_MODE Control

SD_MODE STATUS	SELECTED CHANNEL
High	Right
Pullup through R_{pullup}	Right
Low	Left
Pullup through R_{pullup}	Left
Low	Shutdown

Table 6. Examples of SD_MODE Pullup Resistor Values

LOGIC VOLTAGE LEVEL (V_{DDOL}) (V)	R_{pullup} (kΩ)	R_{pullup} (kΩ)
1.8	69.9	300
3.3	210.2	634

Table 8. Gain Selection

GAIN_SLOT	I _S /I _J GAIN (dB)
Connect to GND through 100kΩ	15
±5% resistor	12
Connect to GND	9
Unconnected	6
Connect to V _{DD}	3

The gain mode can be changed according to the table above

