

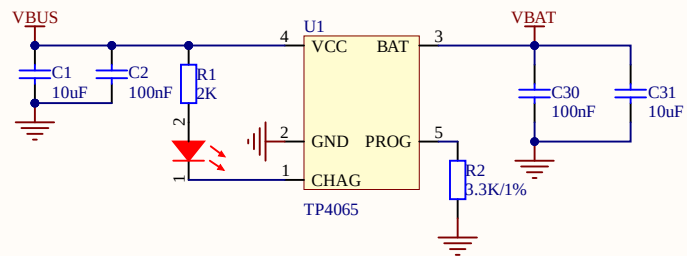
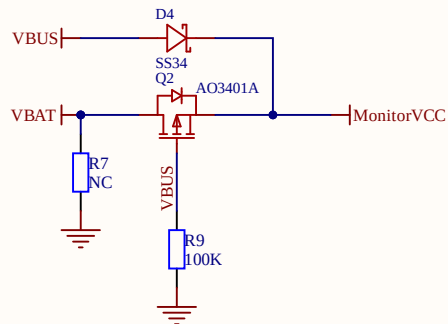
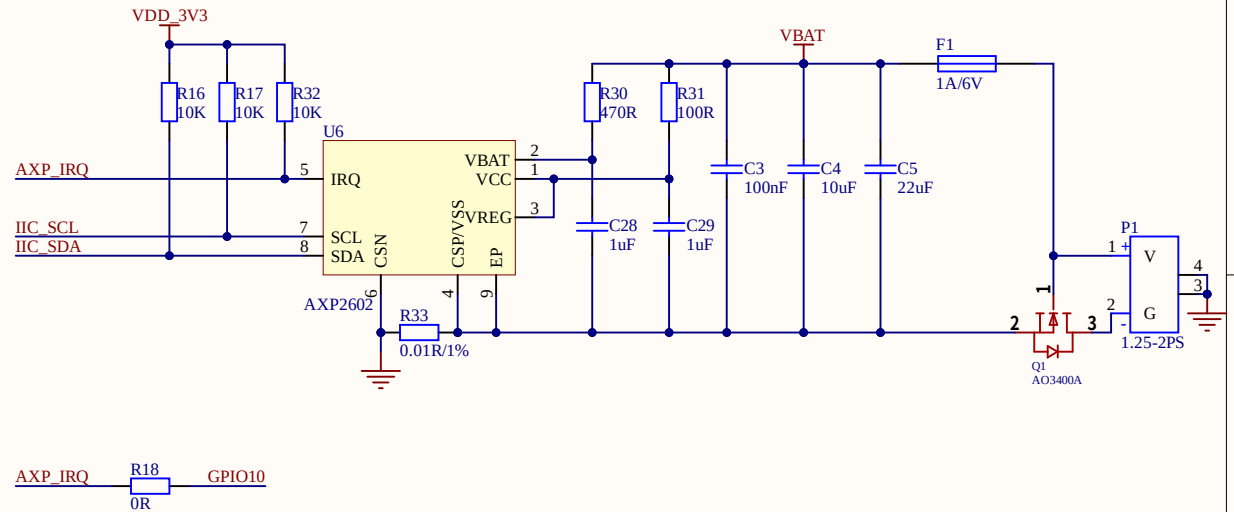


USB

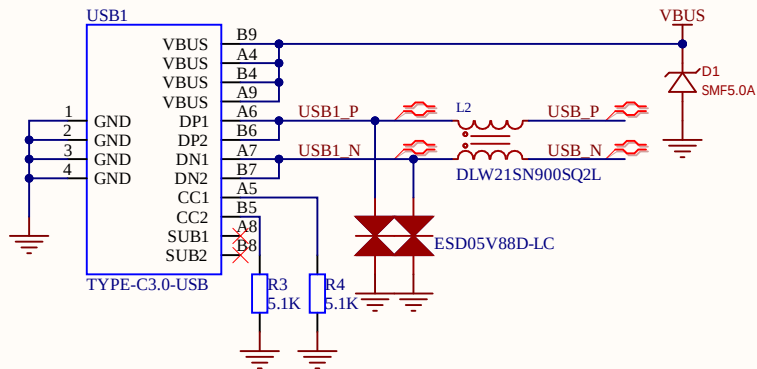


$$\text{公式一: } R_{PROG} = \frac{900}{I_{BAT}} \quad (I_{BAT} \leq 0.3A)$$

$$\text{公式二: } R_{PROG} = \frac{1160}{I_{BAT}} \quad (I_{BAT} > 0.3A)$$

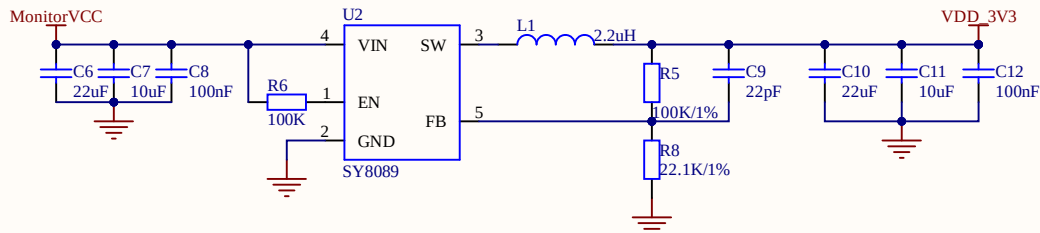


Title T-Display C5.PriPcb			
Page Name Power.SchDoc			Revision V1.0
Size: A3	Date: 2026/5/18	Sheet 1 of 3	Drawn By: Wendy
Notes:			





RESET

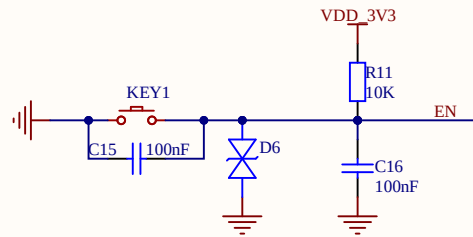

BOOT




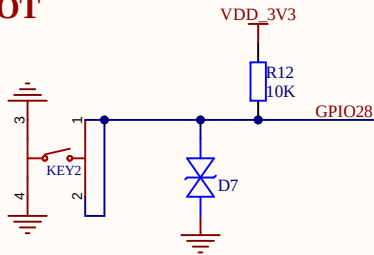


User-defined

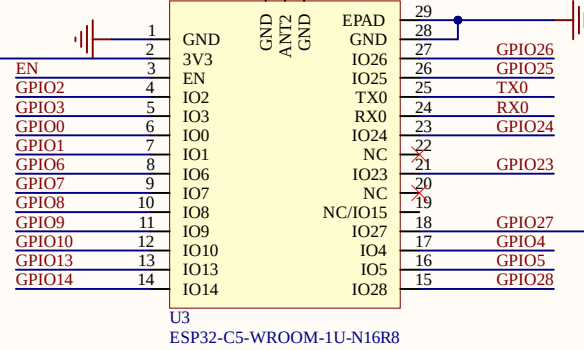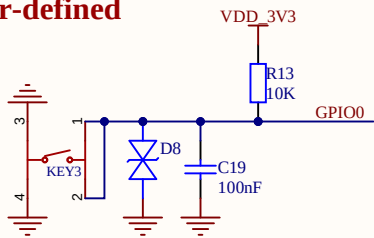


Strapping Pin:
GPIO25, GPIO26, GPIO27, GPIO28,
GPIO7, MTMS, MTDI



ADC:
GPIO0, GPIO1, GPIO2, GPIO3, GPIO4,
GPIO5, GPIO6

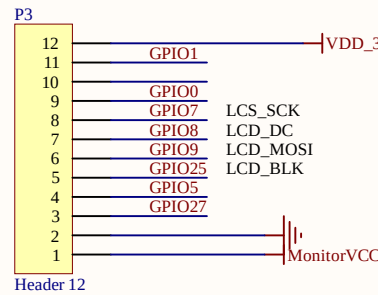

Title		T-Display C5.PrjPcb	
Page Name		ESP32-C5.SchDoc	
Revision		V1.0	
Size: A3	Date: 2026/5/18	Sheet 2 of 3	Drawn By: Wendy
Notes:			

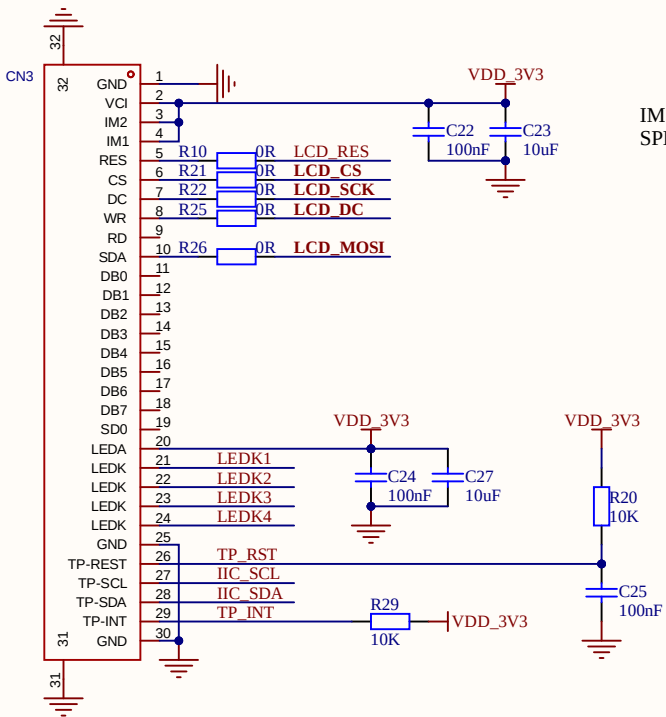

IM1=1, IM2=1
SPI 4W

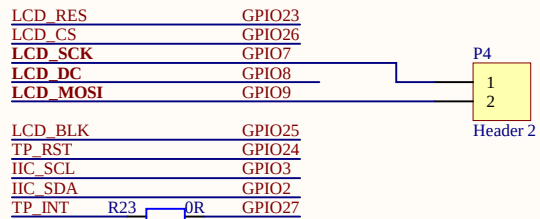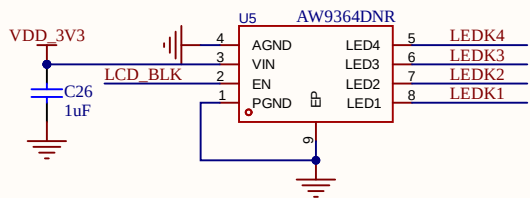

Title				T-Display C5.PrjPcb			
Page Name				Display.SchDoc			
Revision				V1.0			
Size:	A3	Date:	2026/5/18	Sheet	3 of 3	Drawn By:	Wendy
Notes:							