

1

2

3

4

A

B

C

D

JLC06161H-3313

沉金，板厚：1.6mm

	信号层	参考层	线宽	线距	计算阻抗	目标阻抗	阻抗值公差范围
单端	L1 & L6	L2 / L5	5	/		50	±10
	L3 & L4	L2 / L5	4	/		50	±10
差分	L1	L2 / L5	4.5	4.5		90	±10
	L1	L2	4.5	9		100	±10

TitleP1		
SizeA4	Number	RevisionV1.0
Date:6/26/2026	Sheet of	
File:C:\XY Project\..1_P1.schdoc	Drawn By: LILYGO	

1

2

3

4

A

B

C


D

A

B





C

D

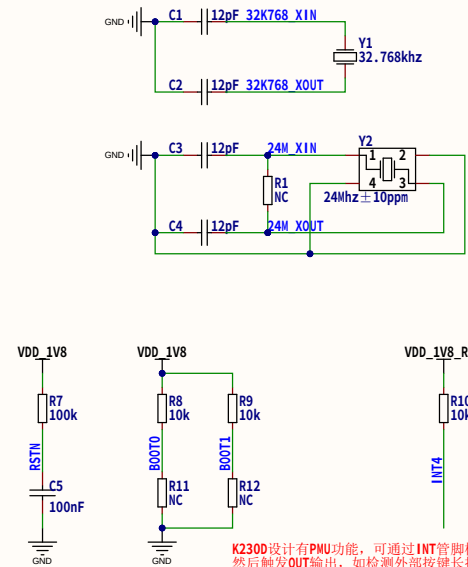

BOOT0 = 0, BOOT1 = 0, SPI Nor
BOOT0 = 0, BOOT1 = 1, eMMC
BOOT0 = 1, BOOT1 = 0, SPI Nand
BOOT0 = 1, BOOT1 = 1, SD Card

前置条件: VDD1V8_RTC供电, 32.768kHz晶振提供
INT0设计为长按3s后OUT0输出高电平
INT4设计为检测到上拉, OUT0立即输出高电平

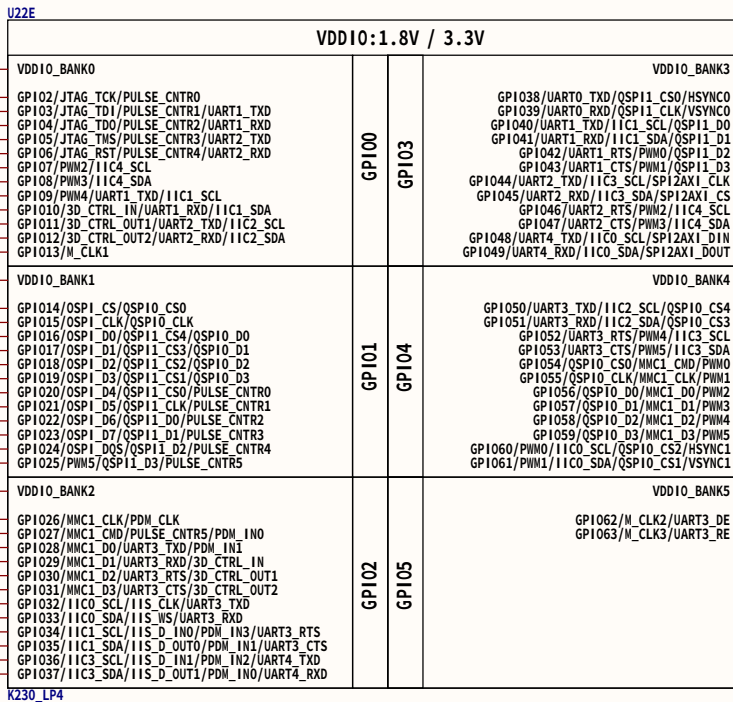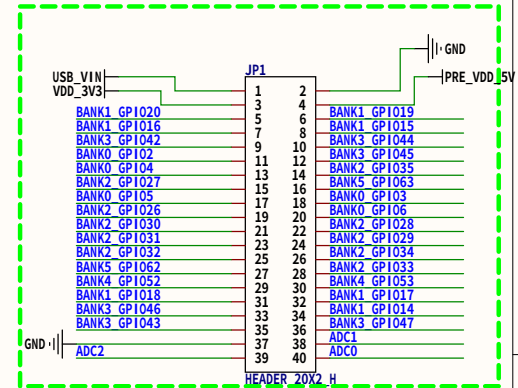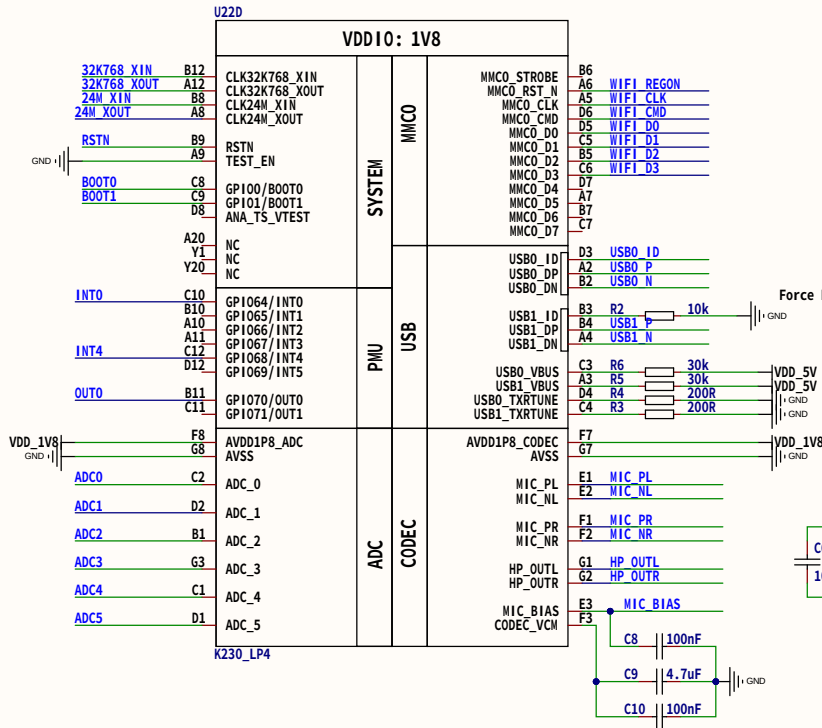

Title K230		
Size A3	Number	Revision V1.0
Date: 6/26/2026		Sheet of
File: C:\XY Project\2_K230.schdoc		Drawn By: LILYGO








4













E



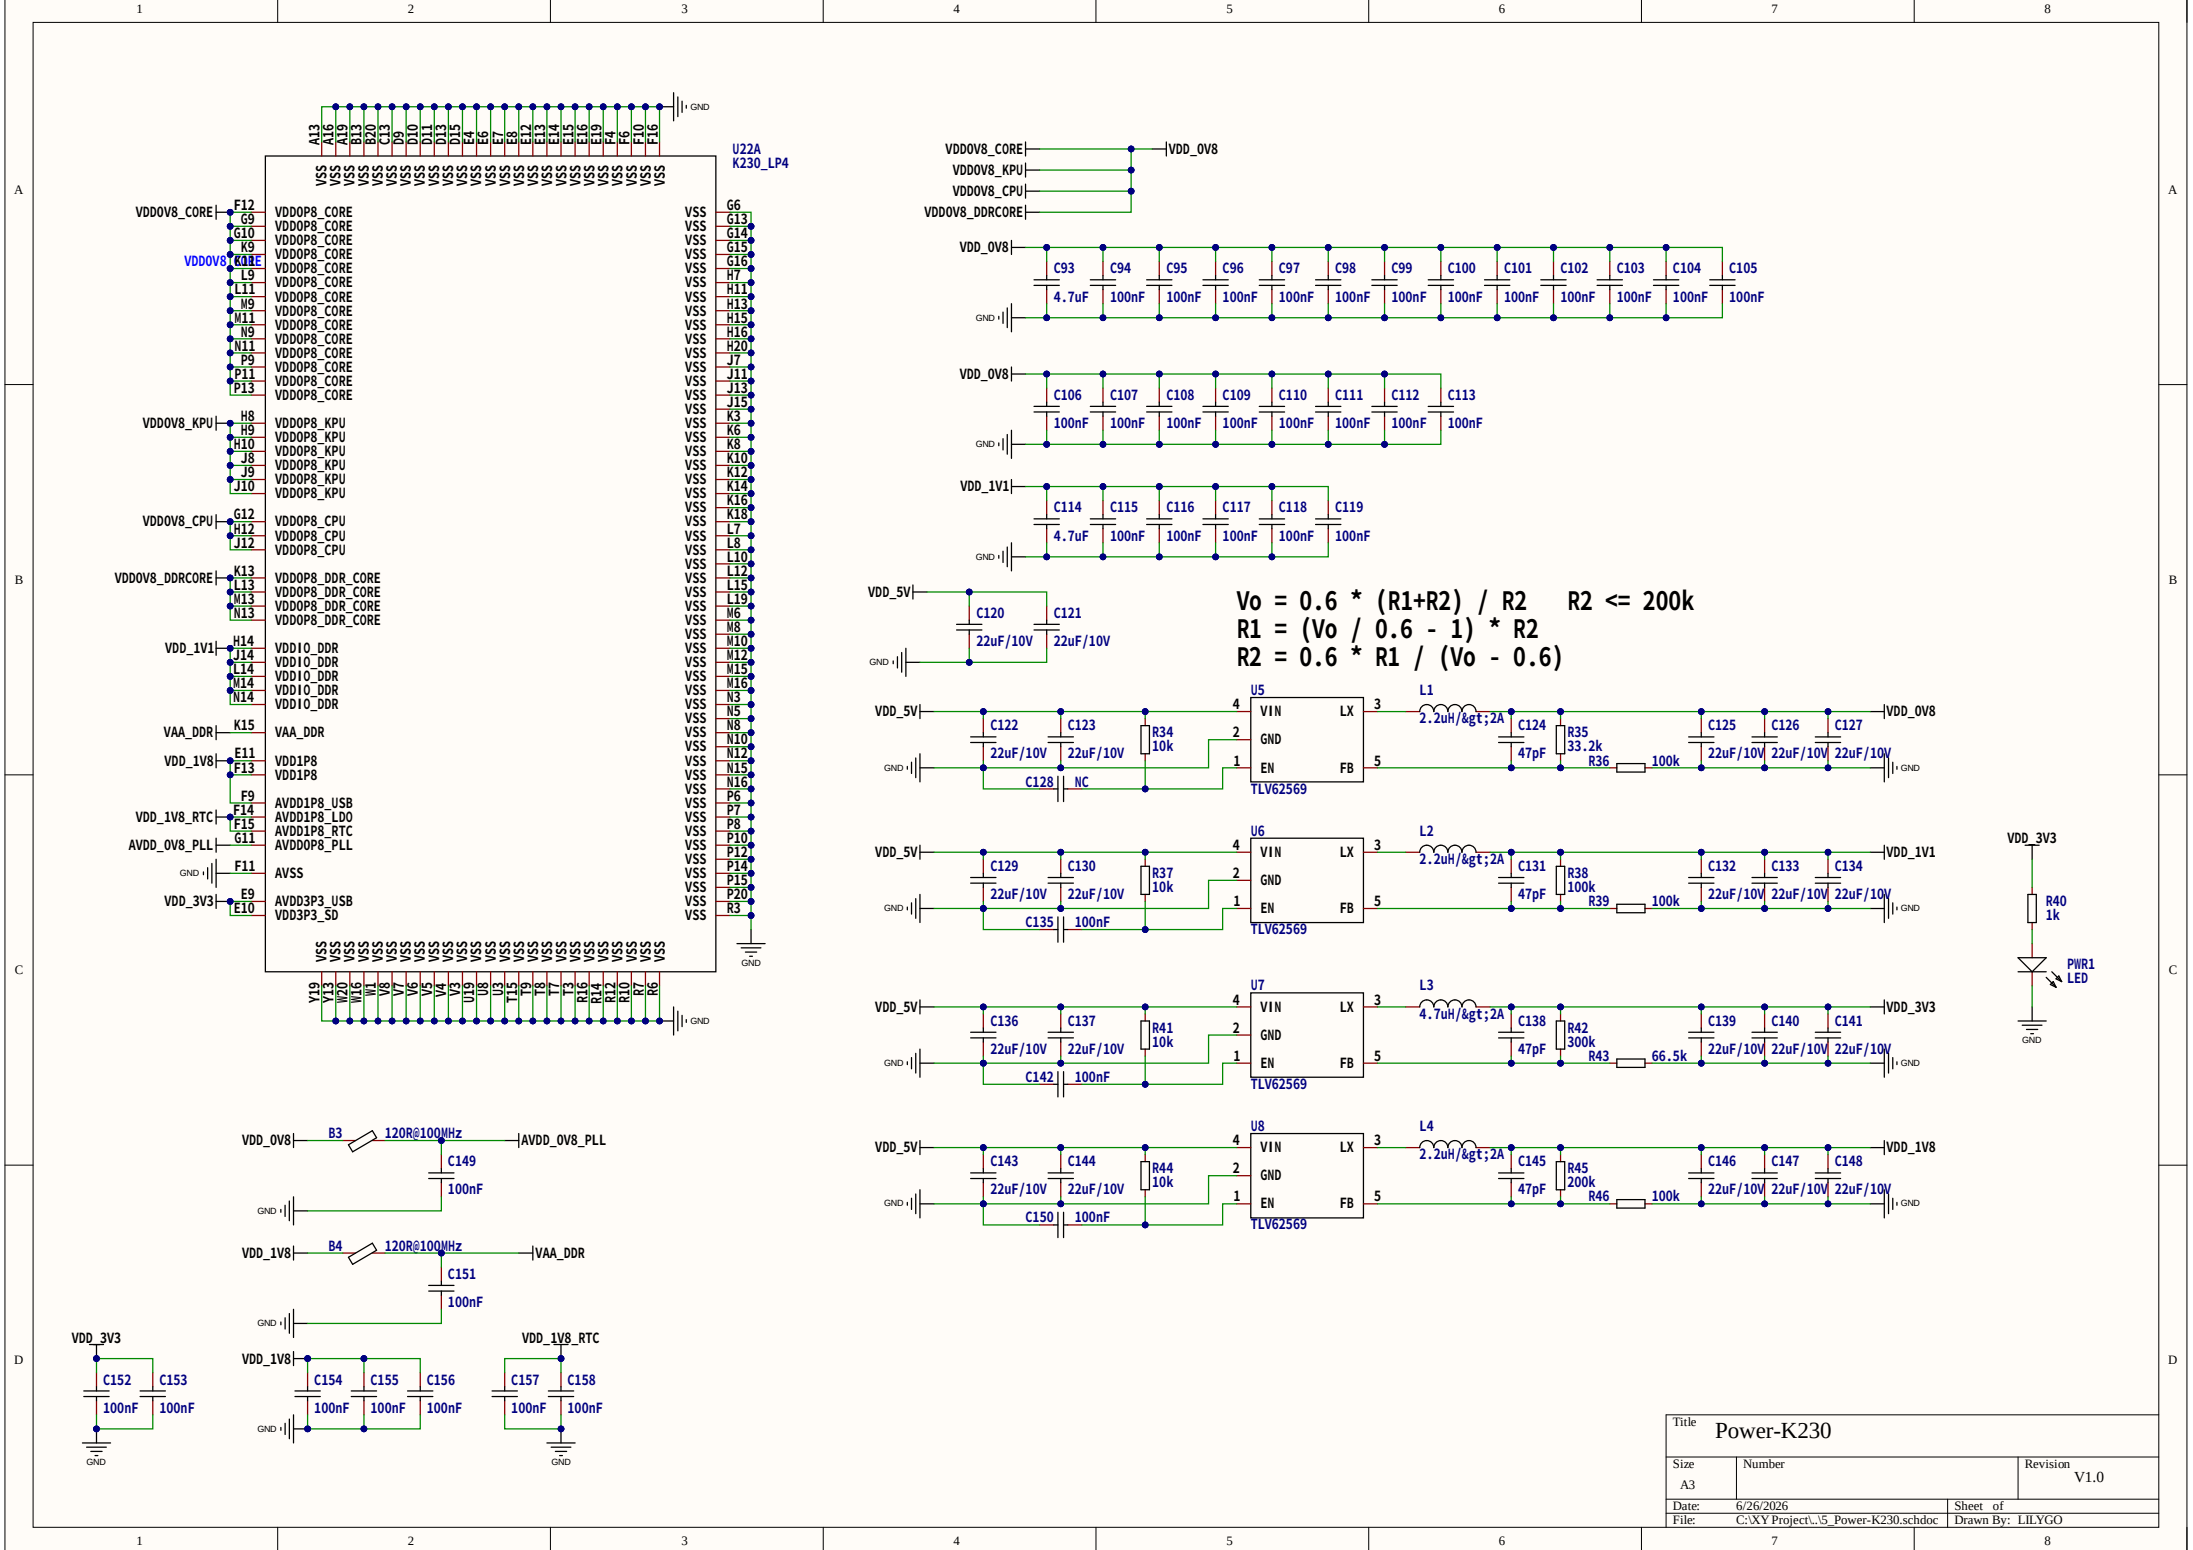


$$V_o = 0.6 * (R1+R2) / R2 \quad R2 \leq 200k$$
$$R1 = (V_o / 0.6 - 1) * R2$$
$$R2 = 0.6 * R1 / (V_o - 0.6)$$

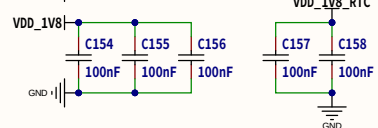

Title			Power-K230
Size	Number	Revision	
A3		V1.0	
Date:	6/26/2026	Sheet of	
File:	C:\XY Project\..5_Power-K230.schdoc	Drawn By:	LILYGO

HDMI

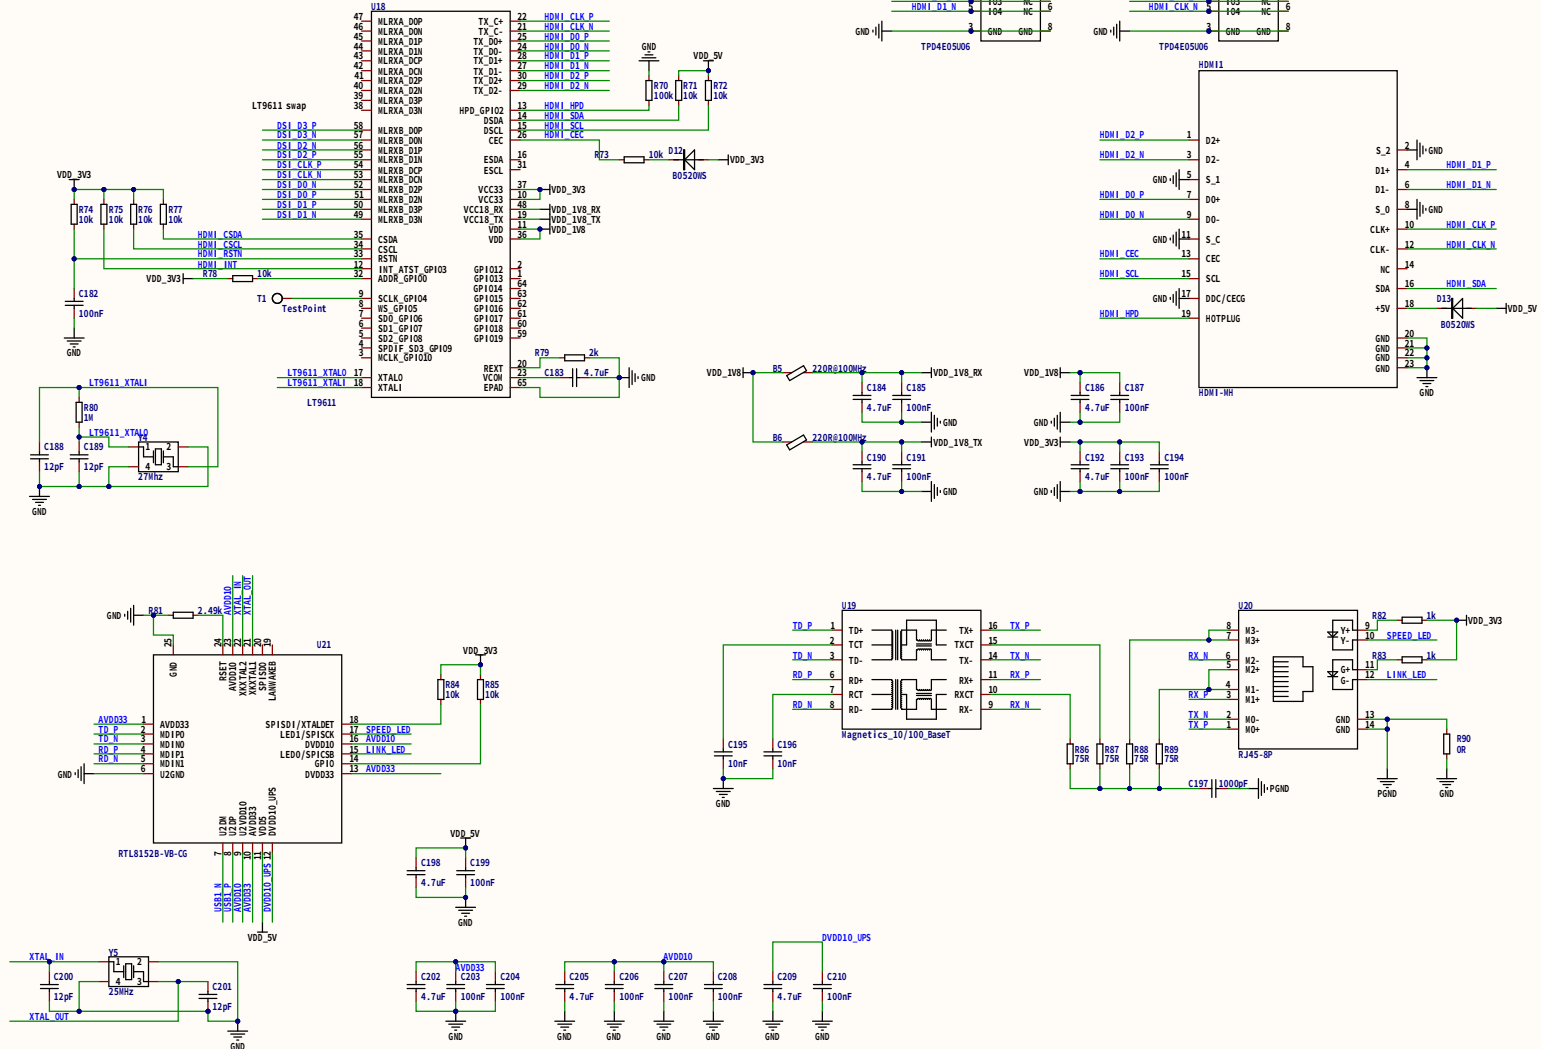

Title			
HDMI+ETH			
Size	Number	Revision	
A2		V1.0	
Date	06/06/2016	Sheet of	
File	C:\X\Project_17_HDMI+ETH.schdoc	Drawn By: LILYGO	

