


GAIN_SLOT	I²S/LJ GAIN (dB)
Connect to GND through 100kΩ ±5% resistor	15
Connect to GND	12
Unconnected	9
Connect to V _{DD}	6
Connect to V _{DD} through 100kΩ ±5% resistor	3

The gain mode can be changed according to the table above

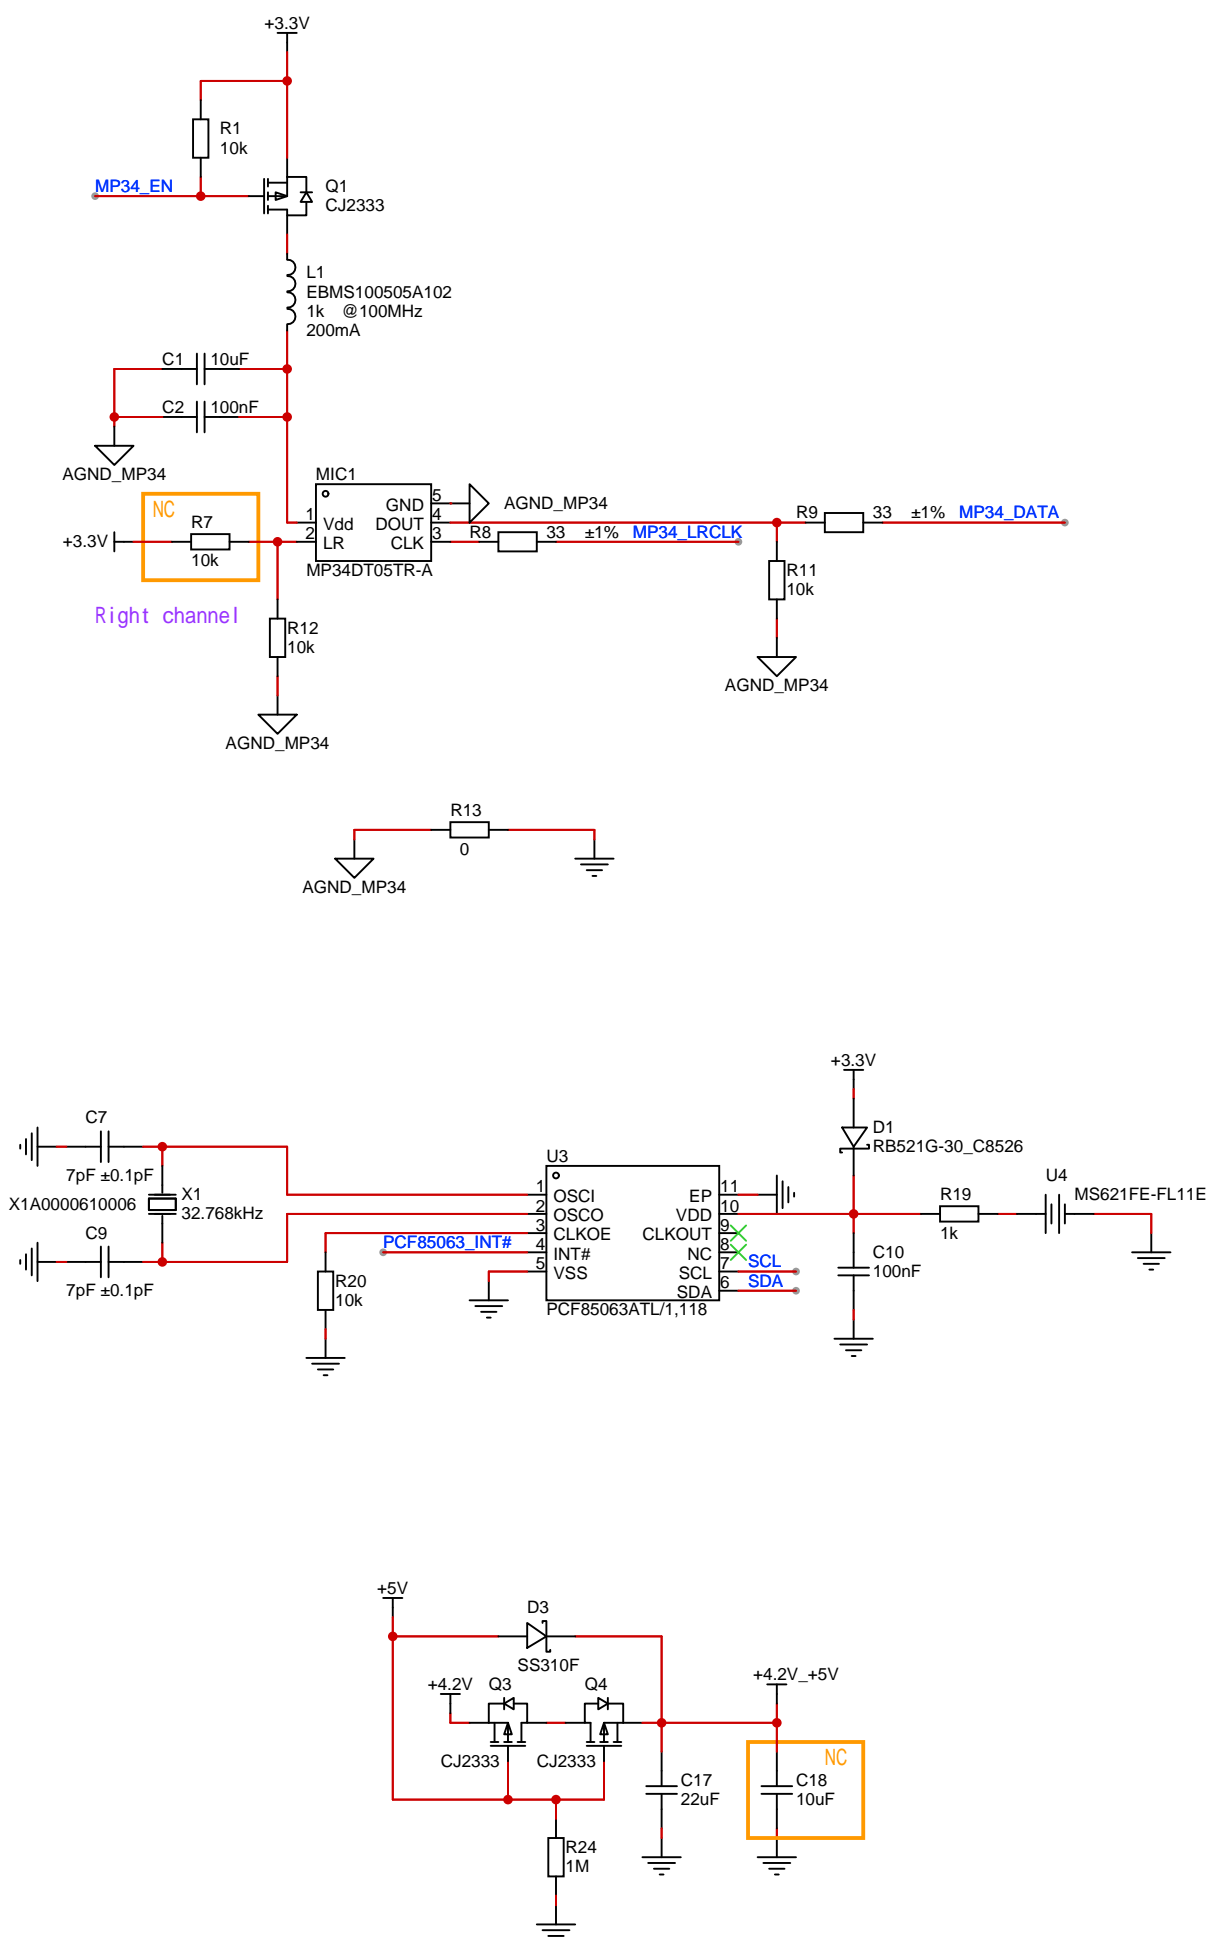

Title: T-Display-S3-Pro-MVSRBoard		Ver: V1.1
	Company: LILYGO	License: GPL 3.0
	Data: 2024-09-13 LastEditTime: 2025-02-05	