

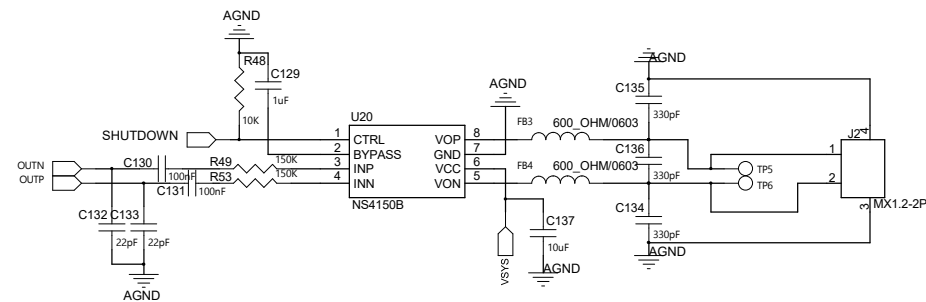
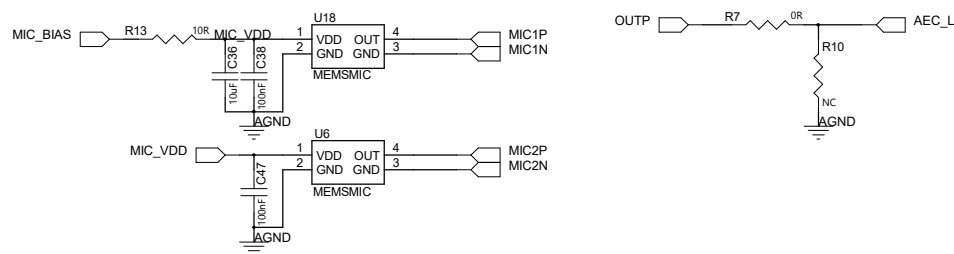
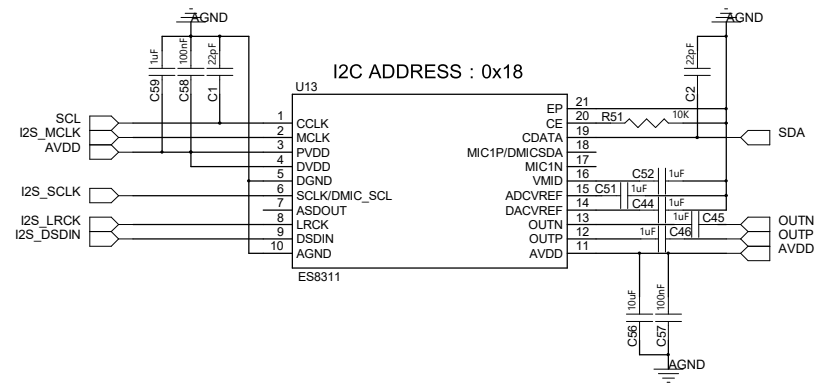
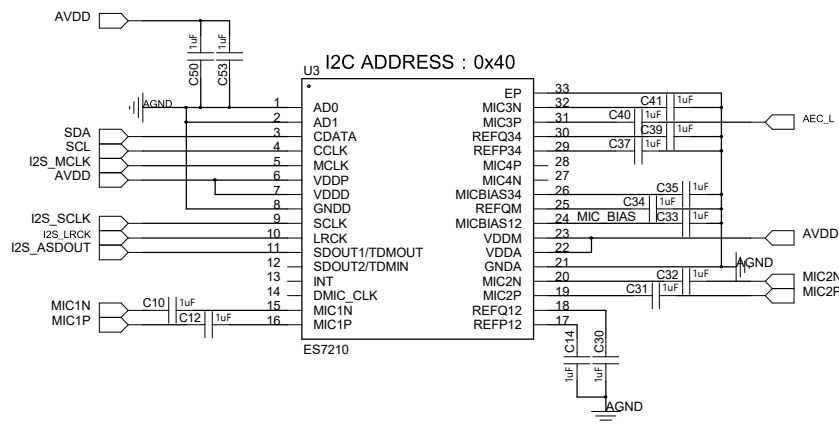
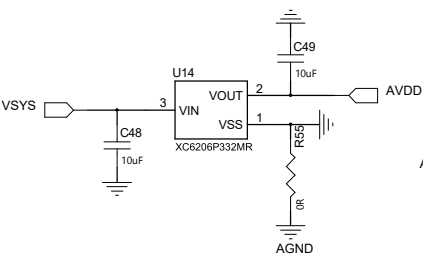
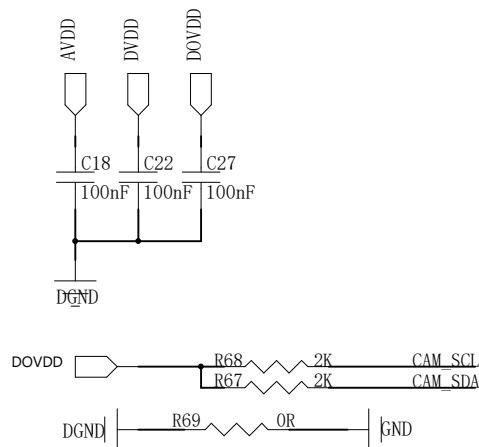
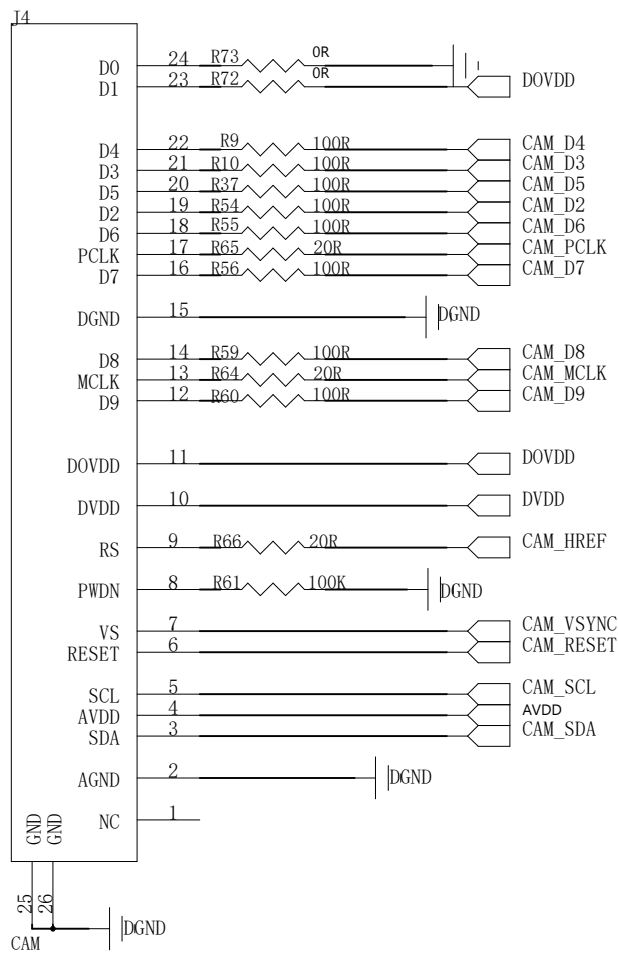
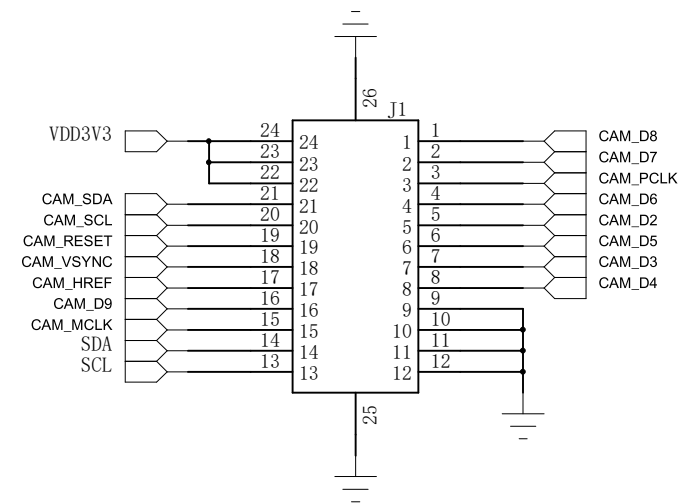
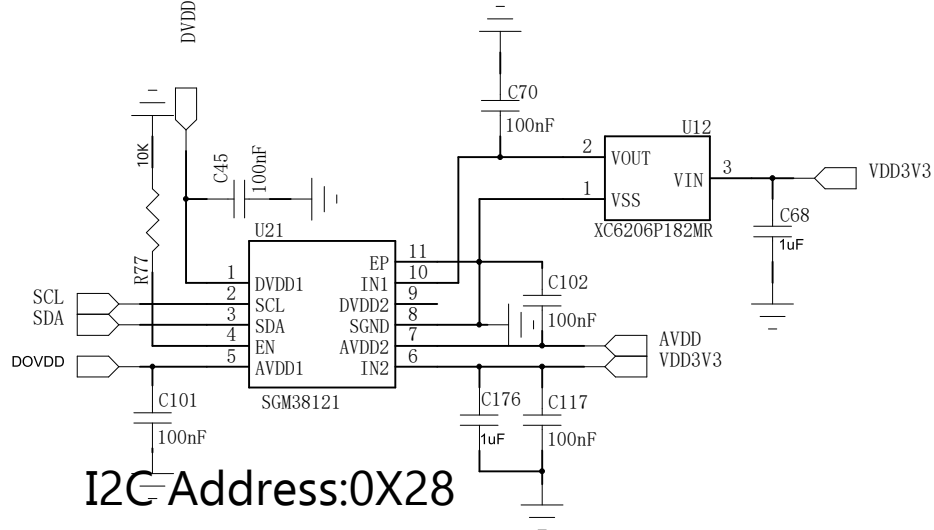







SCL-----IO2
SDA-----IO3
I2S_MCLK-----IO39
I2S_SCLK-----IO40
I2S_ASOUT-----IO41
I2S_LRCK-----IO42
I2S_DSDIN-----IO45

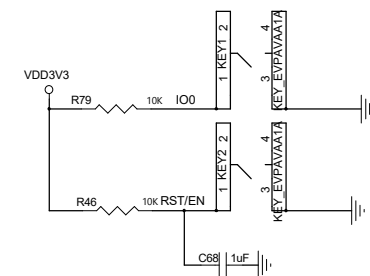

The values of C1 and C4 vary with the selection of the crystal.

The value of R_4 varies with the actual PCB board. The initial value could be 24 nH.

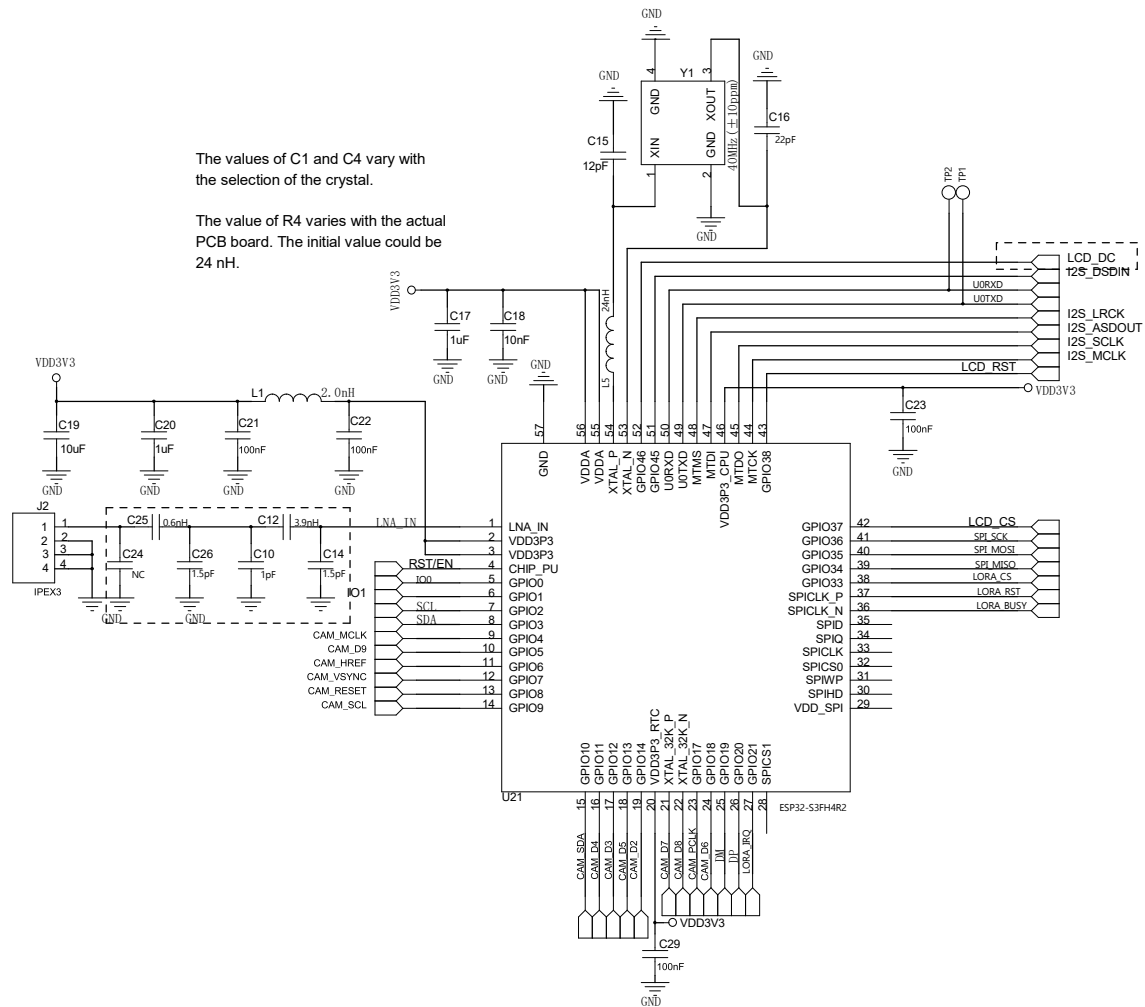

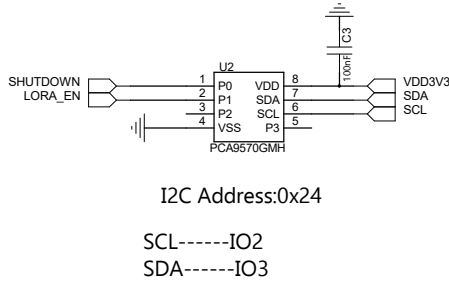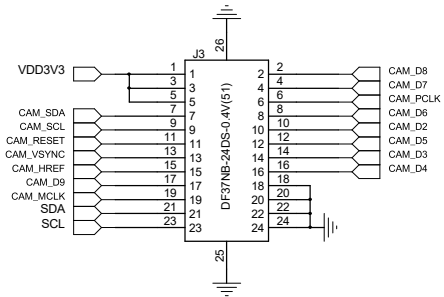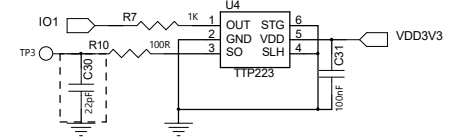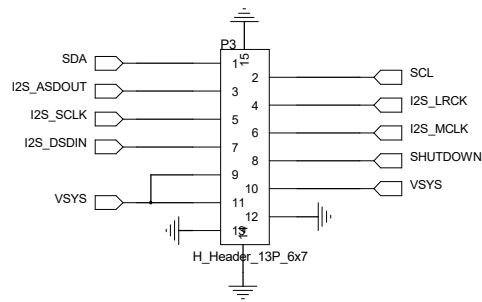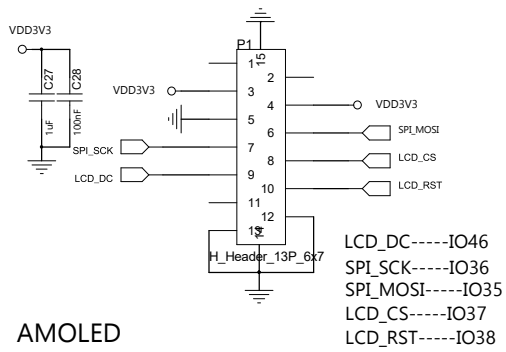

I2C Address:0x28

CAM_MCLK-----IO4

CAM_D9-----IO5

CAM_HREF-----IO6

CAM_VSYNC-----IO7

CAM_RESET-----IO8

CAM_SCL-----IO9

CAM_SDA-----IO10

CAM_D4-----IO11

CAM_D3-----IO12

CAM_D5-----IO13


CAM_D2-----IO14

CAM_D7-----IO15

CAM_D8-----IO16

CAM_PCLK-----IO17

CAM_D6-----IO18

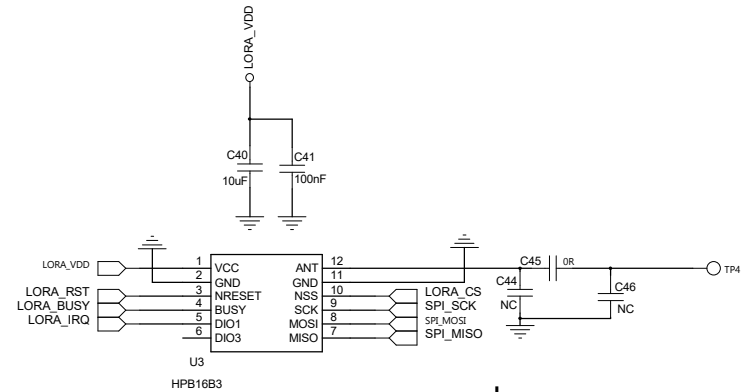

Lora

LORA_CS-----IO33

LORA_RST-----IO47

LORA_BUSY-----IO48

LORA_IRQ-----IO21

LORA_SCK-----IO36

LORA_MOSI-----IO35

LORA_MISO-----IO34