

T-Impulse-Plus_V2.0 Power Consumption Test Log

Date: 20250825
LastEditTime: 20250825
Test board: T-Impulse-Plus_V2.0 (2025-6-18)
Software name: original_test.ino
Testing organization: LILYGO Laboratory

1. Test Environment Description



1.1 测试环境
1.1 Test environment

Test Tools	Sampling speed	Test Methodology	Input voltage	Test environment temperature
BLU939	100000 times/s	Battery Interface Measurement	+4.0V	25°C/77°F

1.2 测试的器件型号
1.2 Test device model

Test device	MCU	Screen	GPS	Lora	Flash	IMU	Power
Corresponding model	nRF52840	oled(ssd1306)	MIA-M10Q	S68F(SX1262)	ZD25WQ32CEIGR	ICM20948	SGM41562

2. Test Physical Object Image

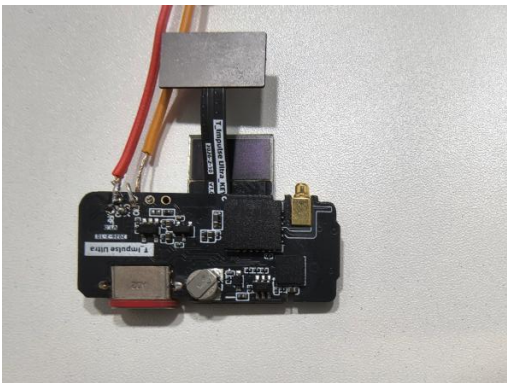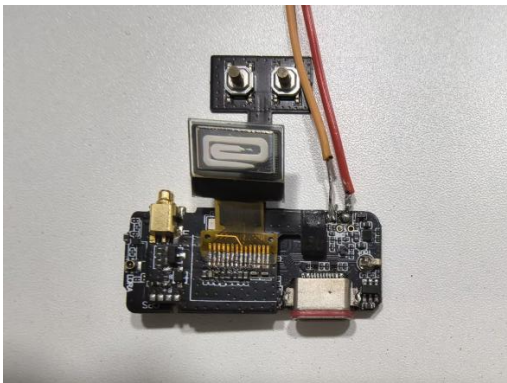

3. Power consumption testing

3.1 总电流变化测试图如下
3.1The test chart depicting the variation of total current is as follows.



3.2Current Test Status Diagram:

MCU	Power	GPS	Screen	Lora	Flash	IMU
System ON Light Sleep	ON	OFF	OFF	OFF	Sleep	OFF

Test result: average 12.76 μ A



3.3Current Test Status Diagram:

MCU	Power	GPS	Screen	Lora	Flash	IMU
System OFF	ON	OFF	OFF	OFF	OFF	OFF

Test result: average 6 μ A

