


REV	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGNED
A2		1 A2 - 4 A2	增加大PIN位 COVRE长度，改善翻盖手感	11/11'30	LUKE
A3		1 A3 - 4 A3	修正图面尺寸	02/27'19	A.P

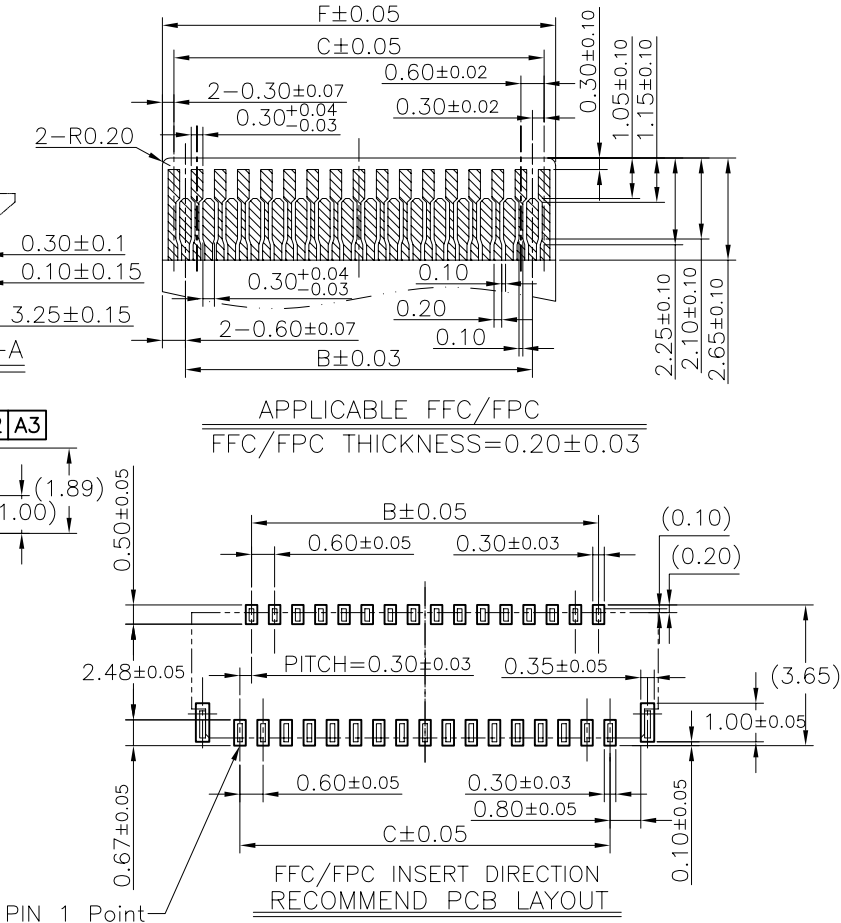

- NOTES:
- MATERIAL:
HOUSING: HIGHT-TEMP PLASTIC,UL 94V-0,COLOR:NATURE;
COVER: HIGHT-TEMP PLASTIC,UL 94V-0,COLOR:BLACK;
TERMINAL: COPPER ALLOY;
PEG: ALLOY;
 - PLATING:
TERMINAL: GOLD PLATED ON NICKEL OVERALL.
PEG: TIN PLATED ON NICKEL OVERALL.
 - RATING:
CURRENT RATING: 0.3A AC/DC
VOLTAGE RATING: 30V AC/DC
TEMPERATURE RANGE: -55°C~+85°C;
 - PART NO.(P/N.):

CFPC 03 09-**-**RL-T* G

G=Gold flash
TA: Tape Rell Packing
TU: Tube Packing
Right Angle/Lower Contact Type
NO. of contacts
Series name
Pitch=0.3mm
FPC Series

TOL				TOL			
±--				±2°			
±0.15				±--			
±0.05				±--			

DRWN: LUKE				PART NO.:			
CHKD:				TITLE: CFPC0309-**-**RL-TAG			
APPD:				DRAWING NO.:			
1/3	⊕	UNIT mm	SCALE N/A	SIZE A4	REV A3		



深圳市锐林鑫电子有限公司

	1	2	3	4	5	6	7	8	9	0	
A	<div>HSF COMPLIANT</div>										A
B											B
C	PIN NO.(N)	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	NOTES			
	09	4.90	1.80	2.40	3.03	4.35	3.00				
	11	5.50	2.40	3.00	3.63	4.95	3.60				
	13	6.10	3.00	3.60	4.23	5.55	4.20				
	15	6.70	3.60	4.20	4.83	6.15	4.80				
D	17	7.30	4.20	4.80	5.43	6.75	5.40				
	19	7.90	4.80	5.40	6.03	7.35	6.00				
	21	8.50	5.40	6.00	6.63	7.95	6.60				
	23	9.10	6.00	6.60	7.23	8.55	7.20				
	25	9.70	6.60	7.20	7.83	9.15	7.80				
E	27	10.30	7.20	7.80	8.43	9.75	8.40				
	29	10.90	7.80	8.40	9.03	10.35	9.00				
	31	11.50	8.40	9.00	9.63	10.95	9.60				
	33	12.10	9.00	9.60	10.23	11.55	10.20				
	35	12.70	9.60	10.20	10.83	12.15	10.80				
F	37	13.30	10.20	10.80	11.43	12.75	11.40				
	39	13.90	10.80	11.40	12.03	13.35	12.00				
	41	14.50	11.40	12.00	12.63	13.95	12.60				
	43	15.10	12.00	12.60	13.23	14.55	13.20				
	45	15.70	12.60	13.20	13.83	15.15	13.80				
G	47	16.30	13.20	13.80	14.43	15.75	14.40				
	49	16.90	13.80	14.40	15.03	16.35	15.00				
	51	17.50	14.40	15.00	15.63	16.95	15.60				
	53	18.10	15.00	15.60	16.23	17.55	16.20				
	55	18.70	15.60	16.20	16.83	18.15	16.80				
H	57	19.30	16.20	16.80	17.43	18.75	17.40				
	59	19.90	16.80	17.40	18.03	19.35	18.00				
	61	20.50	17.40	18.00	18.63	19.95	18.60				
	63	21.10	18.00	18.60	19.23	20.55	19.20				
	65	21.70	18.60	19.20	19.83	21.15	19.80				
J	67	22.30	19.20	19.80	20.43	21.75	20.40				
	69	22.90	19.80	20.40	21.03	22.35	21.00				
	71	23.50	20.40	21.00	21.63	22.95	21.60				
	1	2	3	4	5	6	7	8	9	0	




DIM	TOL	DEC	TOL
X.	±--	X.*	±2*
X.X	±0.25	X.X*	±2*
X.XX	±0.15	X.XX*	±--
X.XXX		X.XXX*	±--

		深圳市锐林鑫电子有限公司			
		DRWN: LUKE		PART NO.:	
		CHKD:		TITLE:	
		APPD:		DRAWING NO.:	
SHEET: 2/3		UNIT mm	SCALE N/A	SIZE A4	REV A3

HSF COMPLIANT

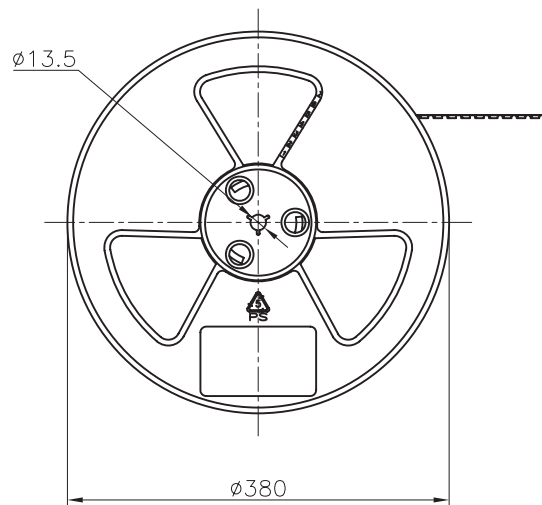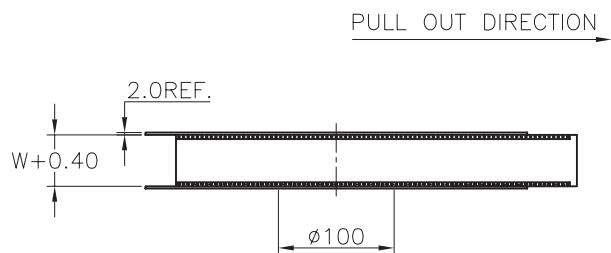


SCALE 3:20

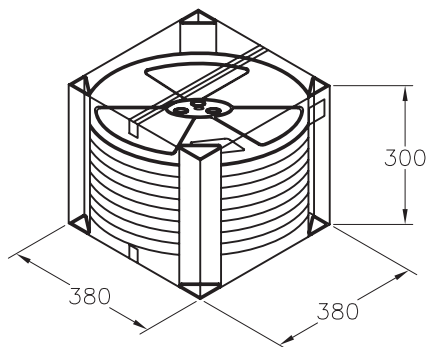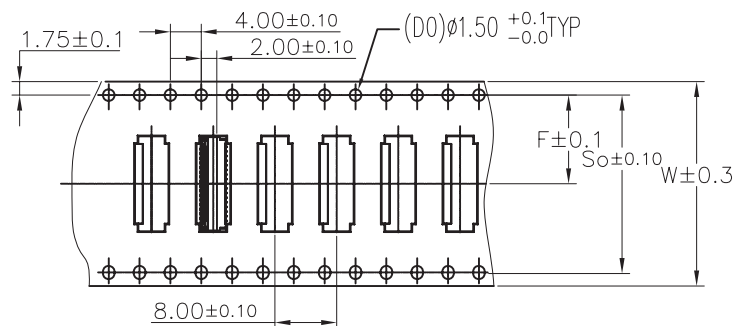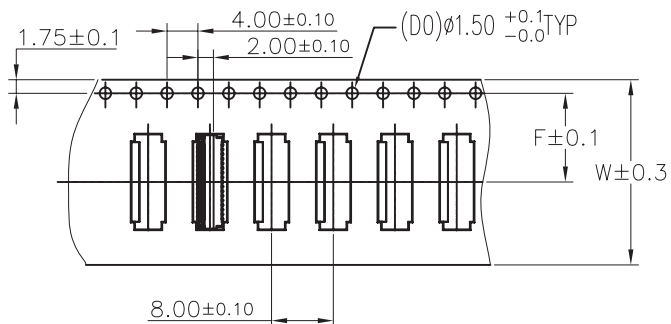

NOTES:

1. ALL DIMENSION MEET EIA-481-3 REQUIREMENTS;
2. CARRRIER MATERIAL: PS, BLACK;
3. PACKING QULITY: 5000PCS/REEL;

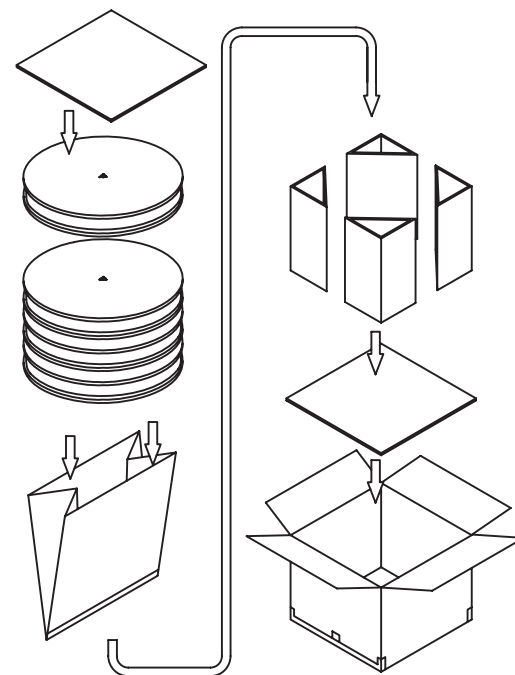

PACKING DISCRPTION:

PIN No.	09~39	41~51	53~71				
REEL WIDTH	24.4	32.4	44.4				
PCS/REEL	5000	5000	5000	PIN NO.	DIM W	DIM F	DIM So
REEL/BOX	9	7	6	13~39	24.0	11.50±0.10	--
BOX/PCS	45K	35K	30K	41~51	32.0	14.20±0.10	28.4
CTN. SIZE	400*400*300			53~71	44.0	20.20±0.15	40.4

DIM	TOL	DEC	TOL
X.	±--	X.*	±2*
X.X	±0.25	X.X*	±2*
X.XX	±0.15	X.XX*	±--
X.XXX	±0.10	X.XXX*	±--

深圳市锐林鑫电子有限公司

DRWN: LUKE		PART NO.:			
CHKD:		TITLE:			
APPD:		DRAWING NO.:			
SHEET: 3/3		UNIT mm	SCALE N/A	SIZE A4	REV A3