

T-QT-C6_V1.2 Power Consumption Test Log

Date: 20241122
LastEditTime: 20241122
Test board: T-QT-C6_V1.2 (Engineering Prototype)(202405231700)
Testing organization: LILYGO Laboratory

1. Test Environment Description

1.1 测试环境
1.1 Test environment

Test Tools	Sampling speed	Test Methodology	Input voltage	Test environment temperature
BLU939	100000 times/s	Battery Interface Measurement	+4.0V	25°C/77°F



1.2 测试的器件型号
1.2 Test device model

Test device	Power 3.3V	Screen	Touch	Charging chip	IMU
Corresponding model	RT9080	N085-1212TBWIG06-C08	CST816T	SGM41562XG/TR	LSM6DSL

2. Modification Instructions


NULL

3. Test Physical Object Image

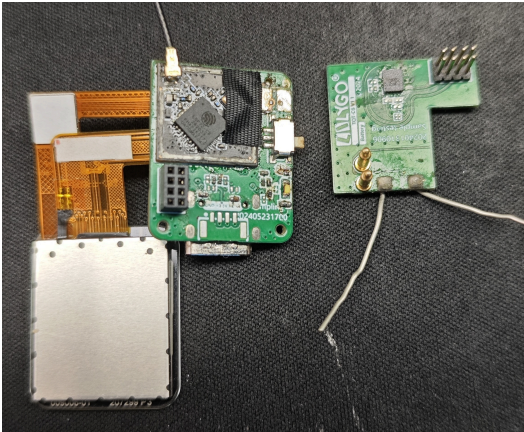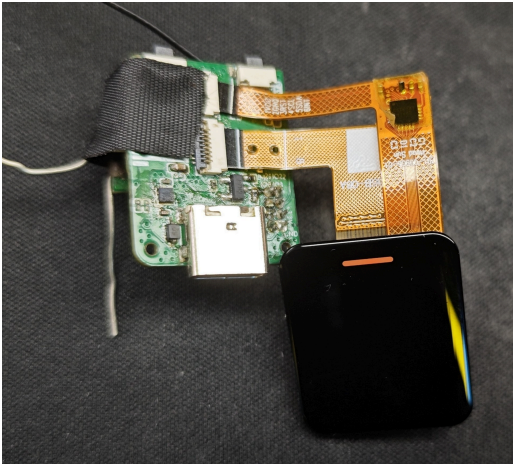

4. Program: Deep_Sleep.ino Power Consumption Test


- 4.1 总电流变化测试图如下
4.1 The test chart depicting the variation of total current is as follows.

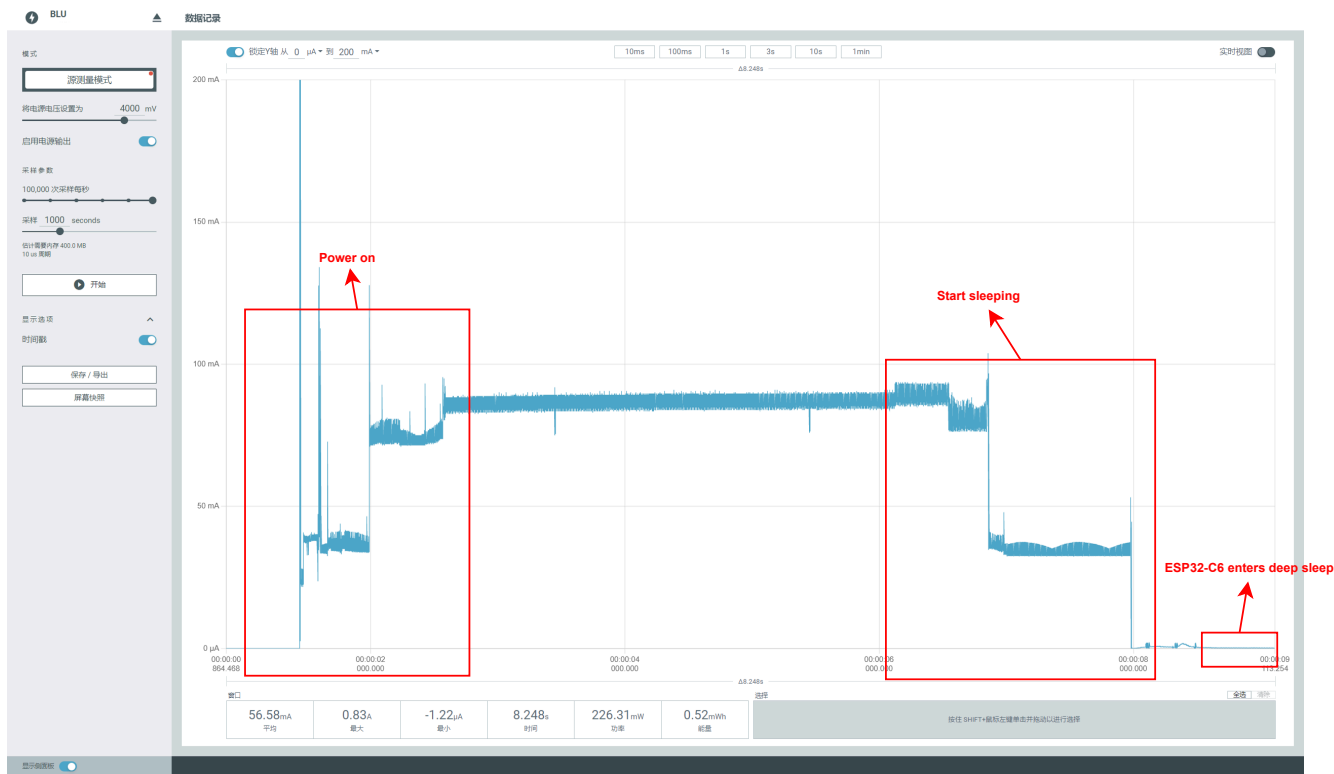

4.2 Current Test Status Diagram:


ESP32-C6	Power 3.3V	Screen	Touch	Charging chip	IMU
Deep Sleep	ON	Sleep	Sleep	ON	Sleep

Test result: average 172.61 μ A

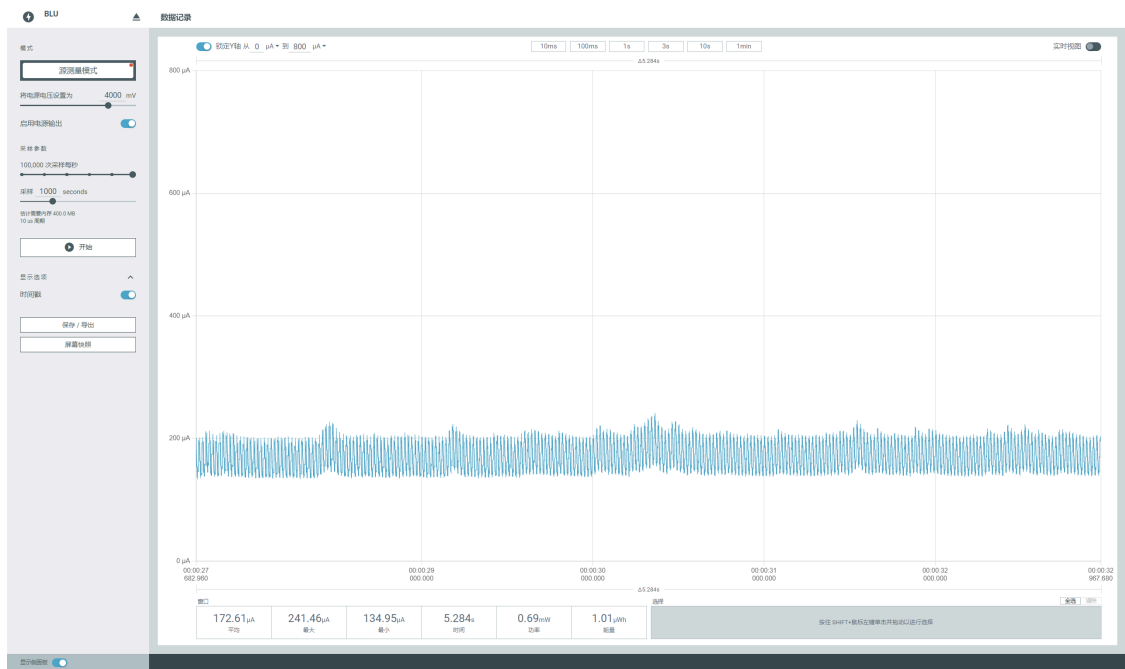

5. Program: Light_Sleep.ino Power Consumption Test

5.1 总电流变化测试图如下
5.1 The test chart depicting the variation of total current is as follows.

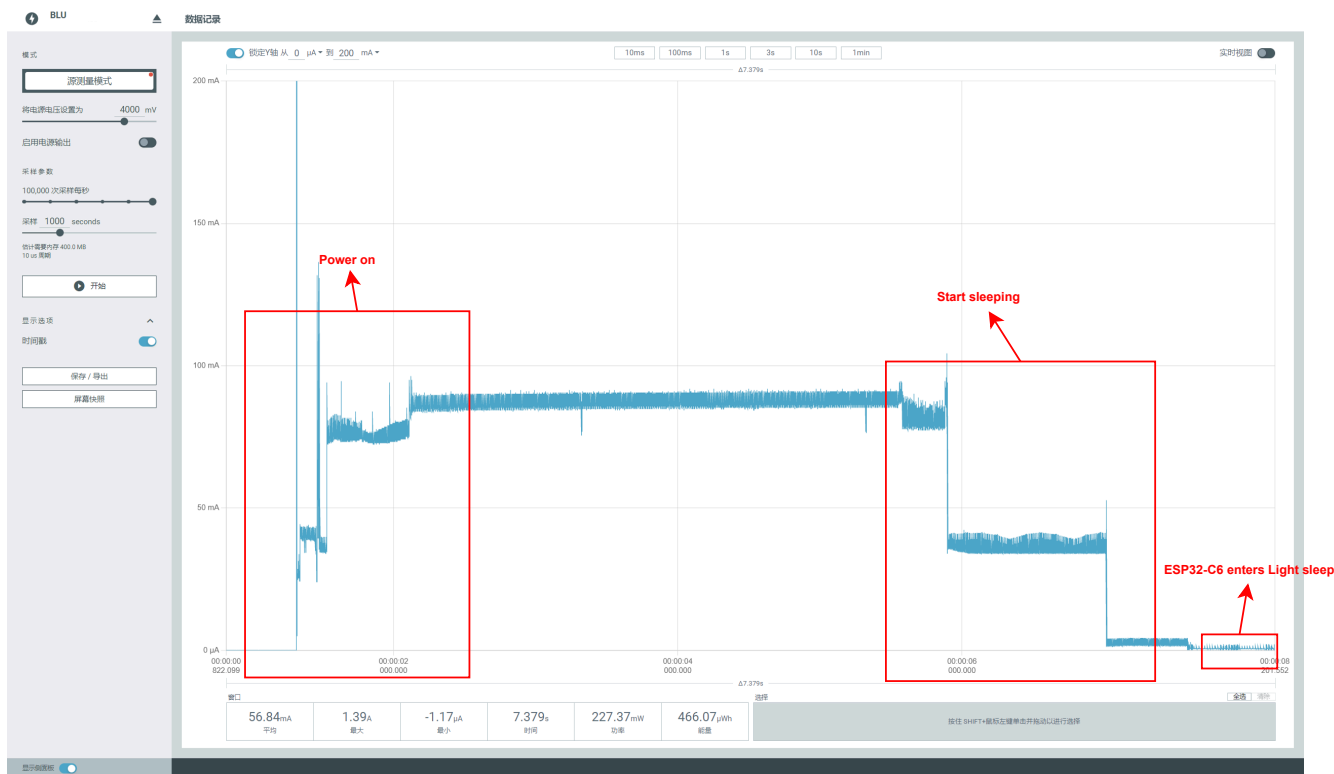

5.2 Current Test Status Diagram:

ESP32-C6	Power 3.3V	Screen	Touch	Charging chip	IMU
Light Sleep	ON	Sleep	Sleep	ON	Sleep

Test result: average 516.81 μA

