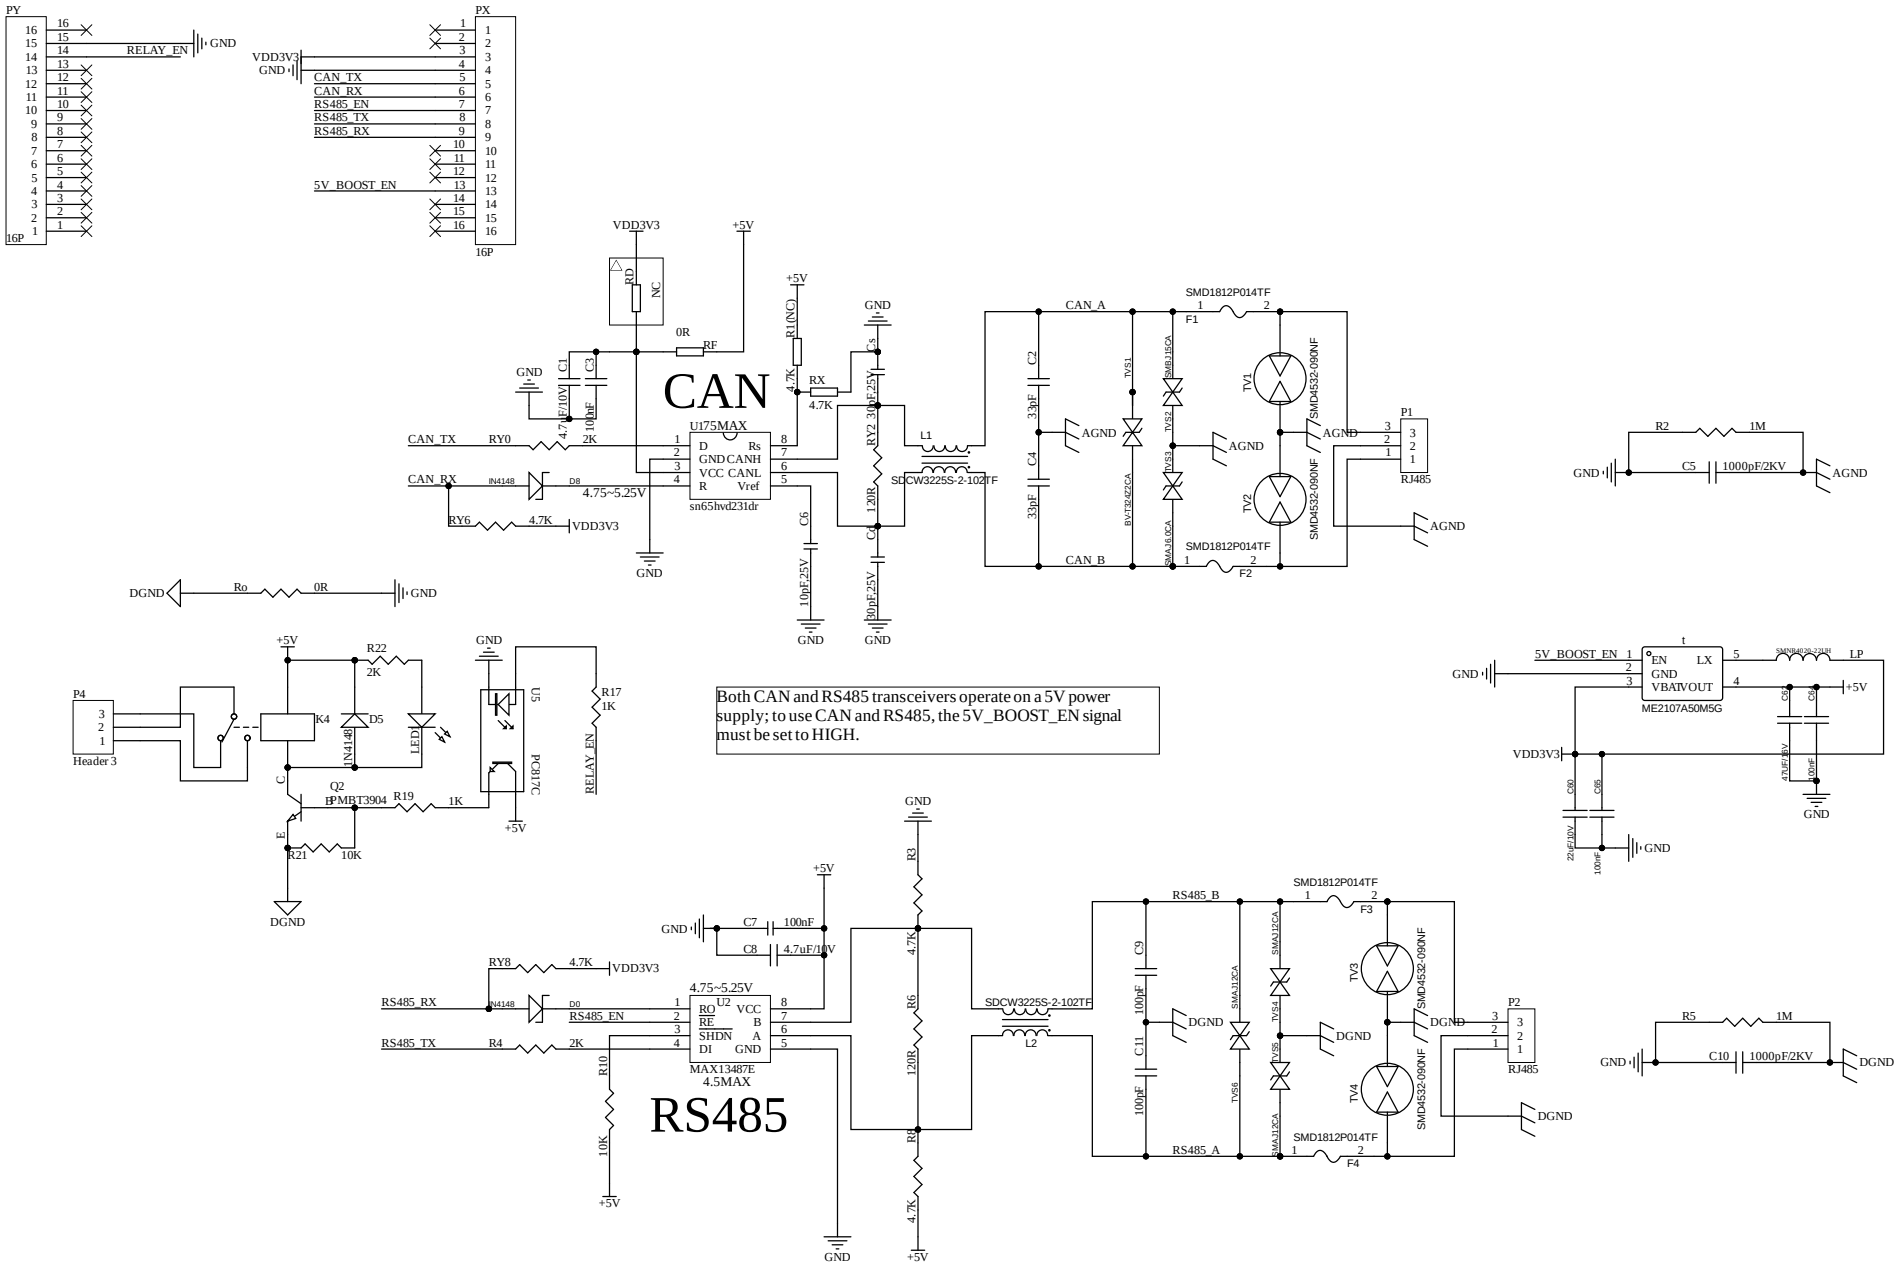

PY
PX
16P
RELAY_EN
GND
VDD3V3
CAN_TX
CAN_RX
RS485_EN
RS485_TX
RS485_RX
5V_BOOST_EN
CAN
U175MAX
sn65hvd231dr
SDCW3225S-2-102TF
SMD1812P014TF
SMD4532-090NF
RJ485
4.75~5.25V
RS485
MAX13487E
4.5MAX
Both CAN and RS485 transceivers operate on a 5V power supply; to use CAN and RS485, the 5V_BOOST_EN signal must be set to HIGH.
ME2107A50M5G
Header 3
PMBT3904
PC817C
IN4148