




A

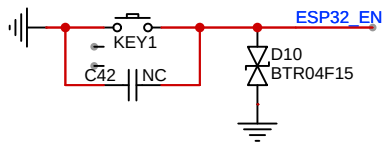

B




C

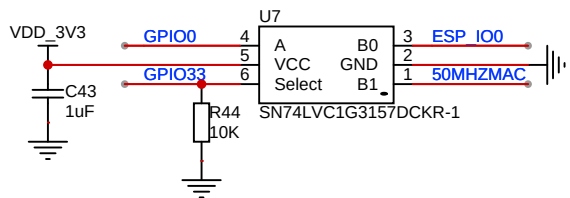


Select Input :
L B0 to A
H B1 to A

D



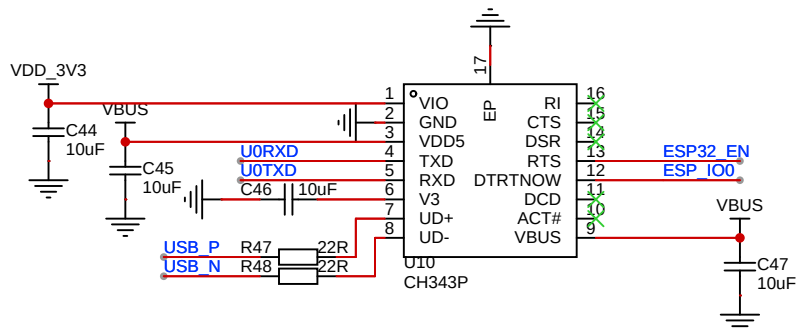


Input-only pins without output drivers or built-in pull-up/pull-down circuits.


SENSOR_VP (GP1036)
SEN-SOR_CAPP (GP1037)
SENSOR_CAPN (GP1038)
SENSOR_VN (GP1039)
VDET_1 (GP1034)
VDET_2 (GP1035)





Strapping Pin
• MTD1 (GP1012)
• GP100
• GP102
• MTD0 (GP1015)
• GP105

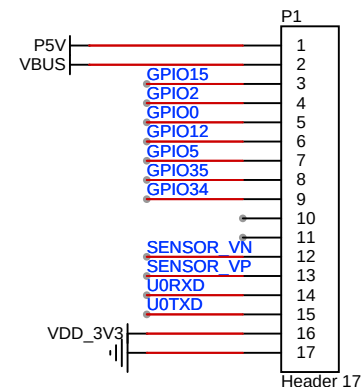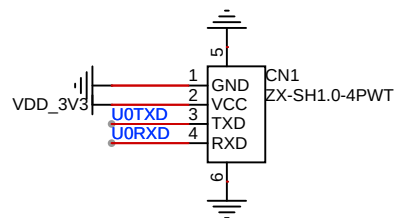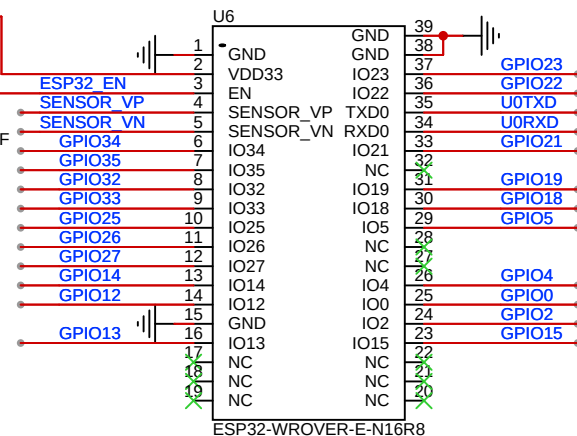

LAN8671 Power

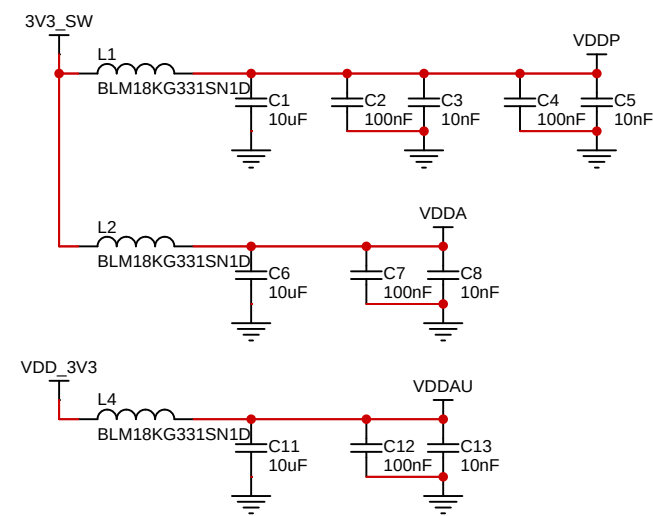


LAN8671

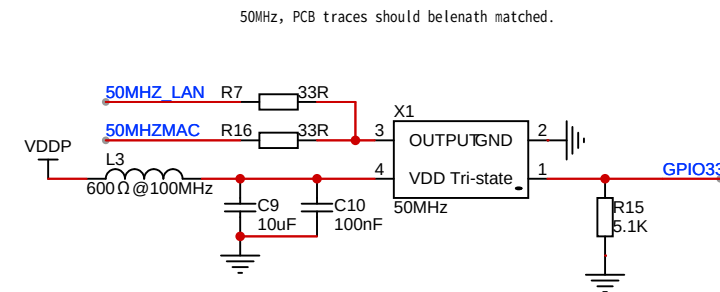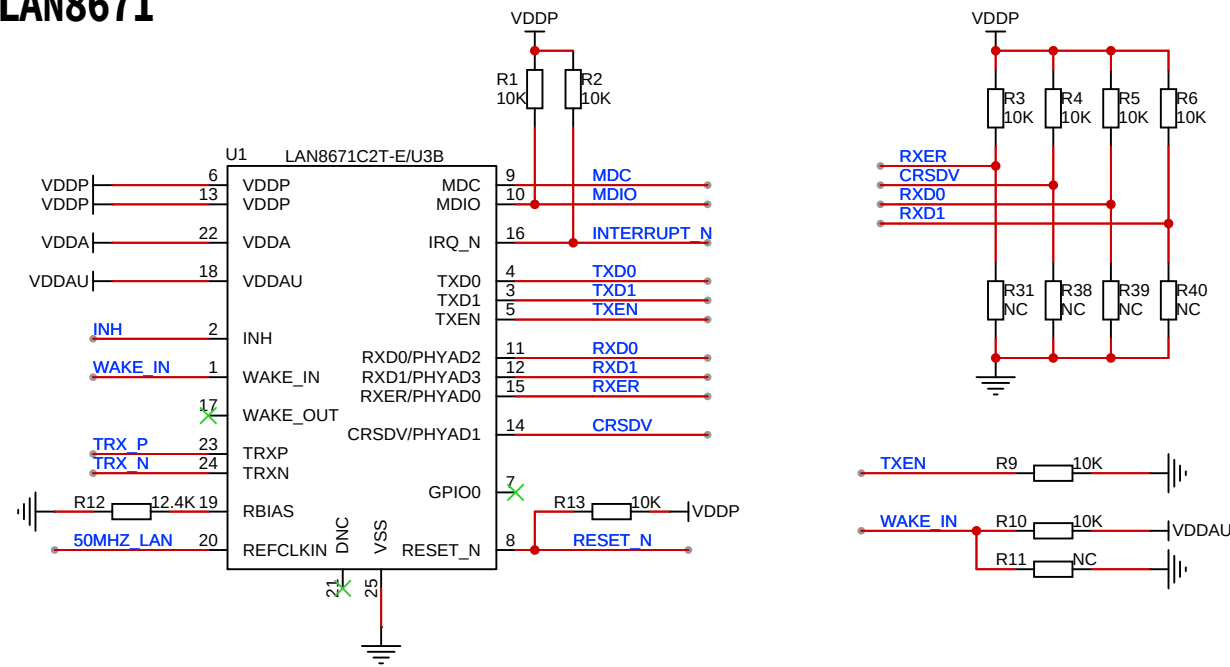


- The RMII includes the following interface signals:
- Transmit Data - TXD[1:0]
 - Transmit Enable - TXEN
 - Receive Data - RXD[1:0]
 - Receive Error - RXER
 - Carrier Sense / Data Valid - CRSDV


Lan Output

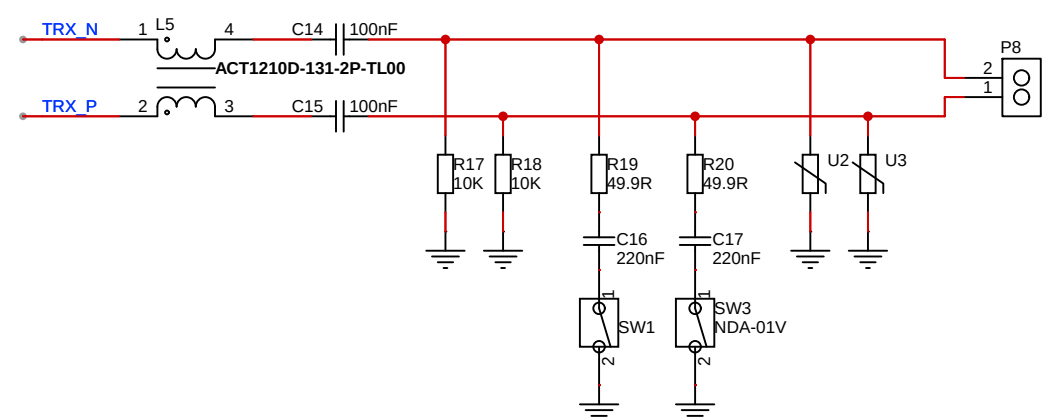


10BASE-T1S terminations close the solder jumpers to insert terminations.




RS485

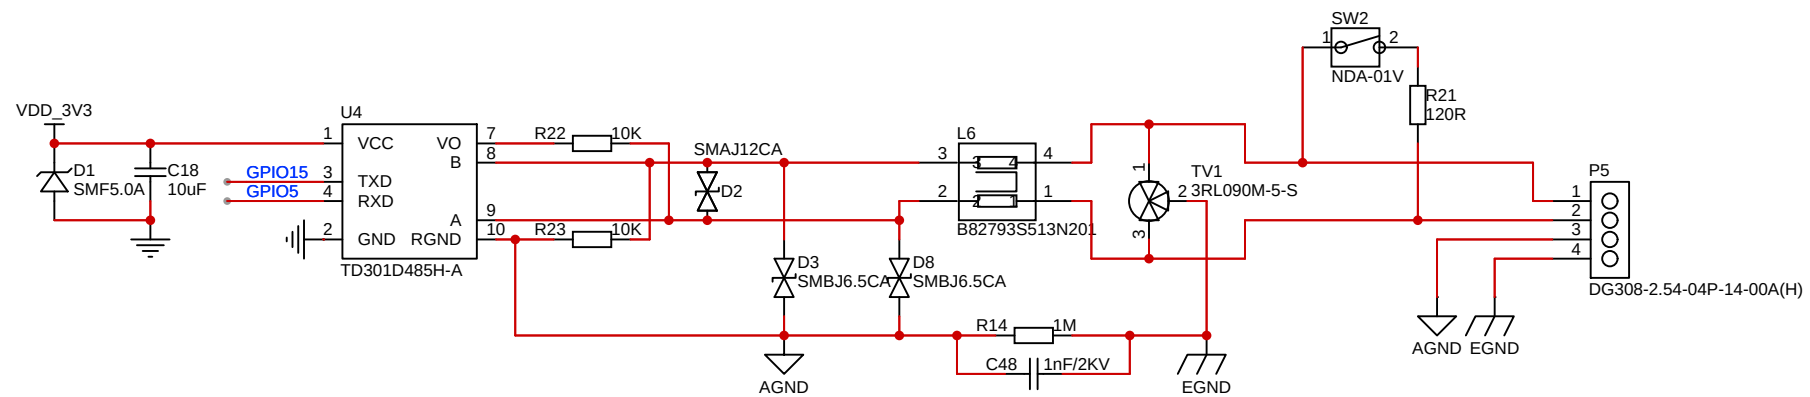


External Power Input: DC 5V~75V



USB IN

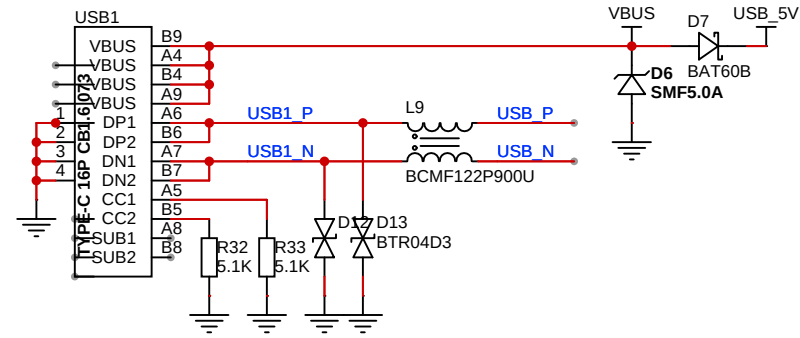


Power Selection

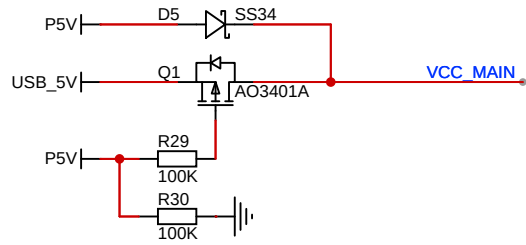


Automatic Power Source Selection, Prefer ouTpowr in


External Input DC down

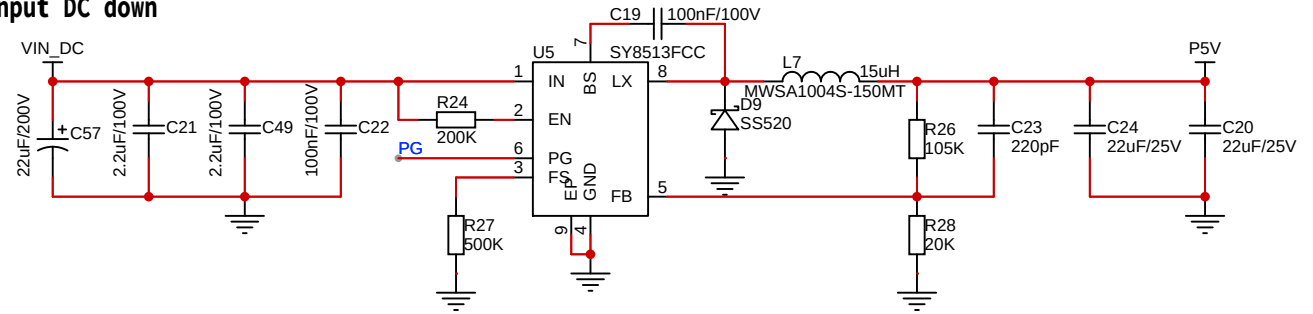

System Power Supply

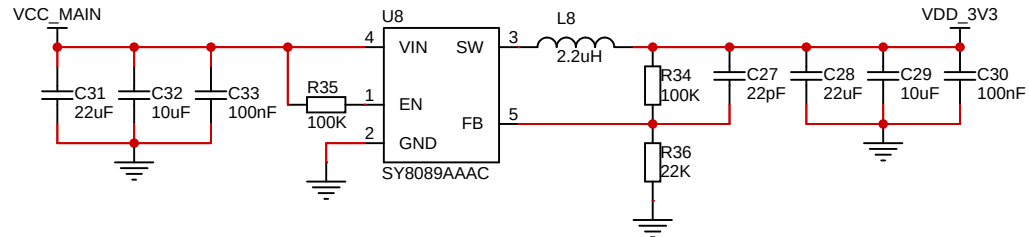

Power Light

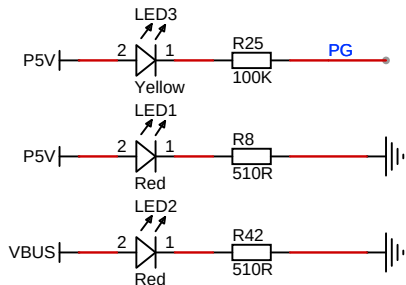

LAN8671 Power

