
16 The iron cylinder of an engine is to be fitted into a piece of aluminium.

The outside diameter *M* of the iron cylinder is slightly larger than the diameter *N* of the hole in the aluminium.

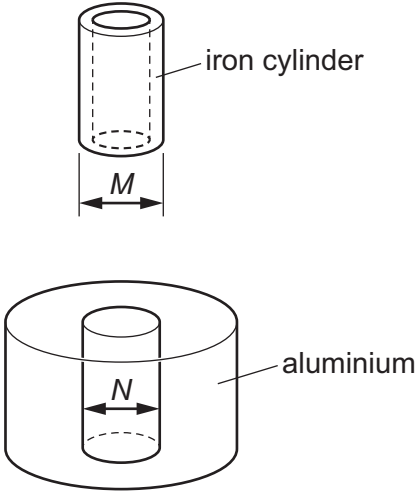

What is the best action to fit the cylinder into the aluminium?

A Cool the aluminium and cool the iron.

B Cool the aluminium and heat the iron.

C Heat the aluminium and cool the iron.

D Heat the aluminium and heat the iron.