
(a) Distributed RF monitoring

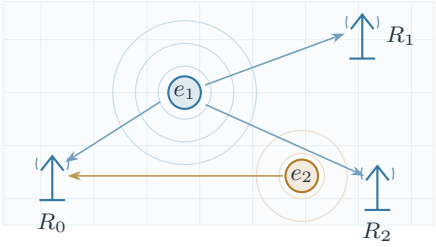

One burst → one event

Delay + bias + noise


Hidden source positions

(b) Heterogeneous report representations

Same carrier; different units and class order

R_0	100 MHz	→ Native class order: $(1, 2, 3, 4)$ $(.75, .10, .10, .05)$
R_1	100000 kHz	→ Native class order: $(2, 3, 4, 1)$ $(.10, .10, .05, .75)$
R_2	10^8 Hz	→ Native class order: $(3, 4, 1, 2)$ $(.10, .05, .75, .10)$

(c) Local links, global receiver conflict

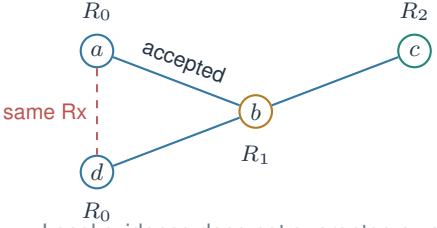


Connected set: $\{a, b, c, d\}$

R_0 occurs twice.

Local evidence does not guarantee a valid partition.

(d) Receiver-exclusive event partition



Singleton retained

Every cluster: distinct receivers + all cross-pair gates

Event count is unknown; emitter identity is outside this task.