
(a) Geometric bound


Unknown source $\mathbf{x}_e$; known receiver baseline

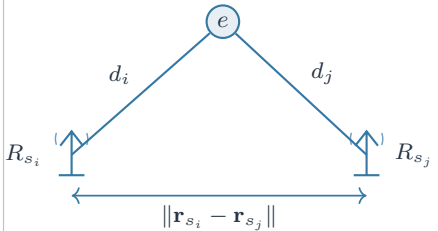

$$|d_i - d_j|/c \leq h_{ij}$$


(b) Declared uncertainty

Noise is not a new path length.
The gate is conditional on declared u_t.

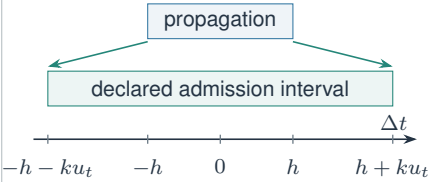

$$z_t = \max(0, |\Delta t| - h)/u_t$$

(c) Joint admission region



$$g_{ij} = \mathbf{1}[z_t \leq k]\,\mathbf{1}[z_f \leq k]$$