2SK2084Ⓛ, 2SK2084Ⓢ

Silicon N Channel MOS FET

Application

High speed power switching

Features

- Low on–resistance
- High speed switching
- Low drive current
- 4 V gate drive device can be driven from 5 V source
- Suitable for Switching regulator, DC – DC converter

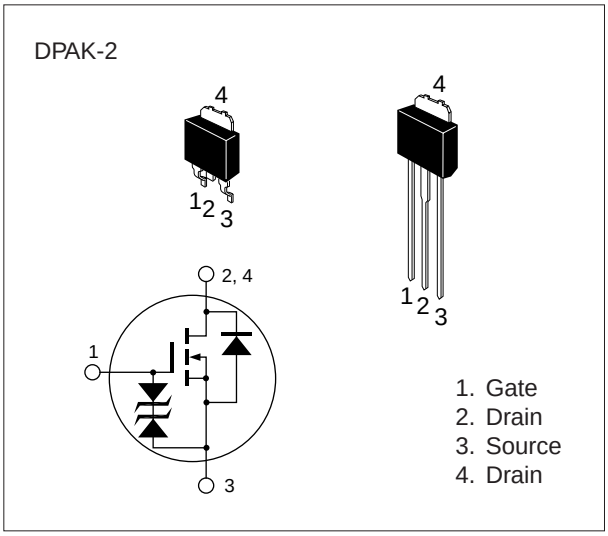

Table 1 Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Ratings	Unit
Drain to source voltage	V_{DSS}	20	V
Gate to source voltage	V_{GSS}	±20	V
Drain current	I_D	7	A
Drain peak current	$I_{D(pulse)}$*	28	A
Body–drain diode reverse drain current	I_{DR}	7	A
Channel dissipation	Pch**	20	W
Channel temperature	Tch	150	°C
Storage temperature	Tstg	–55 to +150	°C

* PW ≤ 10 µs, duty cycle ≤ 1 %
** Value at Tc = 25 °C

Table 2 Electrical Characteristics (Ta = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test conditions
Drain to source breakdown voltage	$V_{(BR)DSS}$	20	—	—	V	I_D = 10 mA, V_{GS} = 0
Gate to source breakdown voltage	$V_{(BR)GSS}$	±20	—	—	V	I_G = ±100 µA, V_{DS} = 0
Gate to source leak current	I_{GSS}	—	—	±10	µA	V_{GS} = ±16 V, V_{DS} = 0
Zero gate voltage drain current	I_{DSS}	—	—	100	µA	V_{DS} = 16 V, V_{GS} = 0
Gate to source cutoff voltage	$V_{GS(off)}$	1.0	—	2.5	V	I_D = 1 mA, V_{DS} = 10 V
Static drain to source on state resistance	$R_{DS(on)}$	—	0.04	0.053	Ω	I_D = 4 A V_{GS} = 10 V *
		—	0.058	0.075	Ω	I_D = 4 A V_{GS} = 4 V *
Forward transfer admittance	$\|y_{fs}\|$	5	9	—	S	I_D = 4 A V_{DS} = 10 V *
Input capacitance	Ciss	—	800	—	pF	V_{DS} = 10 V
Output capacitance	Coss	—	680	—	pF	V_{GS} = 0
Reverse transfer capacitance	Crss	—	165	—	pF	f = 1 MHz
Turn–on delay time	$t_{d(on)}$	—	15	—	ns	I_D = 4 A
Rise time	t_r	—	60	—	ns	V_{GS} = 10 V
Turn–off delay time	$t_{d(off)}$	—	100	—	ns	R_L = 5 Ω
Fall time	t_f	—	80	—	ns	
Body–drain diode forward voltage	V_{DF}	—	0.9	—	V	I_F = 7 A, V_{GS} = 0
Body–drain diode reverse recovery time	t_{rr}	—	80	—	ns	I_F = 7 A, V_{GS} = 0, diF / dt = 20 A / µs

* Pulse Test

Power vs. Temperature Derating

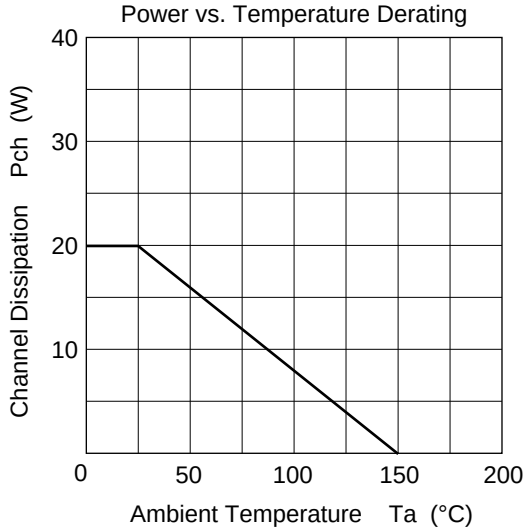

Maximum Safe Operation Area

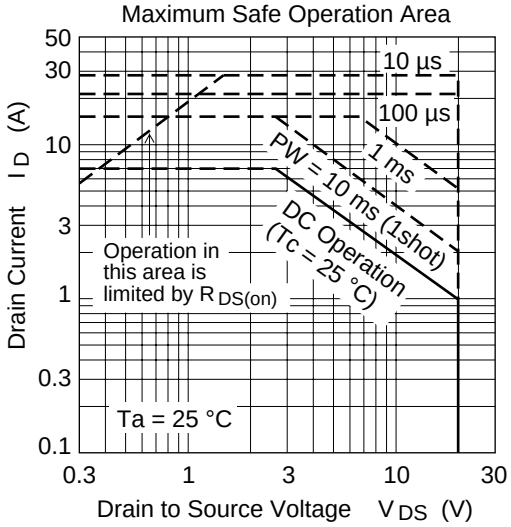

Typical Output Characteristics

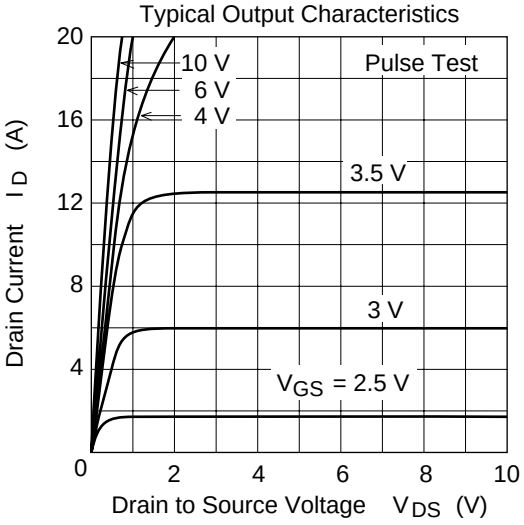

Typical Transfer Characteristics

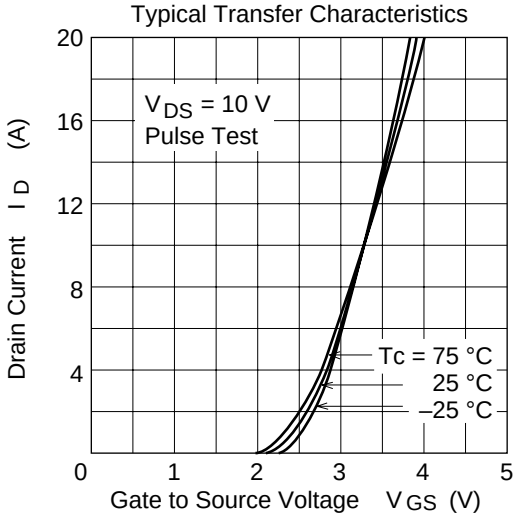

Drain to Source Saturation Voltage vs. Gate to Source Voltage

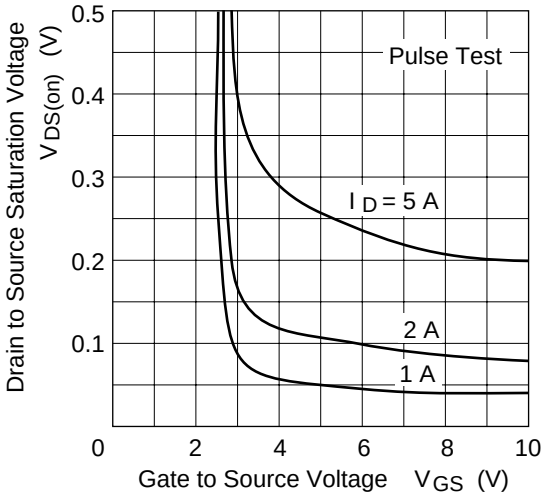

Static Drain to Source State Resistance vs. Drain Current

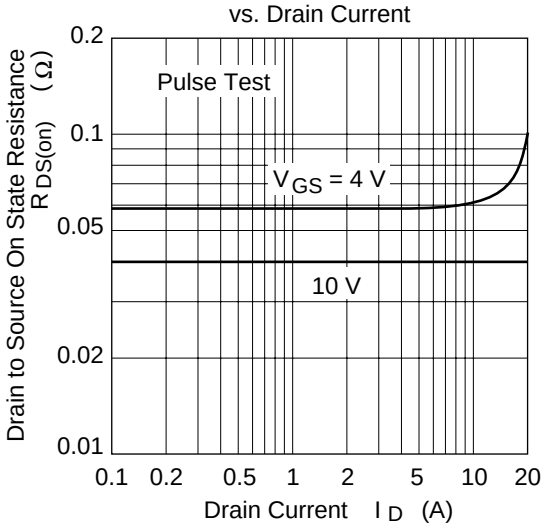

Static Drain to Source on State Resistance vs. Temperature

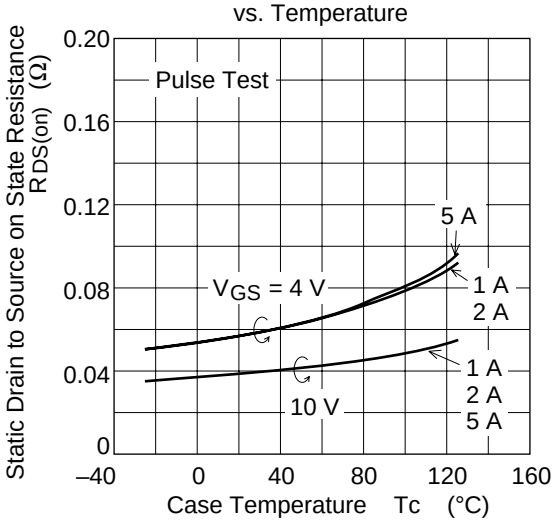

Forward Transfer Admittance vs. Drain Current

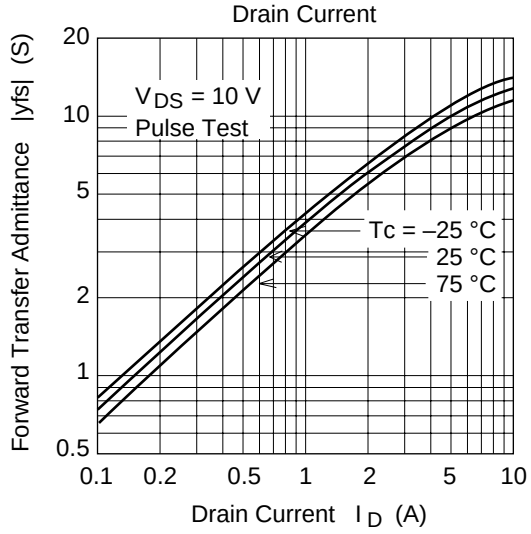

Body–Drain Diode Reverse Recovery Time

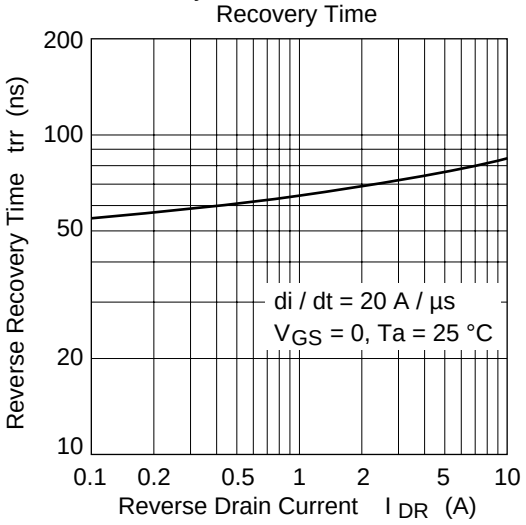

Typical Capacitance vs. Drain to Source Voltage

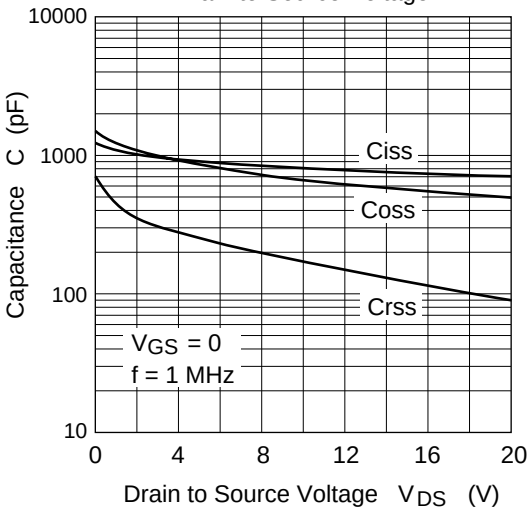

Dynamic Input Characteristics

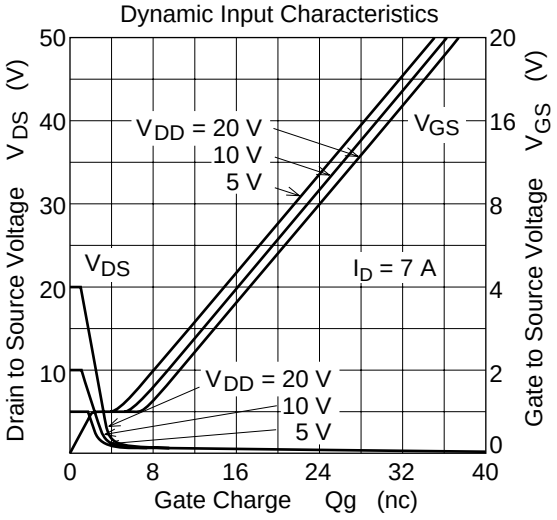

Switching Characteristics

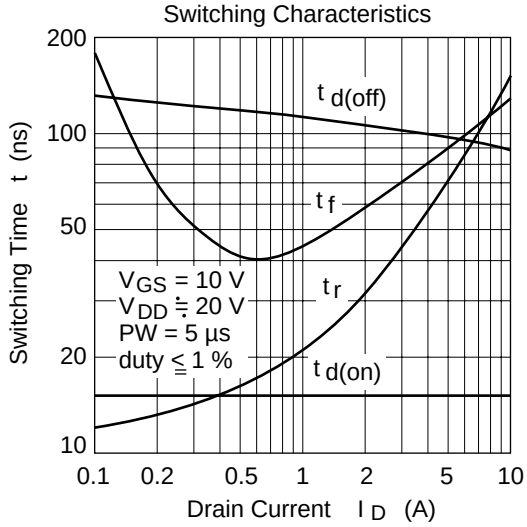

Reverse Drain Current vs.
Souece to Drain Voltage

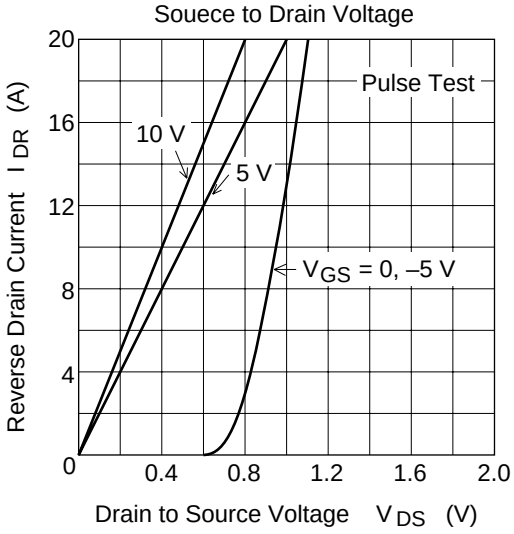

Normalized Transient Thermal Impedance vs. Pulse Width

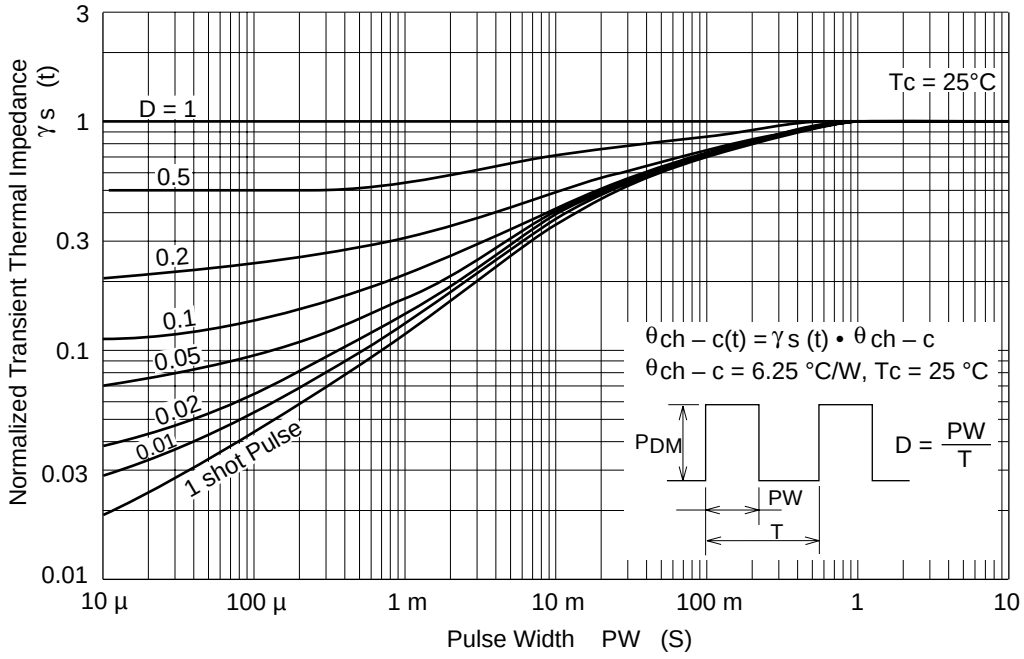

Switching Time Test Circuit

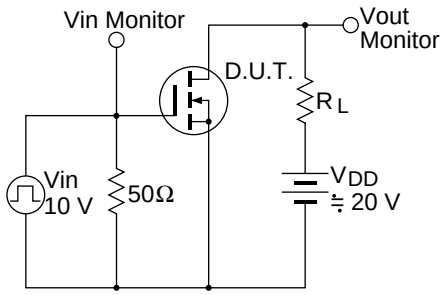

Waveform