



LA4538M

Ripple Filter-Provided Stereo Power Amplifier for 1.5V Headphone Stereos


Features

- Low current dissipation.
- Excellent reduced voltage characteristics.
- Minimum number of external parts required.
- On-chip power switch function.
- Power amplifier section
 - Output power 8mW typ ($V_{CC}=1.5V$, $R_L=16\Omega$, $f=1kHz$, $THD=10\%$)
 - Ripple rejection 46dB typ ($V_{CC}=1.0V$, $V_R=-30dBm$, $f_R=100Hz$)
- Ripple filter section
 - Ripple rejection 39dB typ ($V_{CC}=1.0V$, $V_R=-35dBm$, $f_R=100Hz$)
 - Less output voltage loss
 - Pin 8 can be used to perform the muting current.

Package Dimensions

unit:mm

3111-MFP14S

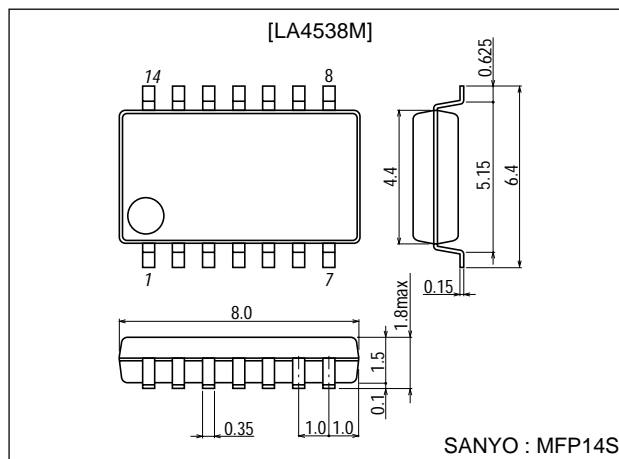

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ C$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC\ max}$	Quiescent	4.5	V
Maximum output current	I_{O7}	Pin 7 flow-out current	5.0	mA
Allowable power dissipation	$P_d\ max$		300	mW
Operating temperature	T_{opr}		-20 to +75	$^\circ C$
Storage temperature	T_{stg}		-40 to +125	$^\circ C$

Operating Conditions at $T_a = 25^\circ C$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended operating voltage	V_{CC}		1.5	V
Operating voltage range	$V_{CC\ op}$		0.9 to 4.0	V
Recommended load resistance	R_L		16 to 32	Ω

Operating Characteristics at $T_a = 25^\circ C$, $R_L=16\Omega$, $R_g=600\Omega$, See specified Test Circuit.

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Quiescent current	I_{cc01}	$V_{CC}=1.20V$, quiescent, $R_L 3 \rightarrow OFF$		4.5	7.0	mA
	I_{cc02}	$V_{CC}=2.50V$, pin 14 $\rightarrow GND$, $R_L 3 \rightarrow OFF$		1.5	2.5	mA
	I_{cc03}	$V_{CC}=2.50V$, pin 1 $\rightarrow GND$, $R_L 3 \rightarrow OFF$			1.0	μA
Voltage gain	V_G	$V_{CC}=0.90V$, $f=1kHz$, $V_O=-20dBm$	27.5	29	31.5	dB
Voltage gain difference	ΔV_G	$V_{CC}=0.90V$, $f=1kHz$, $V_O=-20dBm$			1.0	dB

Continued on next page.

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.


■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

LA4538M

Continued from preceding page.


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Total harmonic distortion	THD	$V_{CC}=1.20V$, $f=1kHz$, $P_O=0.5mW$		0.9	1.5	%
Output power	P_O	$V_{CC}=1.50V$, $f=1kHz$, THD=10%	5	8		mW
Crosstalk	CT	$V_{CC}=1.20V$, $f=100Hz$, $R_g=1k\Omega$, $V_O=-20dB$	40	45		dB
Ripple rejection (amplifier section)	SVRR1	$V_{CC}=1.00V$, $f=100Hz$, $R_g=1k\Omega$, $V_R=-30dBm$, BPF=100Hz	40	46		dB
Ripple rejection (filter section)	SVRR2	$V_{CC}=1.00V$, $f=100Hz$, $V_R=-35dBm$	34	39		dB
Output noise voltage	V_{NO}	$V_{CC}=2.50V$, $R_g=1k\Omega$, BPF=20Hz to 20kHz		55	80	μV
Power on current sensitivity	$I_{1(on)}$	$V_{CC}=0.85V$, $V_{pin5} \geq 0.5V$		0.1	1.0	μA
Power off voltage sensitivity	$V_{1(off)}$	$V_{CC}=0.85V$, $V_{pin5} \leq 0.1V$	0.5	0.6		V
Muting off current sensitivity	$I_{14(off)}$	$V_{CC}=0.85V$, $V_{pin5} \geq 0.5V$		0.1	1.0	μA
Muting on voltage sensitivity	$V_{14(on)}$	$V_{CC}=0.85V$, $V_{pin5} \leq 0.1V$	0.5	0.6		V
Ripple filter output voltage	V_F	$V_{CC}=1.00V$, $R_L=68\Omega$	0.90	0.94		V

Equivalent Circuit Block Diagram

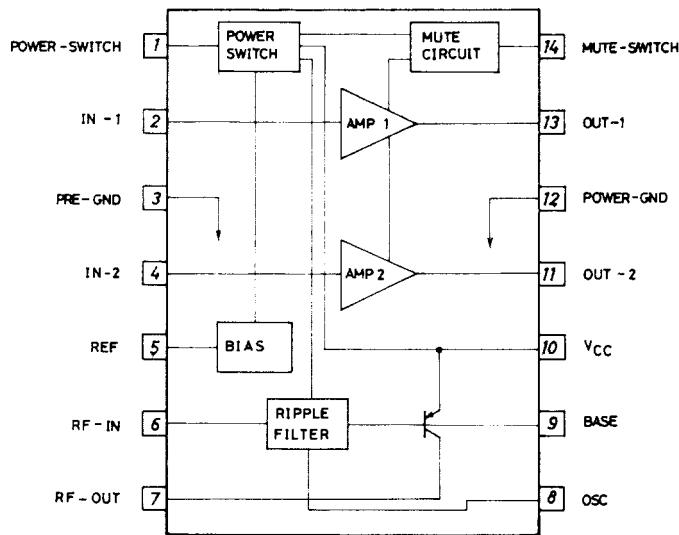


Test Circuit

Unit (resistance: Ω , capacitance: F)

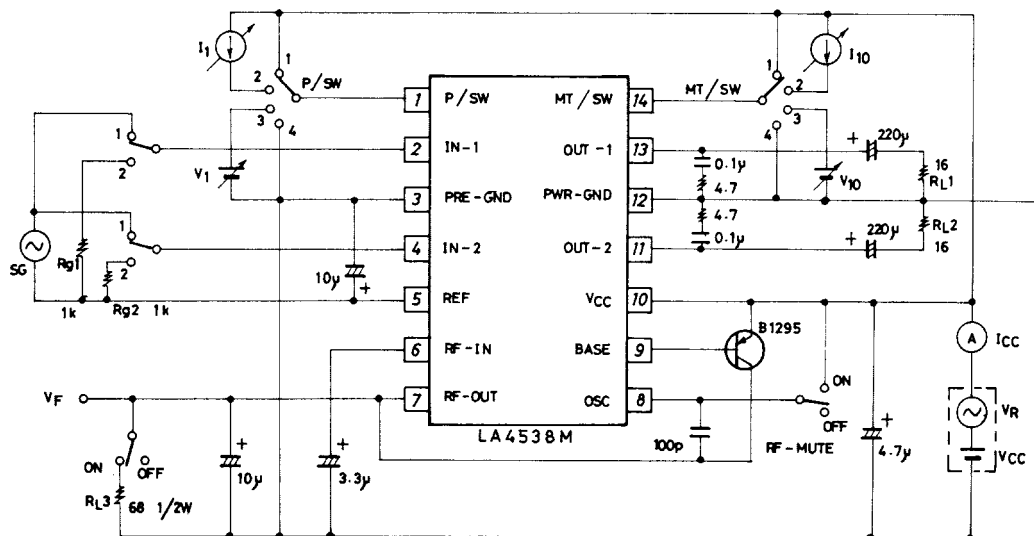

Sample Application Circuit

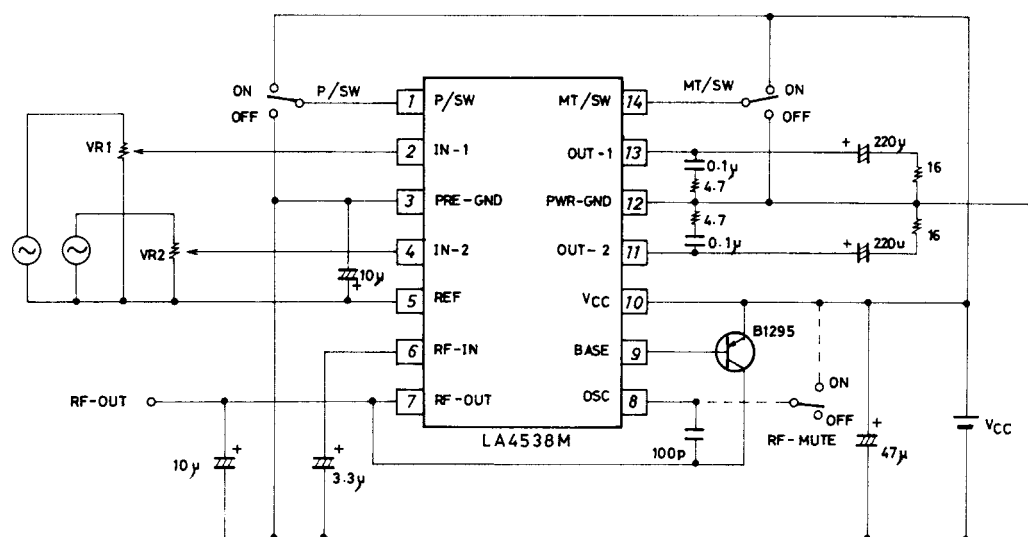Unit (resistance: Ω , capacitance: F)

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of February, 2000. Specifications and information herein are subject to change without notice.