



APMD local-identifiability: path-pair data and held-out decoding

Stage 4 path-pair measurements define jF/jd directions; Stage 6.3 projects held-out states into pd, pF and residual coordinates and tests two-output decoding. Model evidence: train = 1161 states; held-out = 234 states.


a Local pd coordinate tracks d

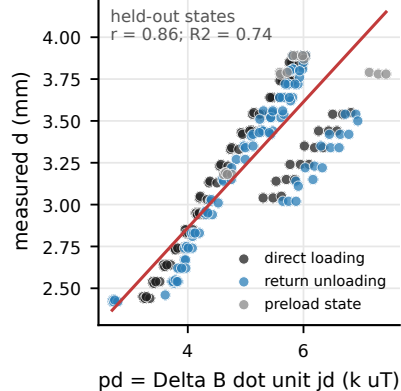


b Force information beyond d

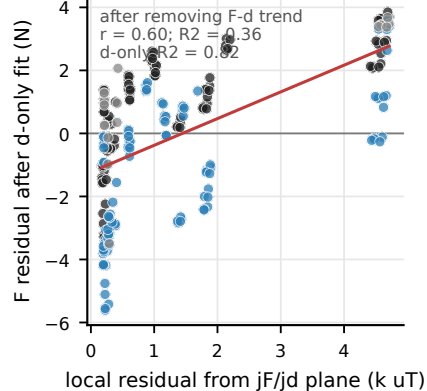


c jF/jd directions used for projection

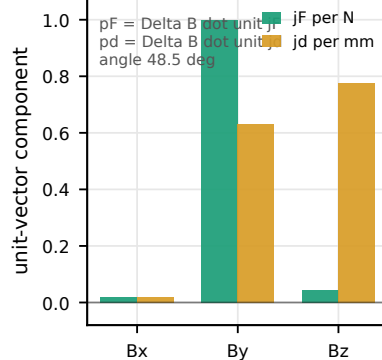

d Paired force-error reduction

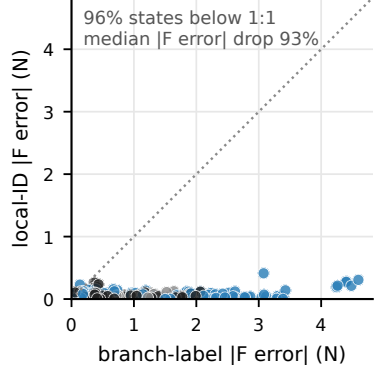

e Held-out force-error distribution

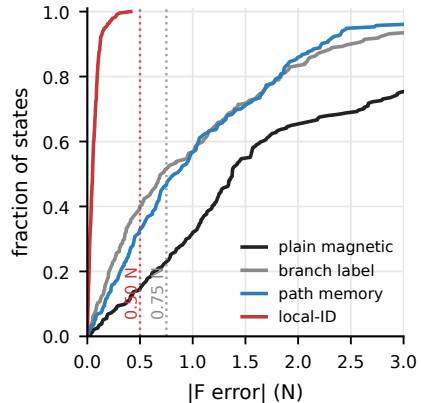

f Two-output residual portrait

