


Switch-level boundary case: topology2 A-phase LVRT 0.50 pu / 200 ms

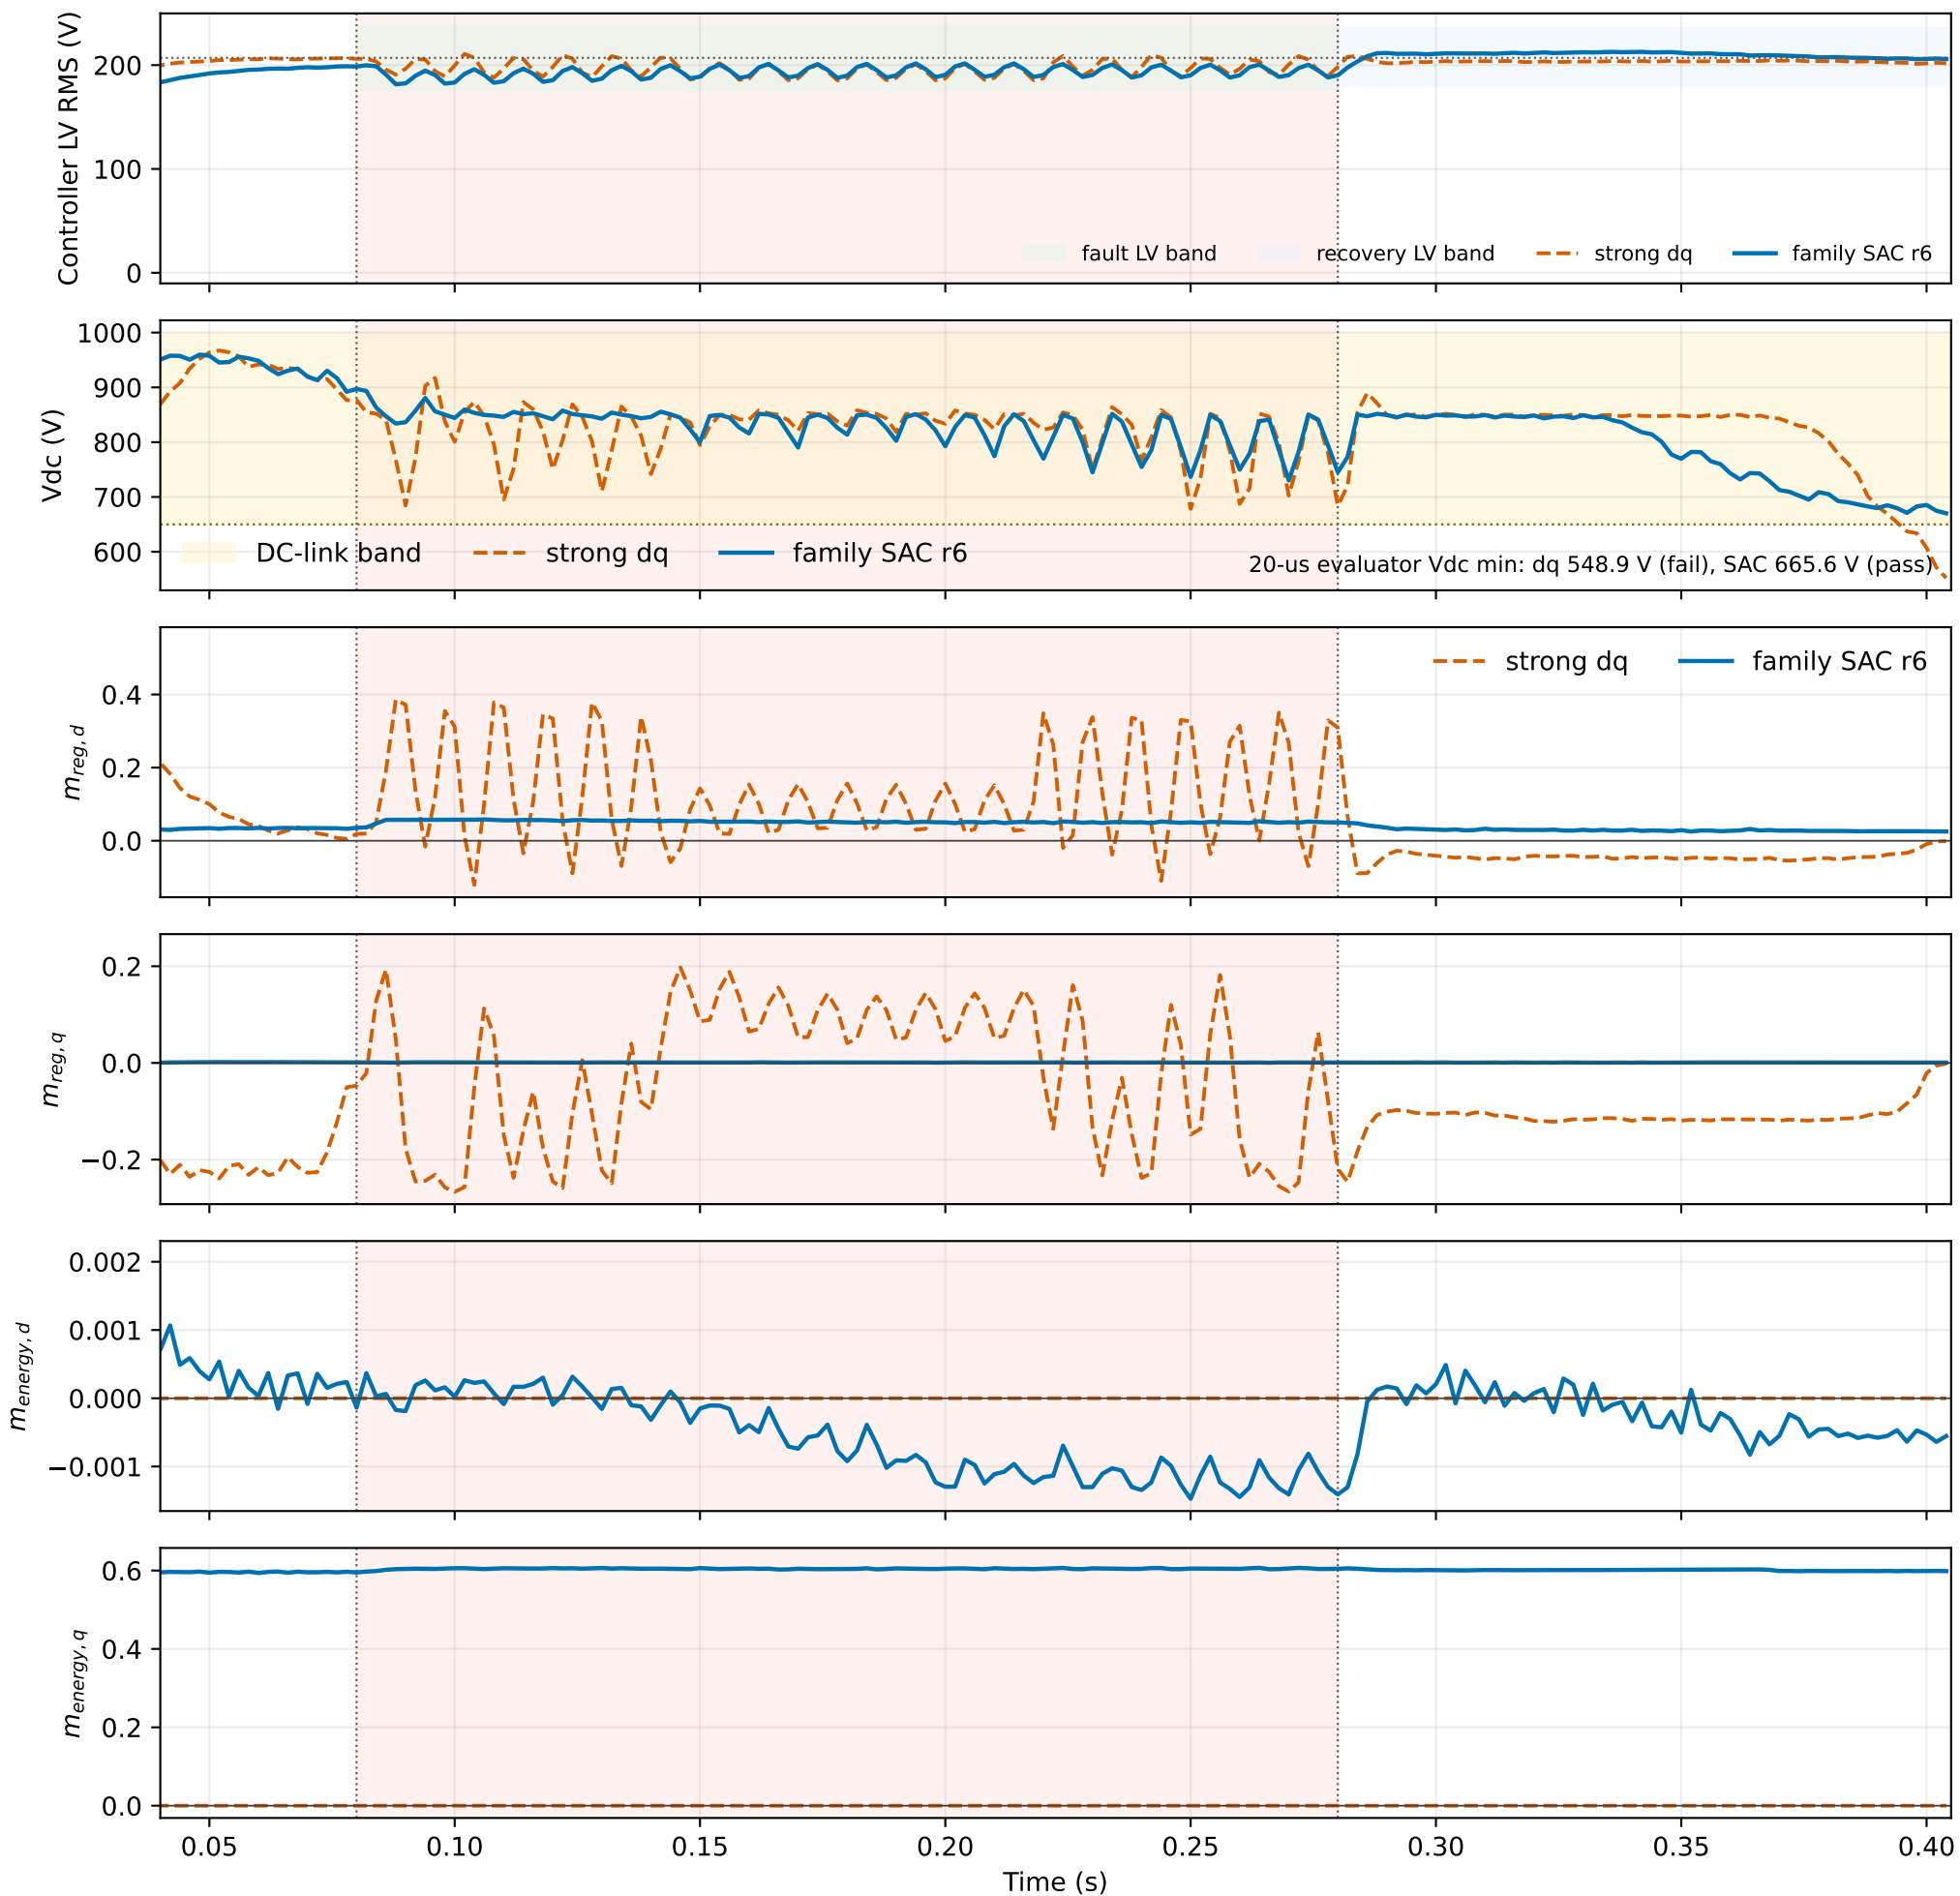

Raw Simulink switch-level signals sampled every 2 ms; LV metric is the controller-filtered RMS used by the validator.