

CLIENT SLD DRAFT / SEMINAR HALL AV

Seminar Hall AV Layout for 30 ft x 60 ft Room



Equipment arrangement, signal flow and cable routing based on the supplied BOQ. The design assumes the main teaching wall / display wall is on the 30 ft front side and seating runs along the 60 ft depth.

DESIGN BASIS

Room	30 ft width x 60 ft depth seminar hall
Front	98-inch interactive display with digital podium
Audio	6 wall/ceiling speaker points on 100V line zones
Control	12U rack near front-right / podium side for service access

Room Orientation Plan

Top-view equipment placement for client discussion. Final mounting height, conduit path and exact speaker distance should be confirmed after site measurement.

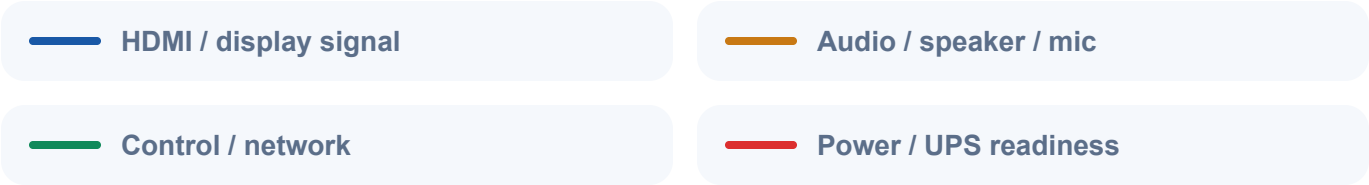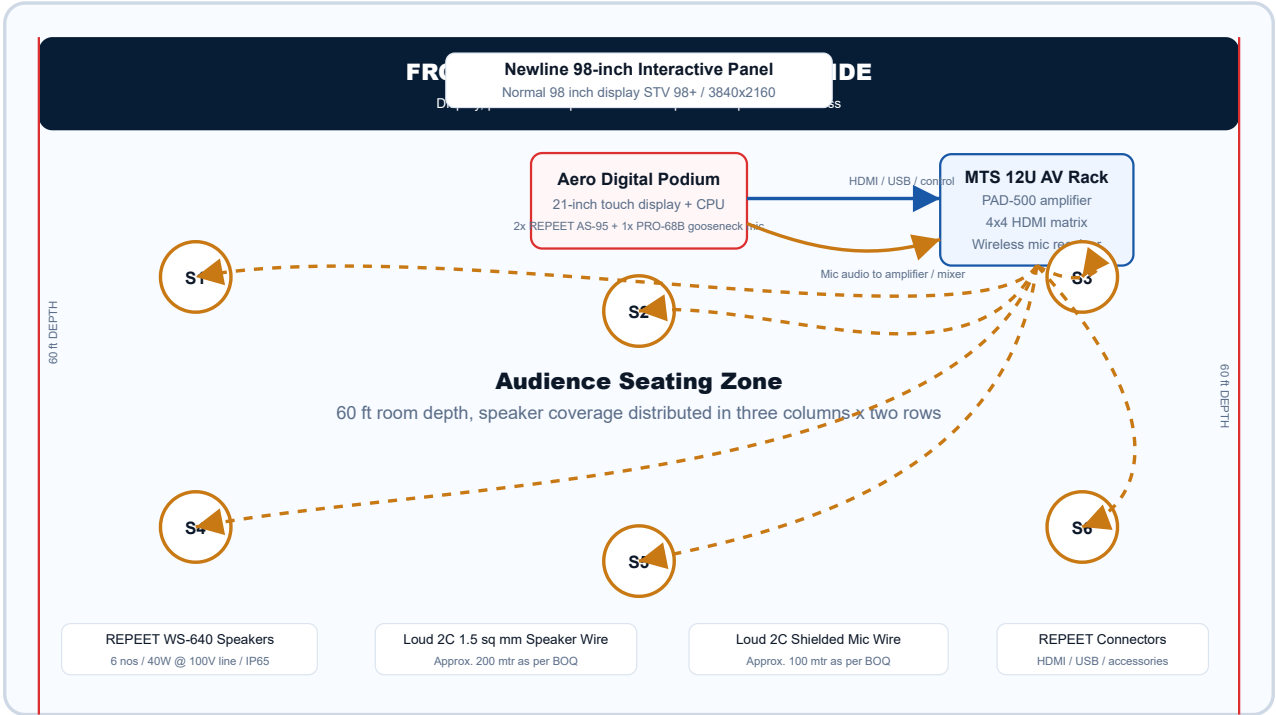

Single Line Diagram

The SLD shows how source, display, microphone, amplification and speaker systems connect through the AV rack.



Equipment Schedule

BOQ items mapped to their suggested physical location and role in the system.

MAKE	MODEL / ITEM	QTY	PROPOSED LOCATION	SYSTEM ROLE
Newline	Interactive Panel Display, normal 98 inch display STV 98+	1 Nos	Front teaching wall, center aligned	Main 4K interactive display and teaching surface
Aero	Digital Podium with 21-inch or above touch display and CPU	1 Nos	Front center / slightly left of display	Presenter source, podium control and content operation
Linetek	4x4 HDMI Matrix Switcher	1 Nos	Inside 12U AV rack	Routes HDMI sources to display/output points
REPEAT	WS-640 Two-way full range speaker, 40W @ 100V line	6 Nos	Distributed in 3 columns x 2 rows across seating area	Audience sound reinforcement
REPEAT	PAD-500 500W mixer amplifier with 6 zone output	1 Nos	Inside 12U AV rack	Speaker amplification and mic/source mixing
REPEAT	AS-2300HH Wireless Dual Handheld Microphone	1 Nos	Receiver in rack, microphones with presenter/team	Wireless speech pickup for presenter and Q&A
REPEAT	AS-95 Wired Gooseneck Microphone	2 Nos	Digital podium / dais table	Fixed speech pickup for presenters
REPEAT	PRO-68B Wired Gooseneck Microphone	1 Nos	Digital podium / main speaker position	Primary gooseneck microphone
Loud	2 core 1.5 sq mm speaker wire	200 Mtrs	Rack to speaker points via ceiling/conduit	100V speaker line cabling
Loud	2 core shielded microphone wire	100 Mtrs	Podium/dais mic points to rack	Balanced mic signal cabling

MAKE	MODEL / ITEM	QTY	PROPOSED LOCATION	SYSTEM ROLE
MTS	12U equipment rack with fan, wheels, PDU and tray	1 Nos	Front-right service corner or control side	Central equipment housing
REPEET	Connectors, HDMI, USB and accessories	1 Lot	Rack, podium and display termination points	Complete connectivity and cable termination
ITC	Installation, testing and commissioning	1 Job	Complete room	System installation, testing, tuning and handover

Cable Schedule

FROM	TO	CABLE	PURPOSE
Digital Podium	Linetek 4x4 Switcher	HDMI + USB as required	Presenter content and touch/control path
Linetek 4x4 Switcher	Newline 98-inch Display	HDMI output + USB touch	Main display signal and interactive feedback
AS-95 / PRO-68B Gooseneck Mics	REPEET PAD-500	2 core shielded mic cable	Speech audio input
AS-2300HH Receiver	REPEET PAD-500	Audio patch cable	Wireless mic input
REPEET PAD-500	6x WS-640 Speakers	2 core 1.5 sq mm speaker wire	100V line speaker distribution
Site Power	Rack / Display / Podium	Electrical by site	Dedicated power and UPS-ready provision

Installation Notes

Recommended orientation: Keep the display and podium on the front 30 ft wall. Place the AV rack close to the podium side but not blocking the audience path. Speaker points should be adjusted after checking ceiling type, false ceiling access, beam positions and final seating layout.

Client approval points: Final rack location, display mounting height, conduit route, speaker mounting type, power socket location and podium position should be frozen before installation starts.