


8086 Microprocessor Internal Registers

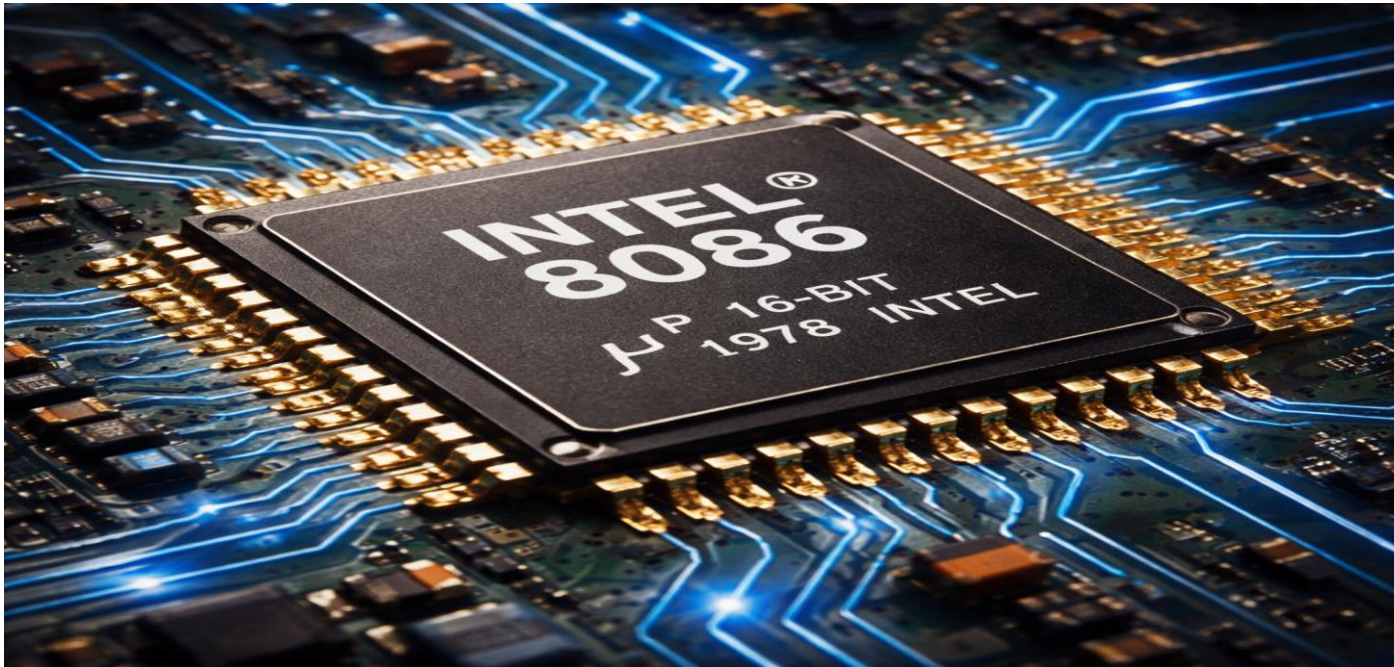

Marwa Jassim Mohammad
Thafar Sami Hammadi

Addressing Mode

1) Immediate Addressing Mode:

MOV Ax, 103C 16 bits

10	3C
----	----

 Ax


MOV DL, 08 8 BITS

Dh	Dl
	08


 Dx

2) Direct Addressing Mode:

MOV Ax, [5000]

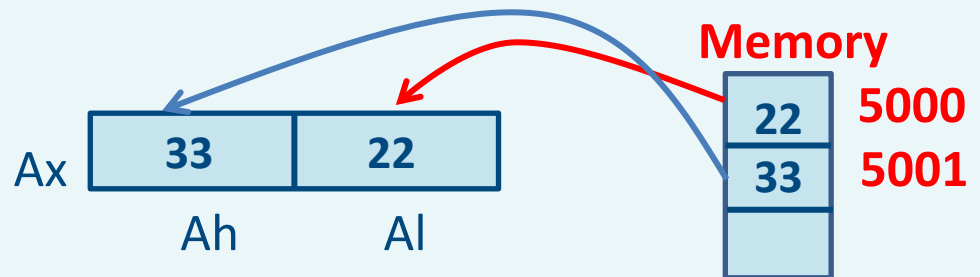


MOV Al, [5000]

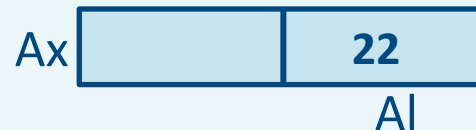

Addressing Mode

3) Register Addressing Mode:

MOV Ax, Bx

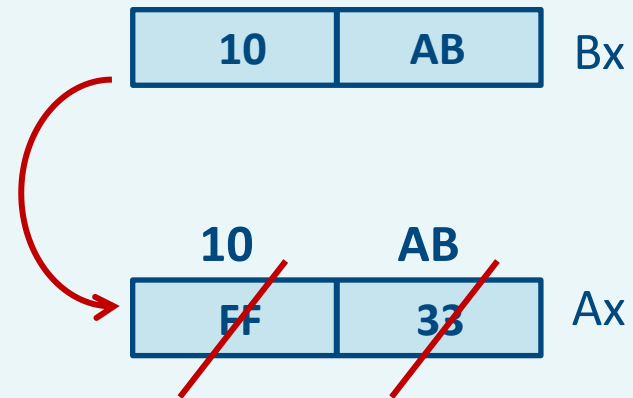


MOV CL, DH

Addressing Mode

4) Register Indirect Addressing Mode:


MOV Ax, [Bx]

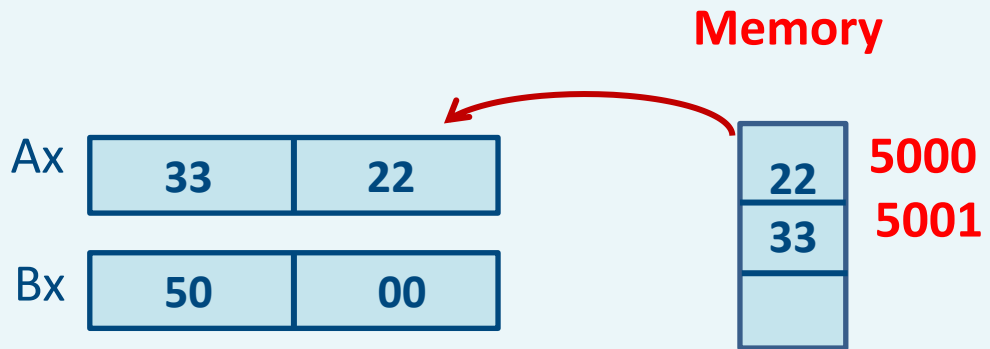

العنوان مكتوب في (BX) ويمثل محتويات في الذاكرة لأن [].

5) Memory Direct Addressing Mode:


MOV [7000], Cx

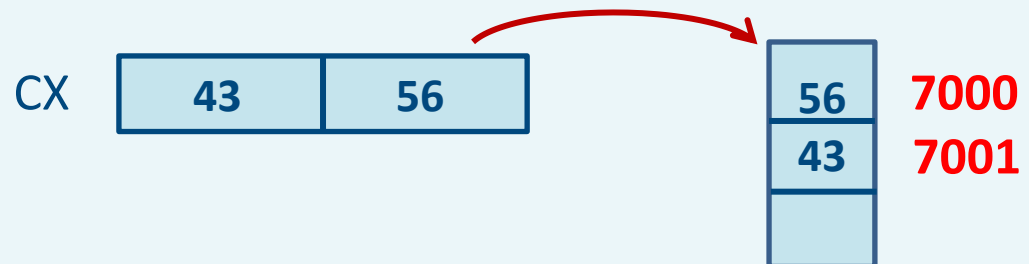

Addressing Mode

6) Based Addressing Mode:

MOV Ax, [Bx] + 50

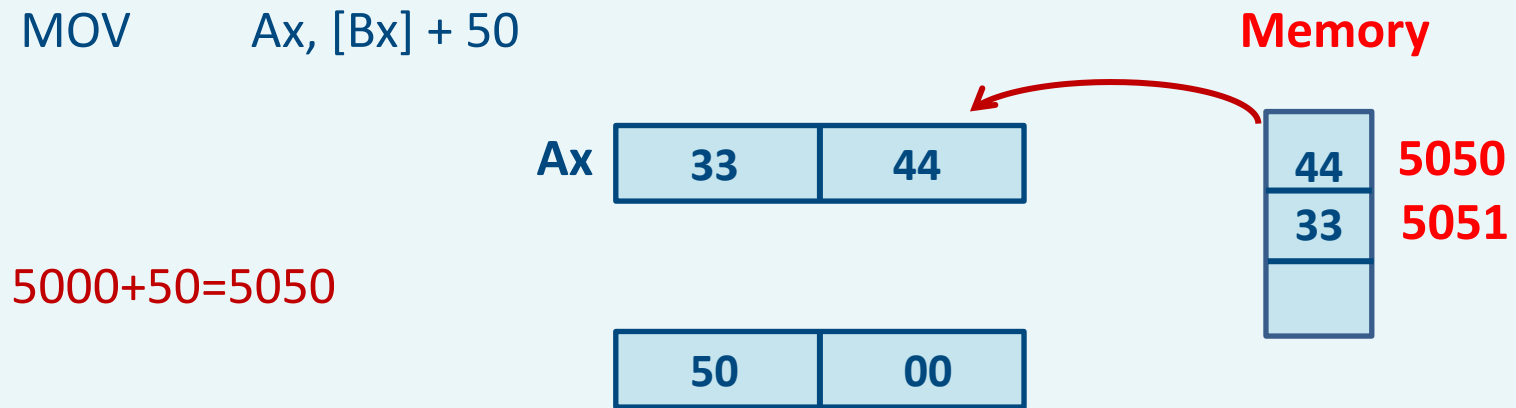


حتى أوجد عنوان (Source) أجمع ما موجود في (BX) مع (50).

Addressing Mode

7) Based Plus Index Addressing Mode:

MOV Ax, [Bx+SI]

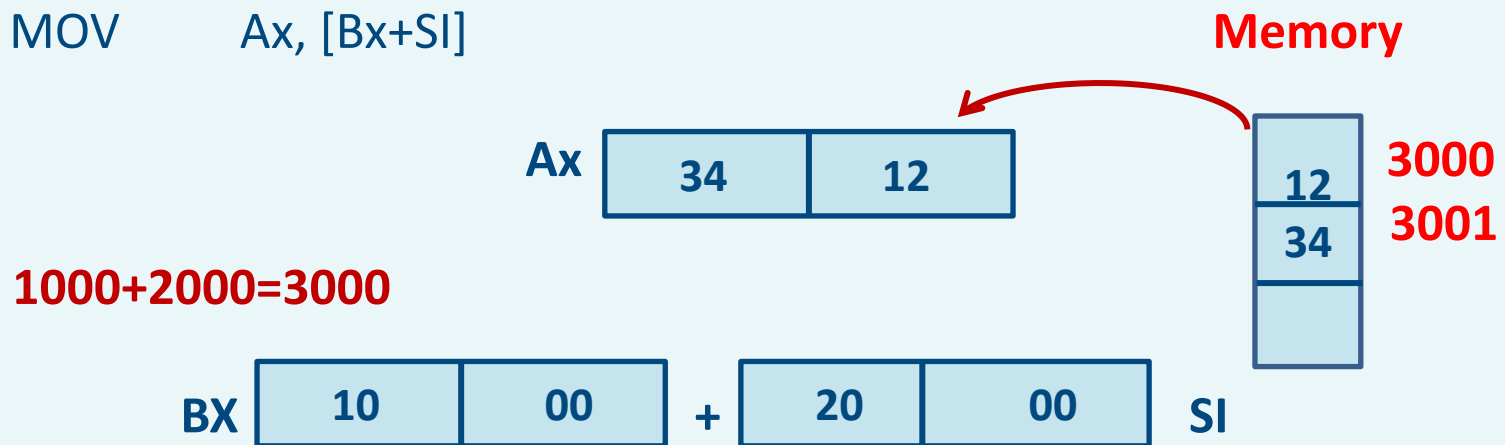

الـ (Source) متكون من (two registers) وهما (Base) و (Index) لأجاد عنوان الذاكرة
أجمع المحتويات.

Addressing Mode

8) Based Plus Index Addressing Mode:

MOV Ax, [Bx+SI+50]

$1000+2000+50=3050$

AX



Memory



3050

3051



AX

+



SI

+ 50