

1. Description

1.1. Project

Project Name	Project2
Board Name	custom
Generated with:	STM8CubeMX 1.1.0
Date	07/24/2019


1.2. MCU

MCU Series	STM8S
MCU Line	STM8S003/005/007 Value Line
MCU name	STM8S003F3Px
MCU Package	TSSOP20
MCU Pin number	20

1.3. Caution

The report was generated although the configuration was in a modified state. It may be not accurate

2. Pinout Configuration

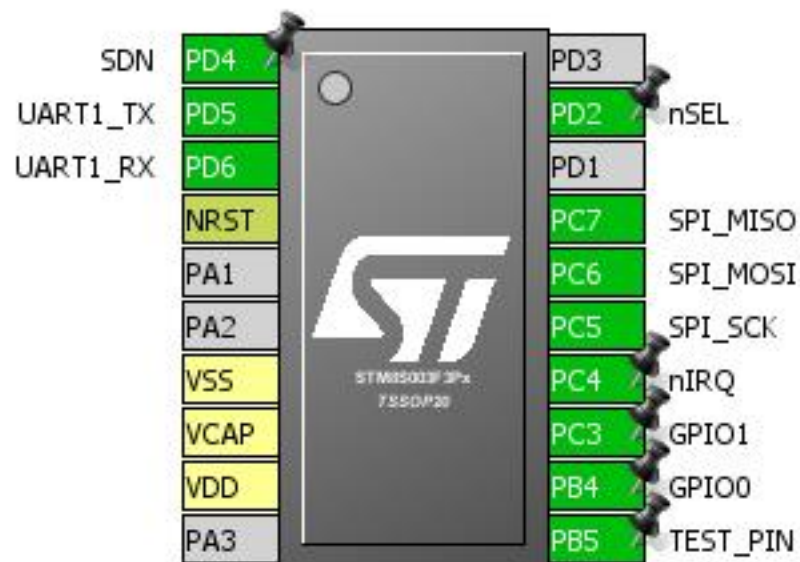


3. Pins Configuration

Pin Number TSSOP20	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PD4 *	I/O	GPIO_Output	SDN
2	PD5	I/O	UART1_TX	
3	PD6	I/O	UART1_RX	
4	NRST	Reset		
7	VSS	Power		
8	VCAP	Power		
9	VDD	Power		
11	PB5 *	I/O	GPIO_Output	TEST_PIN
12	PB4 *	I/O	GPIO_Output	GPIO0
13	PC3 *	I/O	GPIO_Output	GPIO1
14	PC4 *	I/O	GPIO_Input	nIRQ
15	PC5	I/O	SPI_SCK	
16	PC6	I/O	SPI_MOSI	
17	PC7	I/O	SPI_MISO	
19	PD2 *	I/O	GPIO_Output	nSEL

* The pin is affected with an I/O function

4. Clock Tree Configuration

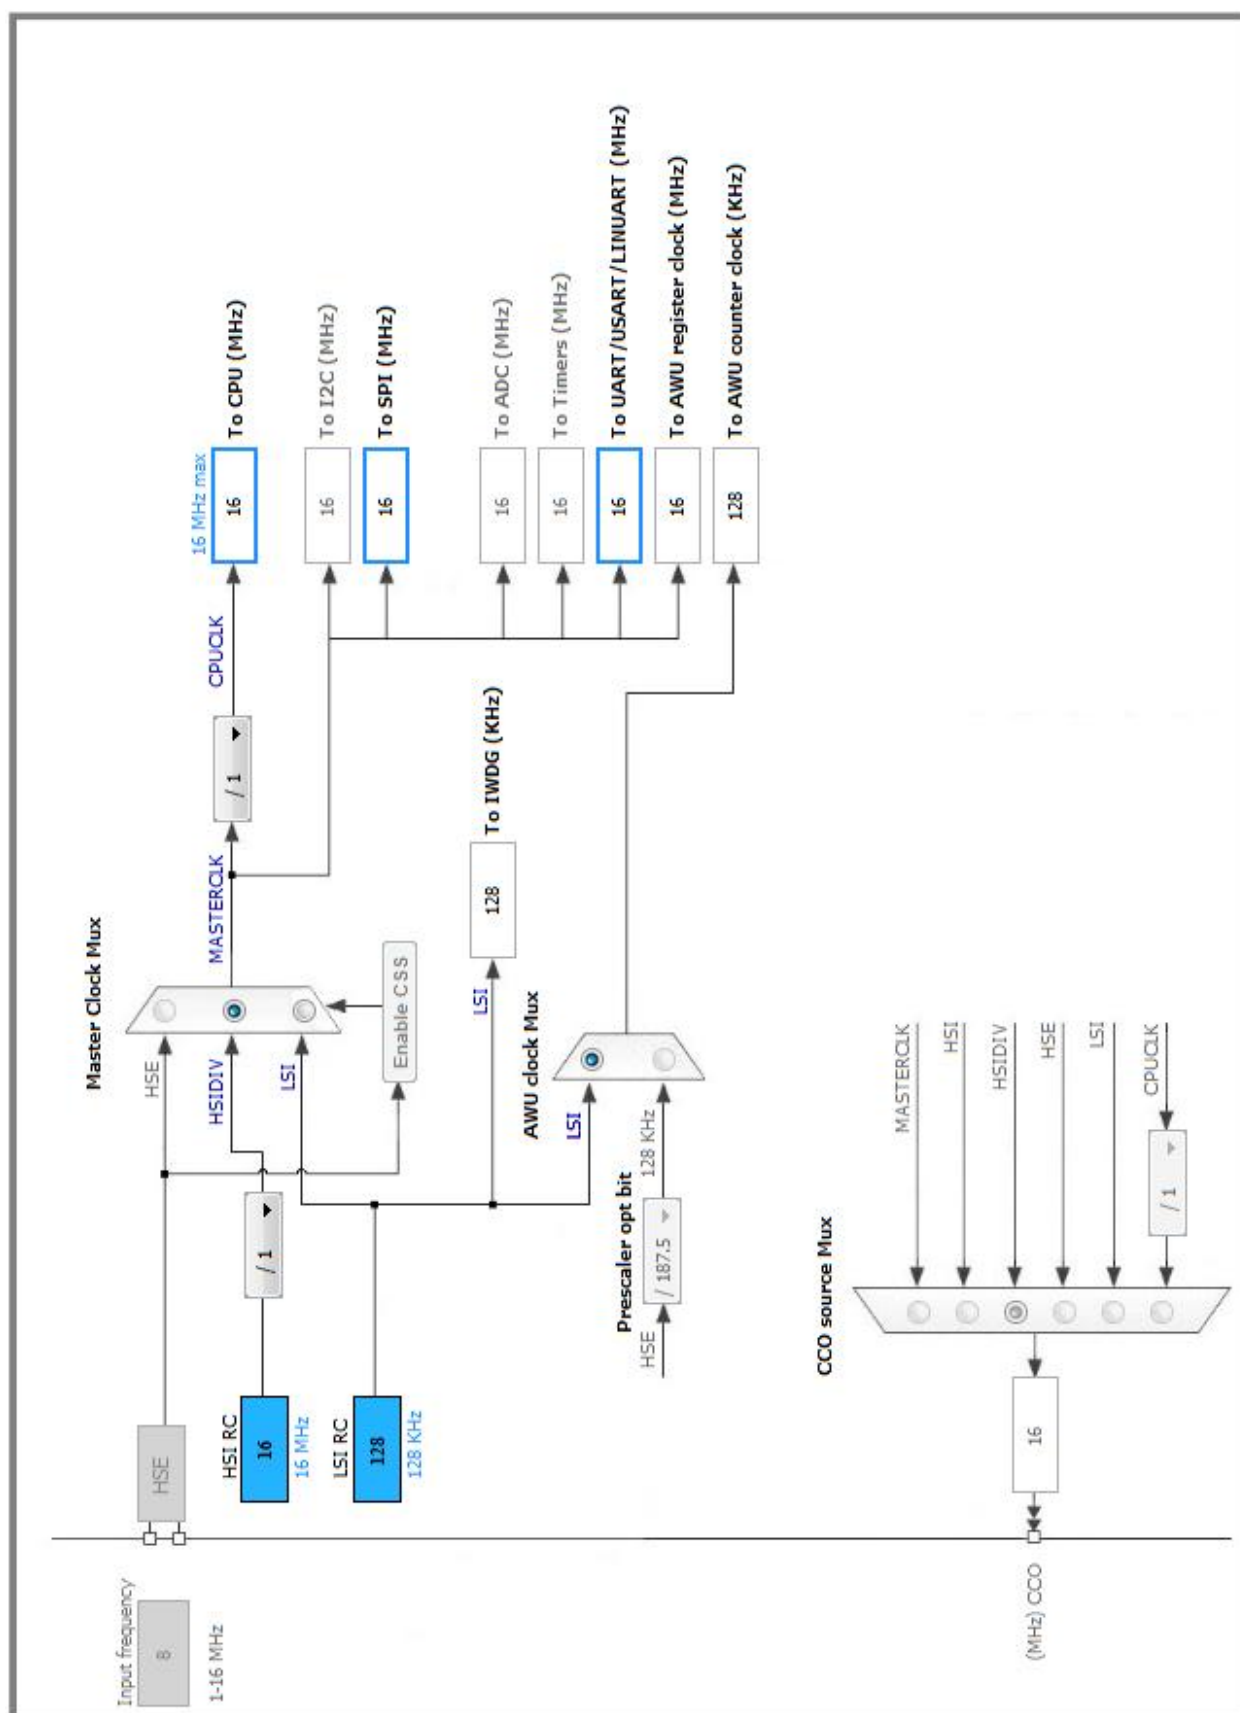

5. Power Consumption Calculator report

5.1. Microcontroller Selection

Series	STM8S
Line	STM8S003/005/007 Value Line
MCU	STM8S003F3Px
Datasheet	18576_Rev8

5.2. Parameter Selection

Temperature	25
Vdd	null