



This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval AB (publ) or any of its affiliates (jointly "Alfa Laval"). No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.


FRAME PLATE

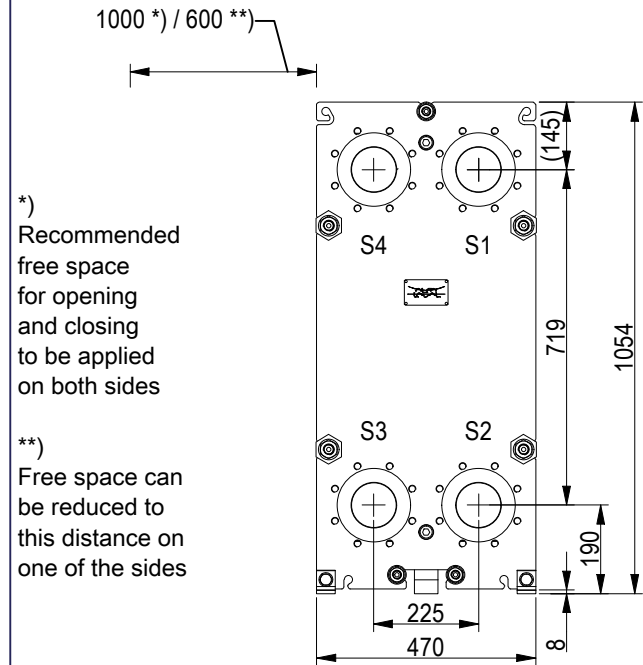

EN 1092-1 DN100 PN10
S1, S2, S3, S4
A-A: TI
Raised face

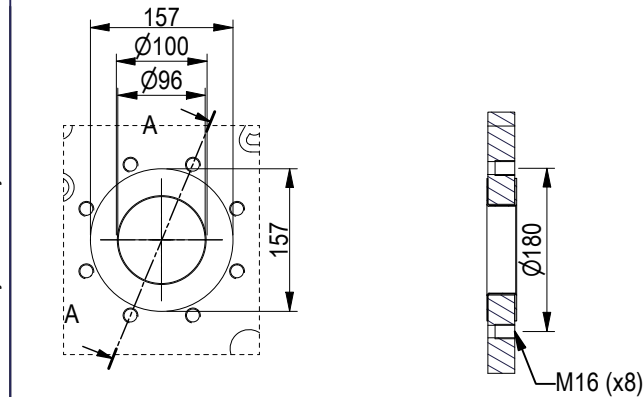


Space between pressure plate and supporting column should be kept free from fixed installations!

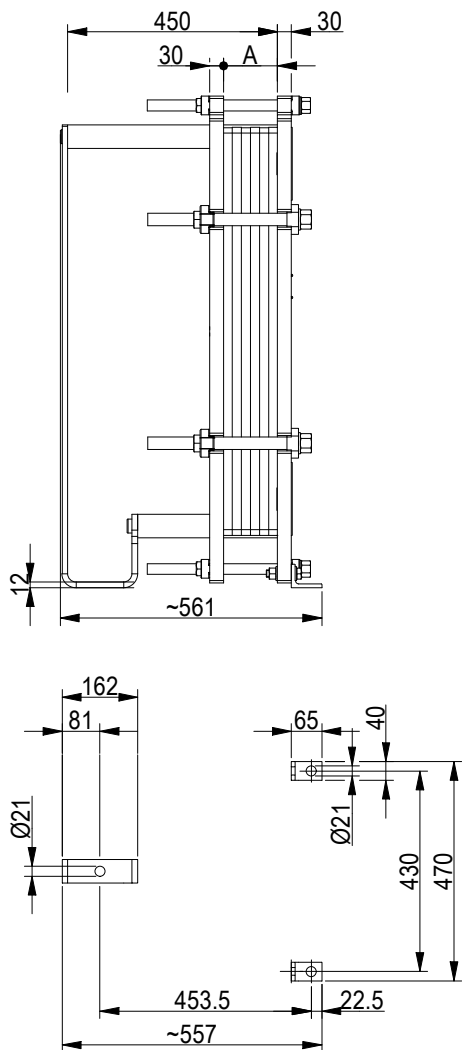


PRESSURE PLATE

(MOVABLE)

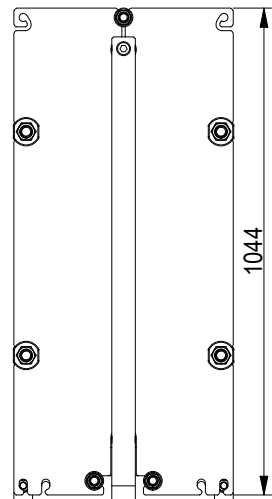

All dimensions in millimeters (mm)

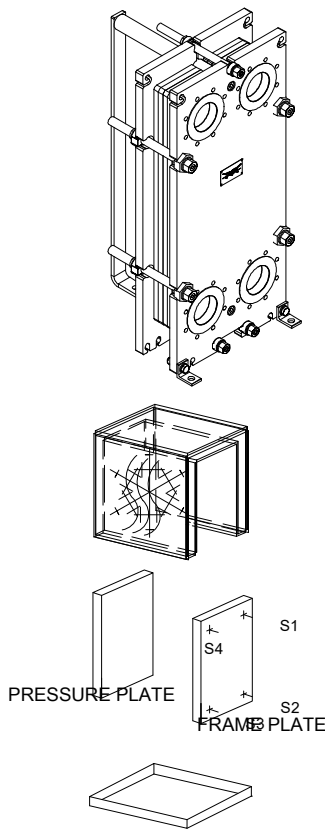


TIGHTENING BOLTS	4 x M24, L = 477 mm
A	3 x M20, L = 330 mm
APPROX. OUTER DIMENSIONS	121 mm +1%/-1%
LENGTH	500 mm
WIDTH	480 mm
HEIGHT	1050 mm
APPROX. WEIGHTS	
NET WEIGHT, EMPTY	304 kg
WEIGHT FULL OF WATER	330 kg
PLATE MATERIAL	Titanium
PLATE THICKNESS	0.5 mm
GASKET	NBRB ClipGrip™
HEAT TRANSFER AREA	9.88 m²
CHANNEL ARRANGEMENT	1*20 HWi / 1*19 HNa

HEAT EXCHANGED		857.4 kW	NO. OF UNITS			1					DESIGN PRESSURE		DESIGN TEMPERATURE		TEST	OPERATING
SIDE	MEDIA	FLUID CLASSIFICATION GROUP	CHAN.	INLET	TEMP.	OUTLET	TEMP.	FLOW RATE	PRES. DROP	LIQUID VOL.	MAX.	MIN.	MAX.	MIN.	PRESSURE	MAX. TEMP.
1	Water	2	Wi	S1	60.0 °C	S2	41.2 °C	40.00 m³/h	65.6 kPa	14.4 dm³	10.0 bar	0.0 bar	60.0 °C	0.0 °C	14.3 bar	60.0 °C
2	Water	2	Na	S3	18.0 °C	S4	55.0 °C	20.00 m³/h	40.2 kPa	11.7 dm³	10.0 bar	0.0 bar	55.0 °C	0.0 °C	14.3 bar	55.0 °C



DRAWING
GASKETED PLATE HEAT EXCHANGER
T10-BFM
PED Article 4.3



Water Heater
Water Heater T10 BFM (Hot side - 40m3/h)

Do not use this drawing for foundation bolting, piping layout
or planning of lifting and handling of the equipment.

DATE 04-09-24
REVISION 0