

Volute Casing Pumps

NOW 32125...200250

SIHI-HALBERG



TECHNICAL DATA

Capacity:	2 – 740 m ³ /h
Head:	2 – 100 m
Speed:	up to 3600 rpm
Temperature:	up to 170 °C
Casing pressure:	up to 10 bar
Shaft seal:	stuffing box or mechanical seal
Direction of rotation:	clockwise looking towards shaft end


APPLICATION

Volute casing pumps of the NOW range are used in all applications involving the trouble-free handling of clean or turbid, non-aggressive liquids which do not contain any solid constituents. Hence they are suitable for

- drinking water supply of local communities
- general water supply duty in agriculture, trade and industry
- irrigation and draining
- spray irrigation
- handling of brine and lye
- circulating high temperature water up to 170 °C, cooling water and oil in heating and cooling circuits

Thanks to exceptionally favourable NPSH, pumps of the NOW range are also used with advantage for

- handling condensate.

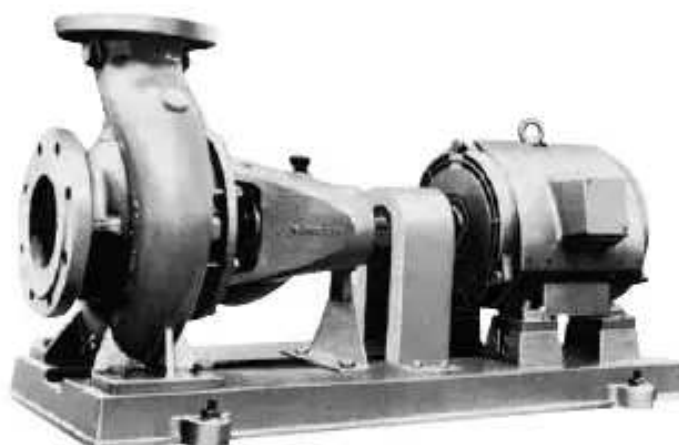

DESIGN DETAILS

Casing pressure:

- Up to 10 bar respectively from –10 °C to 120 °C
- Up to 9 bar respectively from 120 °C to 170 °C

Branch positions:

- Suction branch axial, discharge branch radially upwards.

Flanges:

- The flanges conform to DIN 2532 PN 10. Flanges drilled to ANSI.

Bearings:

- Bearing brackets 25 and 35: two deep groove ball bearings in accordance with DIN 625.
- Bearing bracket 45: one twin row angular contact ball bearing in accordance with DIN 628 at the pump end, and one deep groove ball bearing in accordance with DIN 625 at the drive end.
- Oil lubrication.
- Designation of the above pump type execution: C
- Grease lubrication of the bearings is possible.
- Designation of the above pump type execution: B

Direction of rotation:

- Clockwise as viewed from the drive towards the pump.

Shaft sealing:

- Sealing of the shaft can be effected either by a stuffing box or mechanical seal, as required.

- Designation 041: Self-sealed, uncooled stuffing box. Temperature range: –10 °C to 110 °C
- Designation 051: Uncooled stuffing box with sealing fluid from an outside source and flushing. Temperature range: –10 °C to 110 °C
- Designation 501: Soft packed stuffing box with superimposed cooling compartment for the intensive cooling of the seal unit. Temperature range: up to 170 °C
- Designation BKW: Unbalanced single mechanical seal of elastomeric bellows design, NBR, with self-contained circulation. Temperature range: from –10 °C to 60 °C
- Designation BKS: Unbalanced single mechanical seal with elastomeric bellows, FKM, with self-contained circulation. Temperature range: from –10 °C to 60 °C
- Designation BK3: Unbalanced single mechanical seal of elastomeric bellows design, EPDM, with self-contained circulation. Temperature range: from –10 °C to 110 °C

DESIGN

Horizontal, single-stage volute casing pumps with dimensions and nominal ratings to DIN 24255 based on the process principle, plus 24 additional sizes (NOW and WTS ranges).

The process principle allows dismantling of the complete bearing unit towards the drive end without the pump casing having to be disconnected from the piping. If a spacer type coupling is used it is also unnecessary to disconnect the motor.

Through use of the building block principle, the range requires only three bearing housings. Within a given shaft unit, shaft, shaft seal, impeller nut and bearings are interchangeable.

NOW

Materials of construction:

Part No.	PUMP ART	MATERIALS OF CONSTRUCTION						
		0 B	0 C	0 E	0 R	0 S	0 U	3 B
10.2 16.1	Volute casing Casing cover	0.6025						2.1050.01
23.0	Impeller	0.6025	2.1050.01	1.4408	0.6025	2.1050.01	1.4408	2.1050.01
50.2	Wear ring	0.6025						2.1052.02
21.1	Shaft	1.0503			1.4021			1.4571
52.4	Shaft sleeve (Stuffing box)	1.4122	2.1052.02	1.4122		2.1052.02	1.4122	2.1052.02
52.3	Shaft sleeve (Mechanical seal)	1.4571						
46.1	Stuffing box	Soft packing						
43.3	Shaft seal Mechanical seal	Silicon carbide / Silicon carbide, NBR or FKM Silicon carbide / Carbon, EPDM						

Casing gasket:

The casing is sealed by means of a flat gasket. Designation of this version: 2.
Confined gasket is possible. Designation of this version: 3.

Drive / speed:

By means of commercially available electric motors, Type B 3. The following maximum speeds should be observed:

Pump size	Maximum speed rpm	Pump size	Maximum speed rpm	Pump size	Maximum speed rpm
32125 32160 32200 40125 40160 40200 50125 50160 50200 65125 65160	3600	32250 ¹⁾ 40250 ¹⁾ 50250 ¹⁾ 65200 ¹⁾ 65250 ¹⁾ 80160 ¹⁾ 80200 ¹⁾ 80250 ¹⁾ 100160 ¹⁾ 100200 ¹⁾ 100250 ¹⁾ 125200 ¹⁾	3000	40315 50315 65315 80315 80400 100315 100400 125250 125315 125400 150200 150250 150315 150400 200250	1800

¹⁾ Higher speeds on reinforced bearings possible – please consult us.

Max. shaft loading $\frac{P_N \text{ in kW}}{n \text{ in rpm}}$ for temperatures of liquid handled $\leq 20^\circ\text{C}$

Bearing housings	Shaft material	
	1.0503 ²⁾	1.4021 ²⁾
25	0,011	0,012
35	0,026	0,032
45	0,052	0,072

²⁾ In case impellers are of G-CuSn material the values for 1.0503 shafts apply.

General notes:

The following additional designs are available:


WTS additional sizes to DIN 24 255 for capacities up to 2200 m³/h

We shall be pleased to supply technical information on this range on request.

Sectional drawings and list of parts

Note: Some sizes do not conform to the drawing in all details.


041
Uncooled
soft packed
stuffing box

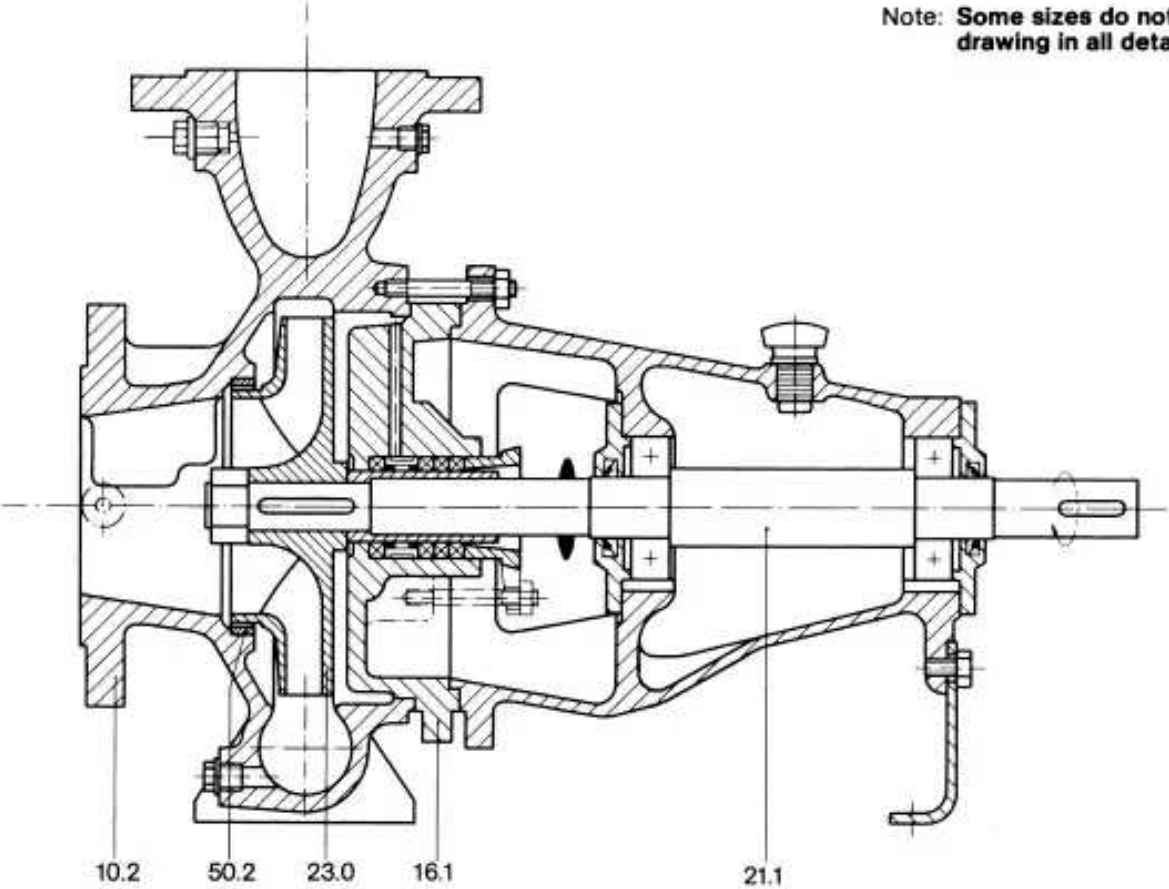

- | | | |
|--------------------|----------------------|-------------------|
| 10.2 Volute casing | 23.0 Impeller | 50.2 Wear ring |
| 16.1 Casing cover | 43.3 Mechanical seal | 52.3 Shaft sleeve |
| 21.1 Shaft | 46.1 Stuffing box | 52.4 Shaft sleeve |


Other types of shaft sealing arrangement

BKW
BKS
BK3

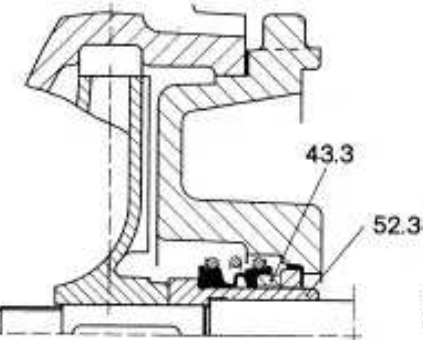


Unbalanced, uncooled
single mechanical seal

051

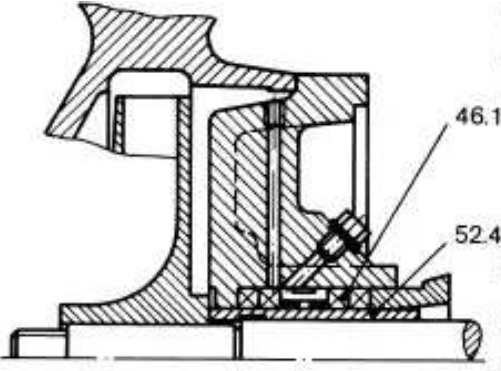

Soft packed stuffing box with sealing fluid
supplied from an outside source and flushing

501

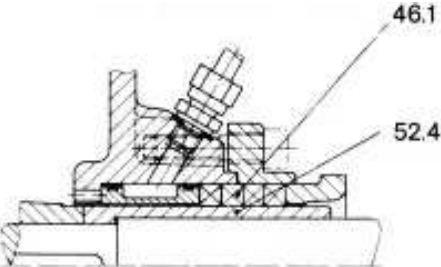

Soft packed stuffing box designed for intensive
cooling

Selection table

Values at n = 2900 rpm

H Head [m]	Q ► Capacity [m³/h]															
	6	8	10	12	15	20	25	30	35	40	45	50	60	70	80	
10		32125-0,75 0,8 0,6	32125-0,75 0,9 0,68	32125-1,1 1,1 0,74	32125-1,1 1,3 0,91	40125-1,1 1,4 0,96	40125-1,5 1,6 1,14	40125-2,2 2,0 1,5		50125-2,2 2,6 1,8	50125-3 2,8 1,9	50125-3 3,0 2,1				
12	32125-0,75 0,7 0,65	32125-1,1 0,8 0,69	32125-1,1 0,9 0,74	32125-1,5 1,1 0,82	40125-1,1 1,2 0,93	40125-1,5 1,4 1,09	40125-2,2 1,6 1,33	40125-2,2 2,0 1,63	50125-2,2 2,3 1,8	50125-3 2,6 2,0	50125-3 2,8 2,2	50125-3 3,0 2,4	50125-4 3,5 2,8	65125-5,5 2,3 4,1	65125-5,5 2,6 4,4	
14	32125-1,1 0,7 0,68	32125-1,1 0,8 0,75	32125-1,1 0,9 0,81	32125-1,1 1,1 0,9	32125-1,5 1,3 1,08	40125-1,5 1,4 1,25	40125-2,2 1,6 1,51	40125-2,2 2,0 1,82	50125-3 2,3 2,1	50125-3 2,6 2,3	50125-3 2,8 2,5	50125-3 3,0 2,6	50125-4 3,5 3,2	65125-5,5 2,3 4,1	65125-5,5 2,6 4,5	
16	32125-1,1 0,7 0,75	32125-1,1 0,8 0,83	32125-1,1 0,9 0,89	32125-1,5 1,1 0,99	32125-1,5 1,3 1,15	32125-2,2 1,9 1,66	40125-2,2 1,6 1,68	40125-3 2,0 2,0	50125-3 2,3 2,3	50125-3 2,6 2,6	50125-4 2,8 2,8	50125-4 3,0 3,0	50125-4 3,5 3,6	65125-5,5 4,2 4,4	65125-5,5 2,6 4,7	
18	32125-1,1 0,7 0,8	32125-1,1 0,8 0,91	32125-1,1 0,9 0,96	32125-1,5 1,1 1,05	32125-1,5 1,3 1,27	40125-2,2 1,4 1,57	40125-2,2 1,6 1,84	40125-3 2,0 2,2	40125-3 2,5 2,6	50125-4 2,6 2,84	50125-4 2,8 3,1	50125-4 3,0 3,3	50125-5,5 3,5 4,0	65125-5,5 4,2 4,8	65125-7,5 2,6 5,3	
20	32125-1,1 0,7 0,87	32125-1,5 0,8 0,97	32125-1,5 0,9 1,05	32125-1,5 1,1 1,14	32125-1,5 1,3 1,34	40125-2,2 1,4 1,73	40125-3 1,6 2,0	40125-3 2,0 2,4	40125-4 2,5 2,8	50125-4 2,6 3,2	50125-4 2,8 3,4	50125-4 3,0 3,6	50125-5,5 3,5 4,4	65125-7,5 4,2 5,3	65125-7,5 2,6 5,8	
22	32125-1,5 0,7 0,95	32125-1,5 0,8 1,04	32125-1,5 0,9 1,13	32125-1,5 1,1 1,24	40125-2,2 1,2 1,63	40125-2,2 1,4 1,87	40125-3 1,6 2,1	40125-3 2,0 2,6	40125-4 2,5 3,0	50125-4 2,6 3,5	50125-5,5 2,8 3,7	50125-5,5 3,0 4,0	50125-5,5 3,5 4,7	65125-7,5 4,2 5,7	65125-7,5 2,6 6,4	
24	32125-1,5 0,7 1,05	32125-1,5 0,8 1,14	32125-1,5 0,9 1,23	32160-2,2 1,2 1,67	40125-2,2 1,2 1,78	40125-3 1,4 2,0	40125-3 1,6 2,3	40125-3 2,0 2,7	50125-4 2,3 3,5	50125-5,5 2,6 3,8	50125-5,5 2,8 4,1	50125-5,5 3,0 4,4	50125-7,5 3,2 5,8	65125-7,5 2,3 6,4	65125-11 2,6 6,9	
26	32160-2,2 1,0 1,33	32160-2,2 1,0 1,42	32160-2,2 1,1 1,51	32160-2,2 1,2 1,77	40125-2,2 1,2 1,93	40160-3 1,6 2,6	40160-4 1,9 3,1	40160-4 2,4 3,5	40160-5,5 3,0 4,2	50125-5,5 2,6 4,2	50160-5,5 2,3 4,8	65125-7,5 1,8 5,9	50160-7,5 3,2 6,0	50160-11 3,9 7,3	50160-11 5,0 8,7	
28	32160-2,2 1,0 1,43	32160-2,2 1,0 1,53	32160-2,2 1,1 1,7	32160-2,2 1,2 1,91	32160-3 1,4 2,2	32160-4 2,2 2,8	40160-4 1,9 3,2	40160-5,5 2,4 3,8	40160-5,5 3,0 4,4	50160-5,5 2,1 4,7	50160-7,5 2,3 5,0	50160-7,5 2,6 5,5	50160-7,5 3,2 6,4	50160-11 3,9 7,7	50160-11 5,0 9,0	
30	32160-2,2 1,0 1,53	32160-2,2 1,0 1,63	32160-2,2 1,1 1,82	32160-3 1,2 2,0	32160-3 1,4 2,3	32160-4 2,2 3,1	40160-4 1,9 3,4	40160-5,5 2,4 3,9	40160-5,5 3,0 4,6	50160-5,5 2,1 4,9	50160-7,5 2,3 5,4	50160-7,5 2,6 5,8	50160-7,5 3,2 6,7	50160-11 3,9 8,0	50160-11 5,0 9,5	
32	32160-2,2 1,0 1,63	32160-2,2 1,0 1,74	32160-2,2 1,1 1,94	32160-3 1,2 2,1	32160-3 1,4 2,5	32160-4 2,2 3,2	40160-4 1,9 3,6	40160-5,5 2,4 4,2	50160-5,5 2,0 4,9	50160-7,5 2,1 5,3	50160-7,5 2,3 5,7	50160-7,5 2,6 6,1	50160-11 3,2 7,1	50160-11 3,9 8,5	65160-11 4,0 9,8	
34	32160-2,2 1,0 1,74	32160-2,2 1,0 1,85	32160-3 1,1 2,1	32160-3 1,2 2,3	32160-3 1,4 2,6	40160-4 1,6 3,4	40160-5,5 1,9 3,8	40160-5,5 2,4 4,4	50160-7,5 2,0 5,2	50160-7,5 2,1 5,6	50160-7,5 2,3 6,0	50160-7,5 2,6 6,5	50160-11 3,2 7,5	50160-11 3,9 8,8	65160-15 3,8 10,6	
36	32160-2,2 1,0 1,84	32160-3 1,1 1,96	32160-3 1,1 2,2	32160-3 1,2 2,4	32160-3 1,4 2,7	40160-4 1,6 3,5	40160-5,5 1,9 4,0	50160-7,5 1,8 5,1	50160-7,5 2,0 5,5	50160-7,5 2,1 5,8	50160-7,5 2,3 6,3	50160-7,5 2,6 6,8	50160-11 3,2 7,8	50160-11 3,9 9,2	65160-15 3,8 11,2	
38	32160-2,2 1,0 1,88	32160-3 1,1 2,07	32160-3 1,1 2,3	32160-3 1,2 2,5	32160-4 1,4 2,8	40160-5,5 1,6 3,7	50160-5,5 1,7 4,9	50160-7,5 1,8 5,4	50160-7,5 2,0 5,8	50160-7,5 2,1 6,2	50160-7,5 2,3 6,7	50160-11 2,6 7,1	50160-11 3,2 8,2	65160-15 3,3 10,8	65160-15 3,5 11,8	
40	32160-3 1,0 1,98	32160-3 1,0 2,18	32160-3 1,1 2,4	32160-3 1,2 2,6	32200-5,5 0,9 3,9	40200-5,5 1,5 4,2	50160-7,5 1,7 5,3	50160-7,5 1,8 5,7	50160-7,5 2,0 6,1	50160-7,5 2,1 6,5	50160-11 2,3 7,0	50160-11 2,6 7,5	50200-15 3,5 10,0	50200-15 4,4 12,1	65200-15 2,9 12,8	
45	32200-3 0,5 2,6	32200-4 0,6 2,9	32200-4 0,6 3,3	32200-4 0,7 3,6	32200-5,5 1,0 4,2	40200-5,5 1,4 4,7	40200-7,5 1,7 5,5	40200-7,5 2,1 6,6	40200-11 2,8 8,0	50200-11 2,2 7,7	50200-11 2,5 8,3	50200-11 2,8 9,1	50200-15 3,6 10,8	50200-15 4,3 13,1	65200-18,5 2,9 14,0	
50	32200-4 0,5 3,0	32200-4 0,6 3,3	32200-4 0,6 3,6	32200-5,5 0,7 3,9	32200-5,5 1,0 4,5	40200-7,5 1,4 5,1	40200-7,5 1,7 6,0	40200-11 2,1 7,2	50200-11 2,0 7,8	50200-11 2,2 8,5	50200-11 2,4 9,2	50200-11 2,7 9,9	50200-15 3,4 11,6	50200-18,5 4,0 14,0	65200-18,5 2,9 15,6	
55	32200-4 0,5 3,3	32200-5,5 0,6 3,7	32200-5,5 0,6 3,9	32200-5,5 0,7 4,3	32200-5,5 1,0 4,9	40200-7,5 1,4 5,7	40200-7,5 1,7 6,6	40200-11 2,1 7,9	50200-11 2,0 8,6	50200-11 2,2 9,4	50200-15 2,4 10,1	50200-15 2,7 10,8	50200-15 3,2 12,5	65200-18,5 2,6 15,7	65200-18,5 2,9 16,8	
60	32200-5,5 0,5 3,8	32200-5,5 0,6 4,1	32200-5,5 0,6 4,4	32200-5,5 0,7 4,7	40200-7,5 1,1 5,3	40200-7,5 1,4 6,2	50200-11 1,7 8,1	50200-11 1,8 8,8	50200-11 2,0 9,5	50200-15 2,2 10,3	50200-15 2,4 11,0	50200-15 2,6 11,8	65200-18,5 2,4 15,7	65200-22 2,6 17,1	65250-22 2,9 18,6	
65	32250-5,5 0,5 4,3	32250-7,5 1,6 6,7	32250-11 1,6 7,1	32250-11 1,7 7,5	32250-11 1,8 8,0	50200-11 1,5 8,0	50200-11 1,7 8,9	40250-15 1,8 12,7	50250-15 2,0 12,9	65200-18,5 2,1 15,0	65200-18,5 2,1 15,6	65200-18,5 2,2 16,1	65250-22 1,9 17,4	65250-22 2,3 19,4	65250-30 2,7 21,4	
70	32250-7,5 1,5 6,7	32250-11 1,6 7,3	32250-11 1,6 7,5	32250-11 1,7 7,9	32250-11 1,8 8,6	32250-15 2,0 10,3	40250-15 1,3 11,6	40250-15 1,6 13,3	50250-15 2,0 13,4	50250-18,5 2,2 14,7	50250-18,5 2,4 16,2	50250-22 2,7 17,8	65250-22 1,9 18,8	50250-30 4,1 24,3	65250-30 2,7 22,8	
75	32250-11 1,5 7,4	32250-11 1,6 7,6	32250-11 1,6 8,0	32250-11 1,7 8,5	32250-11 1,8 9,2	32250-15 2,0 10,7	40250-15 1,3 12,2	50250-15 1,8 12,8	40250-18,5 2,0 15,7	50250-18,5 2,2 15,4	50250-18,5 2,4 16,8	50250-22 2,7 18,6	50250-30 3,3 21,5	50250-30 4,1 25,1	65250-30 2,7 24,2	
80	32250-11 1,5 7,9	32250-11 1,6 8,1	32250-11 1,6 8,6	32250-11 1,7 9,0	32250-11 1,8 9,4	32250-15 2,0 11,7	40250-15 1,3 12,8	50250-15 1,8 13,4	50250-18,5 2,0 14,7	50250-18,5 2,2 16,2	50250-22 2,4 17,7	50250-22 2,7 19,2	50250-30 3,3 22,0	50250-30 4,1 25,9	65250-30 2,6 25,6	
85	32250-11 1,5 8,4	32250-11 1,6 8,6	32250-11 1,6 9,1	32250-11 1,7 9,4	32250-15 1,8 10,2	32250-15 2,0 12,8	40250-15 1,3 13,5	50250-18,5 1,6 15,3	50250-18,5 2,0 15,3	50250-18,5 2,2 16,8	50250-22 2,4 18,3	50250-22 2,7 19,7	50250-30 3,3 22,9	50250-30 4,1 26,8	65250-30 2,6 27,2	
90	32250-11 1,5 8,7	32250-11 1,6 9,1	32250-11 1,6 9,6	32250-11 1,7 9,9	32250-15 1,8 10,7	32250-15 2,0 12,9	40250-18,5 1,3 14,1	50250-18,5 1,8 15,2	50250-18,5 2,0 16,5	50250-22 2,2 17,8	50250-22 2,4 19,0	50250-30 2,7 20,4	50250-30 3,3 23,9	65250-30 2,2 26,4	65250-37 2,6 28,9	
95	32250-11 1,5 9,1	32250-11 1,6 9,6	32250-15 1,6 10,0	32250-15 1,7 10,5	32250-15 1,8 11,3	40250-15 1,1 13,1	50250-18,5 1,6 15,4	50250-18,5 1,8 16,2	50250-22 2,0 17,6	50250-22 2,2 18,8	50250-30 2,4 20,1	50250-30 2,7 21,6	50250-30 3,3 25,5	65250-37 2,2 28,3	65250-37 2,6 30,5	
100						50250-18,5 1,5 16,0	50250-22 1,6 17,0	50250-22 1,8 17,8	50250-22 2,0 19,1	50250-30 2,2 20,4	65250-30 1,6 24,5	65250-30 1,8 25,7	80250-37 2,4 33,7	80250-45 2,5 36,0	80250-45 3,0 38,2	
▲ H Head [m]	Q ► Capacity [m³/h]															
	6	8	10	12	15	20	25	30	35	40	45	50	60	70	80	

Example:

Required: capacity Q = 40 m³/h
head H = 30 m

In the Table the following is found:
Size NOW 50160
Motor rating 5.5 kW
NPSH 2.1 m
Power demand of pump 4.9 kW

NOW

Capacity [m³/h]															H Head [m]
90	100	125	150	175	200	225	250	275	300	325	350	400	500	600	▼
															10
65125-5.5 3.0 4.9															12
65125-7.5 3.0 5.1	65125-7.5 3.4 5.5														14
65125-7.5 3.0 5.3	65125-7.5 3.4 6.0	65125-11 4.7 8.1	80160-11 3.8 9.6			100160-18.5 7.5 14.6	100160-18.5 7.7 16.0	100160-22 8.4 18.5							16
65125-7.5 3.0 5.8	65125-7.5 3.4 6.5	65125-11 4.7 8.5	80160-15 3.8 10.5		100160-18.5 7 14.2	100160-18.5 7.3 16.1	100160-22 7.4 17.5	100160-30 7.9 20.7	100160-30 8.2 23.5						18
65125-7.5 3.0 6.4	65125-11 3.4 7.1	80160-11 3.4 9.5	80160-15 3.8 11.3	80160-15 4.5 13.6	100160-18.5 6.9 15.8	100160-22 7.1 17.1	100160-22 7.2 19.5	100160-30 7.7 22	100160-30 7.8 25.0						20
65125-11 3.0 7.0	65125-11 3.4 7.6	65160-15 5.1 11.2	80160-15 3.8 12.2	80160-18.5 4.5 14.6	100160-22 6.8 17.6	100160-22 6.9 18.9	100160-30 7.0 21.0	100160-30 7.5 23.5	100160-30 7.6 26.0	100160-37 7.7 29.5	125200-37 11.0 29.0	125200-37 12.9 33.0			22
65125-11 3.0 7.7	65160-11 4.4 9.2	65160-15 5.0 12.0	80160-15 3.8 13.0	80160-18.5 4.5 15.5	80160-22 5.3 18.7	100160-22 6.8 20.0	100160-30 6.9 22.5	100160-30 7.2 24.5	100160-30 7.3 27.0	100160-37 7.3 31.0	125200-37 10.5 31.0	125200-45 12.6 35.0			24
65160-11 4.0 8.9	65160-11 4.4 9.8	65160-15 5.0 12.6	80160-18.5 3.8 13.7	80160-18.5 4.5 16.4	80160-22 5.3 19.7	100160-30 6.8 21.6	100160-30 6.8 23.5	100160-30 7.1 25.5	100160-37 7.2 28.5	100160-37 7.3 33.0	125200-37 10.0 33.0	125200-45 11.2 37.0			26
65160-11 4.0 9.5	65160-15 4.3 10.5	65160-15 5.0 13.3	80160-18.5 3.8 14.5	80160-22 4.5 17.4	80160-22 5.3 20.5	100160-30 6.5 22.9	100160-30 6.6 24.5	100160-30 6.7 27.0	100160-37 7.0 30.0	125200-37 8.0 32.6	125200-45 9.5 34.2	125200-45 10.5 39.0			28
65160-15 3.8 10.2	65160-15 4.3 11.1	80160-15 3.4 13.2	80160-18.5 3.8 15.4	80160-22 4.5 18.4	100160-30 6.2 21.5	100160-30 6.3 24.0	100160-30 6.5 25.9	100160-37 6.6 28.5	100160-37 6.7 31.7	125200-37 8.0 34.0	125200-45 9.5 36.0	125200-45 10.0 41.0			30
65160-15 3.8 10.8	65160-15 4.2 11.9	80160-18.5 3.4 14.0	80160-18.5 3.8 16.4	80160-22 4.5 19.3	100160-30 5.9 23.1	100160-30 6.1 25.2	100160-30 6.3 27.8	100160-37 6.4 30.0	125200-37 8.5 34.0	100200-45 8.0 41.6	125200-45 8.7 38.0	125200-55 9.2 43.0	125200-75 13.0 56.0		32
65160-15 3.8 11.5	65160-15 4.1 12.6	80160-18.5 3.4 14.9	80160-22 3.8 17.4	80160-22 4.5 19.8	100160-30 5.8 24.5	100160-30 6.0 26.6	100160-37 6.2 28.9	100200-45 6.0 34.9	100200-45 6.9 38.4	100200-55 8.0 43.0	125200-45 8.2 40.0	125200-55 9.0 45.0	125200-75 12.5 58.0		34
65160-15 3.8 12.2	80160-18.5 3.2 13.6	80160-18.5 3.4 15.7	80160-22 3.8 18.2	100160-30 5.5 23.4	100160-30 5.7 25.5	100160-30 5.8 27.6	100200-37 5.2 32.5	100200-45 6.7 36.0	100200-45 6.8 40.3	100200-55 8.0 44.2	125200-55 8.0 42.0	125200-55 8.5 47.0	125200-75 12.0 61.0		36
65200-15 3.2 13.5	80160-18.5 3.2 14.4	80160-18.5 3.4 16.6	65200-30 5.8 25.5	100160-30 5.4 24.6	80200-30 5.8 26.7	100200-37 5.5 30.7	100200-37 5.8 33.8	100200-45 6.6 37.5	100200-55 6.6 41.4	100200-55 7.0 46.1	125200-55 7.7 44.0	125200-55 8.0 49.0	125200-75 11.8 63.0		38
80160-18.5 3.2 14.4	80160-18.5 3.2 15.1	65200-22 4.5 19.5	65200-30 5.8 26.0	80200-30 5.0 24.3	80200-37 5.8 27.8	80200-37 6.2 32.7	100200-45 5.8 35.4	100200-45 6.4 39.2	100200-55 6.5 43.0	100200-55 7.0 47.9	125200-55 7.5 46.0	125200-75 7.5 52.0	125200-75 11.5 66.0		40
65200-18.5 3.2 15.4	65200-18.5 3.5 16.8	65200-30 4.5 21.0	80200-30 4.2 23.5	80200-30 5.0 26.9	80200-37 5.8 30.8	80200-45 6.4 35.6	100200-45 5.8 39.2	100200-55 6.0 43.0	100200-55 6.0 47.2	100200-75 7.0 52.1	125200-75 6.7 51.1	125200-75 7.0 57.0			45
65200-18.5 3.2 16.8	65200-22 3.5 18.7	65200-30 4.5 23.2	80200-30 4.1 25.9	80200-37 4.8 29.7	80200-37 5.0 33.8	80200-45 6.4 39.0	100200-55 5.4 43.1	100200-55 5.7 46.8	100200-75 6.0 51.7	100200-75 7.0 55.1	125200-75 6.2 57.0	125200-75 6.5 63.0			50
65200-22 3.2 18.4	65200-22 3.5 19.8	80200-30 2.6 25.3	80200-37 4.0 28.6	80200-37 4.8 32.6	80200-45 5.4 37.1	100200-55 5.0 43.3	100200-55 5.0 47.4	100200-75 5.5 51.5	100250-75 6.2 63.8	100250-90 6.9 69.6					55
65200-22 3.2 20.0	80200-30 3.0 24.4	80200-37 3.5 28.0	80200-37 4.0 31.4	100200-45 4.0 40	100200-55 4.3 44.2	100250-55 5.1 50.5	100250-75 5.6 56.0	100250-75 5.9 61.6	100250-75 6.1 67.2	100250-90 6.8 74.1					60
65250-30 3.3 23.4	65250-30 3.9 25.7	65250-37 5.5 32.1	80250-45 4.8 35.4	80250-45 5.5 40.8	80250-55 6.7 47.5	100250-75 5.0 54.6	100250-75 5.5 59.8	100250-75 5.8 65.8	100250-90 6.0 71.8	100250-90 6.7 78.8					65
65250-30 3.3 24.9	65250-30 3.8 27.1	65250-37 5.4 33.5	80250-45 4.8 37.6	80250-55 5.5 43.6	80250-55 6.7 50.2	100250-75 4.9 58.4	100250-75 5.4 62.7	100250-90 5.7 69.0	100250-90 5.9 75.6	100250-90 6.6 82.7					70
65250-30 3.2 26.3	65250-37 3.7 28.8	65250-45 5.3 35.5	80250-45 4.7 40.3	80250-55 5.5 46.4	80250-75 6.7 53.4	100250-75 4.7 61.3	100250-75 5.2 66.9	100250-90 5.6 73.3	100250-90 5.8 80.4						75
65250-37 3.2 27.9	65250-37 3.6 30.3	65250-45 5.2 37.6	80250-55 7.1 47.4	80250-55 5.5 49.4	80250-75 6.7 56.6	100250-75 4.5 65.4	100250-90 5.0 71.0								80
65250-37 3.1 29.4	65250-37 3.6 32.0	65250-45 5.1 39.7	80250-55 4.7 48.0	80250-75 5.5 52.3	100250-75 4.2 63.5	100250-90 4.4 69.5									85
65250-37 3.0 31.1	65250-45 3.6 33.9	80250-55 4.0 42.6	80250-55 4.7 48.7												90
65250-37 3.0 32.8	65250-45 3.6 35.8	80250-55 4.0 45.3	80250-75 4.7 51.6												95
80250-45 3.1 39.6	80250-55 3.3 42.9														100
90	100	125	150	175	200	225	250	275	300	325	350	400	500	600	▲ H Head [m]
Capacity [m³/h]															▲ H Head [m]

Values apply to water with $\rho = 1$

NPSH data are measured values, a safety allowance of 0.5 m is necessary.

When ordering, please always quote capacity Q [m³/h] and head H [m].

Selection table

Values at n = 1450 rpm

H Head [m]	Q Capacity [m³/h]															
	4	6	8	10	12	15	20	25	30	35	40	45	50	60	70	80
3	32125-0.37 0.5 0.1	32125-0.37 0.6 0.11	32125-0.37 0.7 0.15	40125-0.37 0.7 0.18	40125-0.37 0.7 0.21	40125-0.37 0.8 0.27	50125-0.37 1.2 0.31	50125-0.55 1.4 0.34	50125-0.55 1.5 0.42	65125-0.75 1.1 0.51	65125-0.75 1.1 0.54	65125-0.75 1.2 0.61				
4	32125-0.37 0.5 0.1	32125-0.37 0.6 0.13	32125-0.37 0.7 0.16	32125-0.37 0.9 0.22	40125-0.37 0.7 0.25	40125-0.37 0.8 0.31	50125-0.55 1.2 0.35	50125-0.55 1.4 0.42	50125-0.75 1.5 0.50	50125-0.75 1.8 0.62	65125-0.75 1.1 0.67	65125-1.1 1.2 0.73	65125-1.1 1.3 0.81	65125-1.5 1.4 0.98	80160-1.5 0.9 1.27	
5	32125-0.37 0.5 0.12	32125-0.37 0.6 0.15	32125-0.37 0.7 0.19	40125-0.37 0.7 0.26	40125-0.37 0.7 0.29	40125-0.55 0.8 0.35	50125-0.55 1.2 0.43	50125-0.75 1.4 0.49	50125-0.75 1.5 0.58	50125-1.1 1.8 0.69	65125-1.1 1.1 0.77	65125-1.1 1.2 0.85	65125-1.1 1.3 0.92	65160-1.5 1.2 1.36	80160-2.2 0.9 1.38	80160-2.2 1.0 1.63
6	32125-0.37 0.5 0.15	32125-0.37 0.6 0.18	40125-0.37 0.6 0.28	40125-0.37 0.7 0.30	40125-0.55 0.7 0.34	40125-0.55 0.8 0.39	50125-0.75 1.2 0.50	50125-0.75 1.4 0.57	65125-1.1 1.1 0.78	65125-1.1 1.1 0.84	65125-1.1 1.1 0.92	65125-1.5 1.2 0.99	65160-1.5 1.1 1.21	80160-1.5 0.9 1.36	80160-2.2 0.9 1.58	80160-2.2 1.0 1.82
7	32160-0.37 0.5 0.17	32160-0.37 0.6 0.27	32160-0.55 0.7 0.32	32160-0.55 1.0 0.40	40160-0.55 0.8 0.42	40160-0.75 1.0 0.51	50160-0.75 1.0 0.66	50160-1.1 1.2 0.77	50160-1.1 1.4 0.89	50160-1.5 1.7 1.06	50160-1.5 2.0 1.27	65160-1.5 1.0 1.23	65160-1.5 1.1 1.35	65160-2.2 1.2 1.7	80160-2.2 0.9 1.77	80160-3 1.0 2.03
8	32160-0.37 0.5 0.27	32160-0.37 0.6 0.30	32160-0.55 0.7 0.35	32160-0.55 1.0 0.43	40160-0.55 0.8 0.47	40160-0.75 1.0 0.56	50160-1.1 1.0 0.75	50160-1.1 1.2 0.85	50160-1.5 1.4 0.98	50160-1.5 1.7 1.14	50160-1.5 2.0 1.34	65160-2.2 1.0 1.37	65160-2.2 1.1 1.5	65160-2.2 1.2 1.67	80160-3 0.9 2.01	80160-3 1.0 2.3
9	30160-0.37 0.5 0.31	30160-0.55 0.6 0.33	30160-0.55 0.7 0.38	40160-0.55 0.8 0.48	40160-0.75 0.8 0.53	50160-1.1 0.9 0.73	50160-1.1 1.0 0.82	50160-1.1 1.2 0.93	50160-1.5 1.4 1.05	50160-1.5 1.7 1.23	65160-2.2 1.0 1.40	65160-2.2 1.0 1.53	65160-2.2 1.1 1.66	80160-3 0.9 1.99	80160-3 0.9 2.30	80160-3 1.0 2.6
10	32160-0.55 0.5 0.34	32200-0.55 0.6 0.47	32200-0.75 0.7 0.54	40200-0.75 0.7 0.59	50160-1.1 1.0 0.76	50160-1.1 0.9 0.8	50160-1.1 1.0 0.91	50160-1.5 1.2 1.03	65160-1.5 0.9 1.3	50200-2.2 1.7 1.59	50200-2.2 1.8 1.90	80160-2.2 0.9 0.92	80160-3 0.9 2.00	80160-3 0.9 2.24	80200-3 1.7 2.89	80200-4 1.8 3.0
11	32200-0.55 0.5 0.40	32200-0.75 0.6 0.50	32200-0.75 0.7 0.59	40200-0.75 0.7 0.64	40200-1.1 0.7 0.72	40200-1.1 0.9 0.89	50200-1.5 1.3 1.03	50200-1.5 1.3 1.21	50200-2.2 1.5 1.43	50200-2.2 1.7 1.68	65200-2.2 1.4 1.80	65200-3 1.6 1.98	65200-3 1.7 2.14	65200-3 2.0 2.57	65200-3 2.3 3.23	80200-4 1.8 3.2
12	32200-0.55 0.5 0.44	32200-0.75 0.6 0.52	32200-0.75 0.7 0.62	30200-1.1 1.0 0.75	40200-1.1 0.7 0.77	40200-1.1 0.9 0.93	50200-1.5 1.3 1.11	50200-1.5 1.3 1.29	50200-2.2 1.5 1.50	50200-2.2 1.7 1.76	65200-2.2 1.4 1.95	65200-3 1.6 2.10	65200-3 1.7 2.30	65200-4 2.0 2.76	65200-4 2.3 3.44	80200-4 1.8 3.5
13	32200-0.75 0.5 0.47	32200-0.75 0.5 0.55	32200-1.1 0.7 0.66	30200-1.1 1.0 0.81	40200-1.1 0.7 0.83	40200-1.5 0.9 0.99	50200-1.5 1.3 1.18	50200-2.2 1.3 1.36	50200-2.2 1.5 1.59	50200-2.2 1.7 1.89	65200-3 1.4 2.08	65200-3 1.6 2.27	65200-3 1.7 2.46	65200-4 2.0 2.95	80200-4 1.7 3.35	80200-5.5 1.8 3.74
14	32200-0.75 0.5 0.51	32200-0.75 0.6 0.59	32200-1.1 0.7 0.71	40200-1.1 0.7 0.78	40200-1.1 0.7 0.88	50200-1.5 1.2 1.10	50200-1.5 1.3 1.27	50200-2.2 1.3 1.45	50200-2.2 1.5 1.68	65200-3 1.3 2.05	65200-3 1.4 2.24	65200-3 1.6 2.43	65200-3 1.7 2.63	65200-4 2.0 3.16	80200-4 1.7 3.60	80200-5.5 1.8 4.0
15	30200-0.75 0.5 0.54	30200-0.75 0.6 0.64	40200-1.1 0.6 0.76	40200-1.1 0.7 0.83	50200-1.5 1.4 1.10	50200-1.5 1.2 1.18	50200-2.2 1.3 1.36	65200-2.2 1.1 1.93	65200-3 1.2 2.04	65200-3 1.3 2.20	65200-3 1.4 2.40	65200-3 1.6 2.60	65200-4 1.7 2.82	80200-4 1.5 3.50	80200-5.5 1.7 3.87	80200-5.5 1.8 4.3
16	32200-0.75 0.5 0.58	32250-1.1 0.4 0.93	50200-1.5 1.2 1.10	50200-1.5 1.2 1.09	50200-1.5 1.4 1.16	65200-2.2 0.9 0.72	65200-2.2 1.0 1.86	65200-3 1.1 2.06	65200-3 1.2 2.18	65200-3 1.3 2.35	50250-4 2.0 3.42	80200-4 1.4 3.27	65250-4 1.3 3.26	65250-5.5 1.7 3.88	65250-5.5 2.3 4.55	80250-5.5 1.8 4.8
17	32250-1.1 0.4 0.84	32250-1.5 0.4 0.97	32250-1.5 0.5 1.11	32250-1.5 0.75 1.28	32250-2.2 1.1 1.34	40250-2.2 0.7 1.72	50250-2.2 1.0 1.85	50250-3 1.2 2.21	50250-3 1.4 2.62	65250-3 1.6 2.61	50250-4 2.0 3.53	65250-4 1.2 3.16	65250-4 1.3 3.43	65250-5.5 1.7 4.00	65250-5.5 2.3 4.73	80250-7.5 3.2 5.57
18	30250-1.1 0.4 0.88	30250-1.5 0.4 1.01	30250-1.5 0.5 1.14	32250-1.5 0.75 1.33	32250-2.2 1.1 1.54	40250-2.2 0.7 1.79	50250-3 1.0 1.94	50250-3 1.2 2.3	50250-3 1.4 2.68	50250-4 1.7 3.12	65250-4 1.1 3.07	65250-4 1.2 3.32	65250-4 1.3 3.60	65250-5.5 1.7 4.2	65250-5.5 2.3 4.90	80250-7.5 3.2 5.8
19	32250-1.1 0.4 0.93	32250-1.5 0.4 1.04	32250-1.5 0.5 1.18	32250-2.2 0.75 1.38	32250-2.2 1.1 1.67	40250-2.2 0.7 1.85	50250-3 1.0 2.02	50250-3 1.2 2.40	50250-4 1.4 2.80	50250-4 1.7 3.20	65250-4 1.1 3.20	65250-4 1.2 3.50	65250-5.5 1.4 3.70	65250-5.5 1.8 4.40	65250-7.5 2.4 5.10	80250-7.5 3.2 6.1
20	32250-1.5 0.4 0.98	32250-1.5 0.4 1.09	32250-1.5 0.5 1.22	32250-2.2 0.75 1.42	32250-2.2 1.1 1.71	40250-2.2 0.7 1.95	50250-3 1.0 2.10	50250-3 1.2 2.50	50250-4 1.4 2.80	50250-4 1.7 3.30	65250-4 1.1 3.40	65250-4 1.2 3.60	65250-5.5 1.4 3.80	65250-5.5 1.8 4.60	65250-7.5 2.4 5.40	80250-7.5 1.5 5.9
22	32250-1.5 0.4 1.08	32250-1.5 0.4 1.18	32250-1.5 0.5 1.34	32250-2.2 0.75 1.56	40250-2.2 0.6 1.75	50250-3 0.9 2.0	50250-3 1.0 2.3	50250-3 1.2 2.6	50250-4 1.4 3.1	50250-4 1.7 3.6	65250-4 1.1 3.6	65250-5.5 1.2 4.0	65250-5.5 1.4 4.3	65250-5.5 1.8 4.9	80250-7.5 1.3 6.0	80250-7.5 1.5 6.6
24	32250-1.5 0.4 1.18	32250-1.5 0.4 1.28	40250-2.2 0.5 1.52	50250-2.2 0.8 1.98	50250-3 0.8 2.07	50250-3 0.9 2.2	50250-3 1.0 2.5	50250-3 1.2 2.8	65250-4 1.0 3.4	50315-5.5 1.3 4.5	65250-5.5 1.1 4.1	65250-5.5 1.2 4.4	65250-5.5 1.4 4.6	80250-7.5 1.2 5.9	80250-7.5 1.3 6.5	65315-11 1.0 9.2
26	40315-2.2 0.9 1.65	40315-2.2 0.9 1.9	40315-3 0.9 2.05	40315-3 1.0 2.25	40315-3 1.1 2.45	40315-4 1.2 2.95	50315-4 1.0 3.4	50315-5.5 1.1 3.75	50315-5.5 1.3 4.8	50315-5.5 1.5 6.35	65315-5.5 0.7 4.9	65315-7.5 1.5 6.35	65315-7.5 0.9 5.9	65315-11 1.1 6.9	65315-11 1.5 8.1	65315-11 1.8 9.6
28	40315-2.2 0.9 1.75	40315-3 0.9 2.10	40315-3 0.9 2.2	40315-3 1.0 2.35	40315-3 1.1 2.6	40315-4 1.2 3.1	50315-4 1.0 3.6	50315-5.5 1.1 3.9	50315-5.5 1.3 5.0	50315-5.5 1.5 6.65	65315-5.5 1.4 5.75	65315-7.5 1.5 6.65	65315-7.5 0.9 6.3	65315-11 1.1 7.3	65315-11 1.5 8.6	80315-11 1.0 9.5
30	40315-2.2 0.9 1.98	40315-3 0.9 2.15	40315-3 0.9 2.35	40315-3 1.0 2.55	40315-4 1.1 2.75	40315-4 1.2 3.25	50315-5.5 1.0 3.8	50315-5.5 1.1 4.15	50315-5.5 1.3 5.3	50315-7.5 1.4 6.0	65315-7.5 0.7 6.3	65315-7.5 0.9 6.7	65315-11 1.1 7.8	65315-11 1.5 9.1	80315-11 1.0 9.5	
32	40315-3 0.9 2.14	40315-3 0.9 2.35	40315-3 0.9 2.5	40315-4 1.0 2.75	40315-4 1.1 2.95	40315-4 1.2 3.45	50315-5.5 1.0 4.0	50315-5.5 1.1 4.35	50315-5.5 1.3 5.5	50315-7.5 1.4 6.3	65315-7.5 0.8 6.6	65315-11 0.9 7.2	65315-11 1.1 8.2	65315-11 1.5 9.7	80315-15 1.0 10.0	
34	40315-3 0.9 2.2	40315-3 0.9 2.5	40315-4 0.9 2.7	40315-4 1.0 2.9	40315-4 1.1 3.15	40315-5.5 1.2 3.65	50315-5.5 1.0 4.25	50315-5.5 1.1 4.65	50315-7.5 1.1 5.1	50315-7.5 1.3 5.8	65315-7.5 0.7 6.6	65315-11 0.8 7.1	65315-11 0.9 7.8	65315-11 1.1 8.8	80315-15 0.9 9.5	80315-15 1.0 10.5
36	40315-3 0.9 2.4	40315-3 0.9 2.65	40315-4 0.9 2.85	40315-4 1.0 3.05	40315-4 1.1 3.3	50315-5.5 0.9 4.1	50315-5.5 1.0 4.5	50315-5.5 1.1 4.85	50315-7.5 1.1 5.4	65315-7.5 0.6 6.5	65315-11 0.7 7.0	65315-11 0.8 7.5	65315-11 0.9 8.0	80315-11 0.8 9.2	80315-15 0.9 10.1	100315-15 1.0 11.5
38	40315-3 0.9 2.55	40315-4 0.9 2.8	40315-4 0.9 3.0		65315-7.5 0.4 5.2	65315-7.5 0.4 5.3	65315-7.5 0.4 5.7	65315-7.5 0.5 6.1	65315-7.5 0.5 6.5	80400-11 0.6 7.5	80400-11 0.6 8.0	80400-11 0.7 8.7	80400-11 0.7 9.2	80400-15 0.8 10.7	80400-15 0.9 12.3	80400-18.5 1.1 14.0
40									80400-11 0.6 7.6	80400-11 0.6 8.1	80400-11 0.6 8.5	80400-11 0.7 9.3	80400-11 0.7 9.7	80400-15 0.8 11.2	80400-15 0.9 12.9	80400-18.5 1.1 14.6
45									80400-11 0.6 8.8	80400-11 0.6 9.3	80400-11 0.6 9.8	80400-15 0.7 10.4	80400-15 0.7 11.1	80400-15 0.8 12.6	80400-18.5 0.9 14.3	80400-18.5 1.1 16.1
50									80400-15 0.6 10	80400-15 0.6 10.4	80400-15 0.6 11.1	80400-15 0.7 11.8	80400-15 0.7 12.5	80400-18.5 0.8 14.1	80400-18.5 0.9 15.8	80400-22 1.1 17.8
55									80400-15 0.6 11.2	80400-15 0.6 11.9	80400-15 0.6 12.5	80400-15 1.7 13.2	80400-18.5 0.7 14.0	80400-18.5 0.8 15.7	80400-22 0.9 17.5	80400-22 1.1 19.2
60									80400-15 0.6 12.6	80400-15 0.6 13.3	80400-18.5 0.6 14.2	80400-18.5 0.7 14.7	80400-18.5 0.7 15.7	80400-22 0.8 17.4	80400-22 0.9 19.3	100400-30 0.9 23.0
H Head [m]	Q Capacity [m³/h]															
	4	6	8	10	12	15	20	25	30	35	40	45	50	60	70	80

Example:
Required: capacity Q = 70 m³/h
head H = 20 m



In the Table the following is found:
Size NOW 65250
Motor rating 7.5 kW
NPSH 2.4 m
Power demand of pump 5.4 kW

Capacity [m³/h]															H Head [m]
100	125	150	175	200	225	250	275	300	350	400	450	500	600	700	
		100160-2,2 2,9 1,95	100160-3 3,8 2,5	100160-4 4,5 3,0											3
	100160-2,2 2,3 1,95	100160-3 2,8 2,4	100160-4 3,4 2,85	100160-4 3,9 3,6	125200-5,5 5,2 4,0	125200-5,5 6,4 4,7									4
100160-2,2 1,9 1,9	100160-3 2,2 2,3	100160-3 2,7 2,7	100160-4 3,0 3,3	100160-5,5 3,5 4,1	125200-5,5 4,6 4,5	125200-7,5 5,6 5,3	125200-7,5 6,5 6,3		150200-11 2,7 7,0			200250-11 3,6 9,9	200250-15 4,0 12,2		5
80160-3 1,2 2,6	100160-3 2,1 2,6	100160-3 2,3 3,1	100160-5,5 2,7 3,9	125200-5,5 3,4 4,6	125200-7,5 3,8 5,2	125200-7,5 4,7 5,8	125200-7,5 5,4 6,8	150200-7,5 2,2 6,5	150200-11 2,7 8,0	150200-11 3,8 9,6	200250-15 3,5 10,2	200250-15 3,6 11,2	200250-15 4,0 13,3		6
100160-3 1,8 2,5	100160-4 1,9 2,9	100160-4 2,2 3,6	125200-5,5 2,7 4,5	125200-7,5 2,9 5,1	125200-7,5 3,3 5,7	125200-7,5 3,9 6,4	125200-11 4,5 7,3	150200-11 2,2 7,4	150200-11 2,7 9,25	150200-15 3,8 10,5	200250-15 3,5 11,5	200250-15 3,6 12,6	200250-18,5 4,0 15,0		7
80200-4 2,3 3,2	100160-4 1,8 3,4	100160-5,5 2,0 4,0	100200-7,5 2,2 5,9	125200-7,5 2,6 5,6	125200-7,5 2,9 6,2	125200-11 3,4 6,9	125200-11 3,9 8,2	150200-11 2,2 8,25	150200-11 2,7 9,75	150200-15 3,8 11,5	200250-15 3,5 12,7	200250-18,5 3,6 13,9	200250-18,5 4,0 16,5	200250-22 4,8 19,8	8
80200-4 2,3 3,45	80200-5,5 3,2 4,5	100200-7,5 2,3 5,07	100200-7,5 2,5 6,1	125200-7,5 2,5 6,0	125200-7,5 2,6 6,8	125200-11 3,0 7,6	125200-11 3,6 8,7	150200-11 2,2 9,0	150200-15 2,7 10,5	150200-15 3,8 12,3	200250-18,5 3,5 14,0	200250-18,5 3,6 15,5	200250-22 4,0 18,2	200250-30 4,8 21,8	9
80200-5,5 2,3 3,7	80200-5,5 3,2 4,87	100200-7,5 2,1 5,5	100200-7,5 2,4 6,6	125200-7,5 2,1 6,4	125200-11 2,4 7,4	125200-11 2,8 8,2	150200-11 2,2 9,1	150200-11 2,2 9,75	150200-15 2,7 11,4	150250-18,5 4,7 16,0	150250-22 5,5 18,0	200250-18,5 3,6 16,8	200250-22 4,0 19,8	200250-30 4,8 23,8	10
80200-5,5 2,3 4,0	100200-5,5 1,8 4,8	100200-7,5 2,0 5,8	100200-11 2,3 7,0	125200-11 2,0 7,0	125200-11 2,3 7,8	150200-11 2,0 9,3	150200-15 2,2 10,2	150200-15 2,2 10,8	150200-15 2,7 12,2	150250-22 4,5 16,5	150250-22 5,2 19,0	200250-22 3,6 18,2	200250-30 4,0 21,4	200250-30 4,8 25,6	11
80200-5,5 2,3 4,3	100200-7,5 1,7 5,1	100200-7,5 1,9 6,1	100200-11 2,3 7,4	125200-11 1,9 7,5	150200-11 2,0 9,7	150200-15 2,0 10,5	150200-15 2,2 10,5	150200-15 2,2 10,8	150250-18,5 3,6 14,7	150250-22 5,0 17,5	150250-30 5,0 21,8	200250-22 3,6 19,7	200250-30 4,0 23,6	200250-30 4,8 27,5	12
80200-5,5 2,3 4,5	100200-7,5 1,7 5,5	100200-7,5 1,9 6,5	125200-11 1,5 7,4	150200-11 2,0 9,5	150200-15 2,0 10,3	150200-15 2,0 11,1	150250-15 3,0 14,5	150250-15 3,0 15,3	150250-18,5 4,0 16,5	150250-22 4,9 18,3	150250-30 4,9 22,0	200250-30 3,6 21,2	200250-30 4,0 24,7		13
100200-7,5 1,5 5,0	100200-7,5 1,7 5,9	100250-11 2,4 8,2	125250-11 1,5 8,4	125250-11 1,7 9,4	125250-15 1,9 10,7	125250-15 2,1 12,3	125250-15 2,4 13,7	125250-18,5 2,7 15,8	150250-18,5 3,1 16,9	150250-22 3,9 20,0	150250-30 4,7 23,0	200250-30 3,6 22,7	200250-30 4,0 26,3		14
100200-7,5 1,5 5,45	80250-11 2,3 8,2	100250-11 2,4 8,6	125250-11 1,5 8,9	125250-15 1,7 10,0	125250-15 1,9 11,3	125250-15 2,1 12,9	125250-18,5 2,9 16,4	125250-18,5 3,0 17,5	150250-22 3,6 21,5	150250-30 4,5 24,0		200250-30 3,6 24,3			15
80250-7,5 1,8 6,2	80250-11 2,3 8,5	100250-11 2,4 9,1	125250-11 2,0 9,4	125250-15 2,3 10,5	125250-15 2,6 11,8	125250-15 2,8 13,4	125250-18,5 2,8 15,2	125250-22 2,7 17,1	150250-22 2,9 19,0	150250-30 3,5 22,0					16
80250-7,5 1,8 6,5	80250-11 2,3 8,8	100250-11 2,4 9,5	100250-15 1,9 11,3	125250-15 2,2 11,1	125250-15 2,3 12,5	125250-18,5 2,4 14,0	125250-18,5 2,6 15,9	150250-22 2,5 17,5	150250-22 2,8 20,0	150250-30 3,3 22,8					17
80250-7,5 1,8 6,7	100250-11 1,8 8,2	125250-11 1,7 9,6	100250-15 1,8 11,9	125250-14 2,1 11,8	125250-15 2,1 13,1	125250-18,5 2,2 14,7	125250-18,5 2,4 16,6	150250-22 2,4 18,1	150250-30 2,8 20,8	150250-30 3,2 23,8					18
80250-11 1,8 7,1	100250-11 1,8 8,6	100250-15 2,1 10,2	100250-15 2,5 12,4	125250-15 2,0 12,4	125250-18,5 2,1 13,7	125250-18,5 2,1 15,3	150250-22 2,3 17,6	150250-22 2,4 18,9	150250-30 2,6 21,8						19
80250-11 1,8 7,4	100250-11 1,8 8,9	100250-15 2,1 10,7	100250-15 2,5 12,9	125250-15 1,9 13,1	125250-18,5 1,9 14,4	125250-18,5 2,1 16,1	150250-22 2,2 18,3	150250-22 2,3 19,5	150250-30 2,5 22,7						20
100250-11 1,5 8,4	100250-11 1,8 9,9	100250-15 2,1 11,5	125250-15 1,6 13,1	125250-18,5 1,7 14,4	125315-22 1,8 17,3	125315-22 2,0 19,8	150250-30 2,1 20,3	150315-30 2,5 22,5	150315-30 2,6 26,7	150315-37 2,8 30,9					22
100250-11 1,5 9,3	100250-15 1,8 10,8	125315-15 1,5 13,5	125315-18,5 1,5 14,4	125315-18,5 1,7 16,4	125315-22 1,8 18,5	125315-30 2,0 21,0	150315-30 2,4 22,4	150315-30 2,5 24,3	150315-37 2,6 28,4	150315-37 2,8 32,9	150315-45 2,8 39,2				24
80315-15 1,3 10,5	80315-15 1,7 13,5	100315-18,5 1,5 14,7	125315-18,5 1,5 15,3	125315-22 1,8 17,3	125315-22 1,8 19,6	125315-30 2,0 22,1	150315-30 2,4 24,1	150315-30 2,5 26,1	150315-37 2,6 30,3	150315-45 2,8 34,9	150315-55 2,8 41,7				26
80315-15 1,3 10,9	100315-15 1,6 12,9	100315-18,5 1,7 15,4	125315-22 1,5 16,3	125315-22 1,7 18,0	125315-30 1,8 20,7	125315-30 2,0 23,3	150315-30 2,4 25,9	150315-37 2,5 27,9	150315-37 2,6 32,2	150315-45 2,8 37,1	150315-55 2,8 43,9				28
80315-15 1,3 11,5	100315-15 1,6 13,5	100315-18,5 1,7 16,2	125315-22 1,5 17,4	125315-22 1,7 19,4	125315-30 1,8 21,8	125315-30 2,0 24,5	150315-37 2,4 27,6	150315-37 2,5 29,7	150315-45 2,6 34,2	150315-45 2,8 39,3	150315-55 2,8 45,0				30
80315-15 1,3 11,9	100315-18,5 1,6 14,3	100315-22 1,7 17,2	125315-22 1,5 18,6	125315-30 1,7 20,6	125315-30 1,8 23,0	125315-30 2,0 25,8	150315-37 2,4 29,4	150315-37 2,5 31,7	150315-45 2,6 36,3	150315-55 2,8 41,5	150400-75 2,9 54,9				32
100315-15 1,2 12,5	100315-18,5 1,6 15,0	125315-22 1,4 17,9	125315-22 1,5 19,8	125315-30 1,7 21,9	125315-30 1,8 24,4	125400-37 2,2 31,3	150315-37 2,4 31,4	125400-45 2,8 40,1	150315-45 2,6 38,4	150400-55 2,5 47,8	150400-75 2,9 56,2				34
100315-15 1,2 13,3	100400-22 1,2 19,3	100400-30 1,4 23,0	125315-22 1,5 21,0	125315-30 1,7 23,3	125400-37 1,9 29,0	125400-37 2,2 32,8	150315-37 2,4 33,1	150315-45 2,5 35,7	150400-55 2,2 43,2	150400-75 2,5 49,9	150400-75 2,9 58,5				36
100400-18,5 1,0 16,4	100400-30 1,2 19,9	100400-30 1,4 24,0	125400-30 1,5 23,8	125400-30 1,7 26,9	125400-37 1,9 30,5	125400-45 2,2 34,4	125400-45 2,4 38,7	150400-45 2,0 39,1	150400-55 2,2 45,2	150400-75 2,5 52,2	150400-75 2,9 60,7				38
80400-22 1,3 18,6	100400-30 1,2 20,6	100400-30 1,4 24,9	125400-30 1,5 25,0	125400-37 1,7 28,3	125400-37 1,9 32,0	125400-45 2,2 35,9	150400-45 1,9 38,9	125400-55 2,8 45,7	150400-55 2,2 47,4	150400-75 2,5 54,5	150400-75 2,9 63,1				40
100400-22 1,0 18,9	100400-30 1,2 22,5	100400-30 1,4 27,0	100400-37 1,6 32,3	125400-37 1,7 31,9	125400-45 1,9 35,7	125400-45 2,2 40,0	125400-55 2,4 44,8	150400-55 2,0 45,9	150400-75 2,2 52,9	150400-75 2,5 60,9	150400-90 2,9 63,3				45
80400-30 1,3 21,8	100400-30 1,2 24,7	100400-37 1,4 29,2	125400-37 1,5 31,8	125400-45 1,7 35,6	125400-47 1,9 39,6	125400-55 2,2 44,1	125400-55 2,4 49,4	150400-75 2,0 51,0	150400-75 2,2 58,5	150400-75 2,5 67,0					50
100400-30 1,0 23,0	100400-30 1,2 27,0	125400-37 1,2 32,0	125400-45 1,5 35,4	125400-45 1,7 39,9	125400-55 1,9 43,7	150400-55 1,8 49,3	150400-75 1,8 54,0	150400-75 2,0 56,5							55
															60
100	125	150	175	200	225	250	275	300	350	400	450	500	600	700	H Head [m]

Values apply to water with $\rho = 1$

NPSH data are measured values, a safety allowance of 0.5 m is necessary.

When ordering please always quote capacity Q [m³/h] and head H [m].



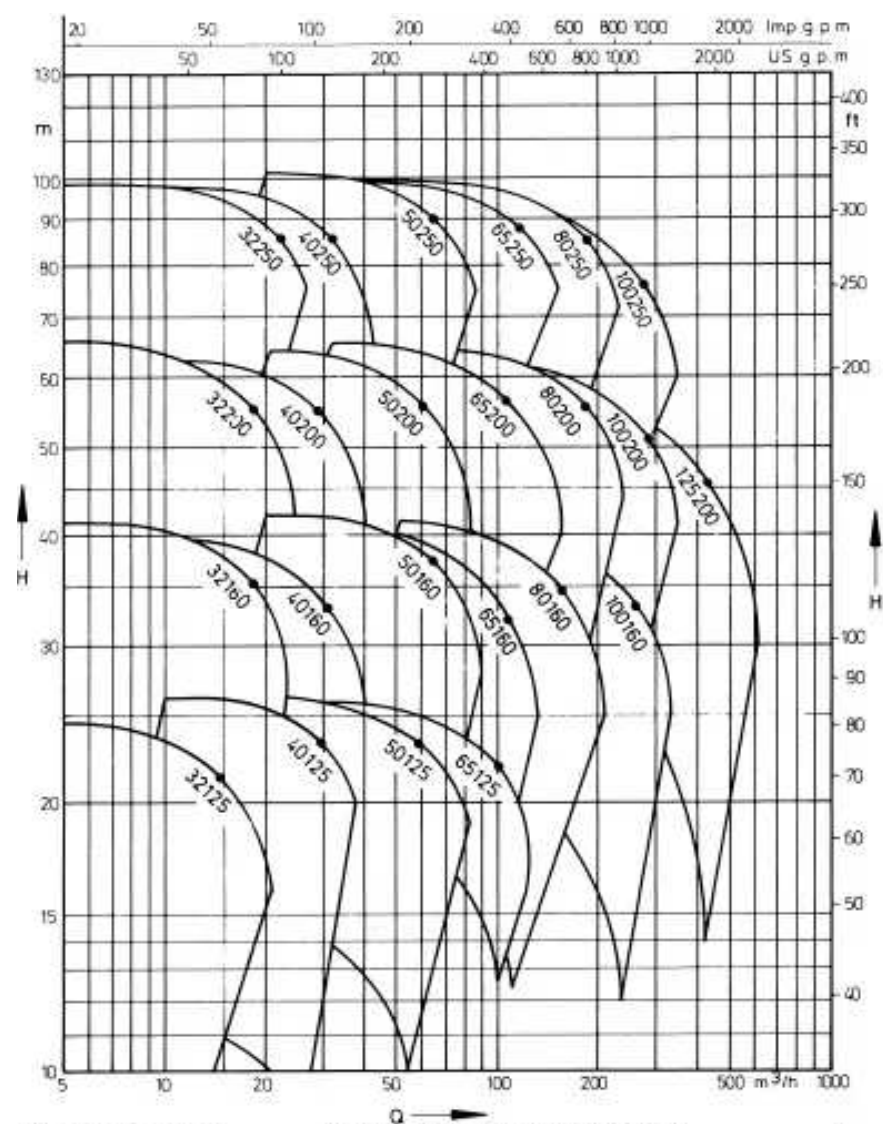
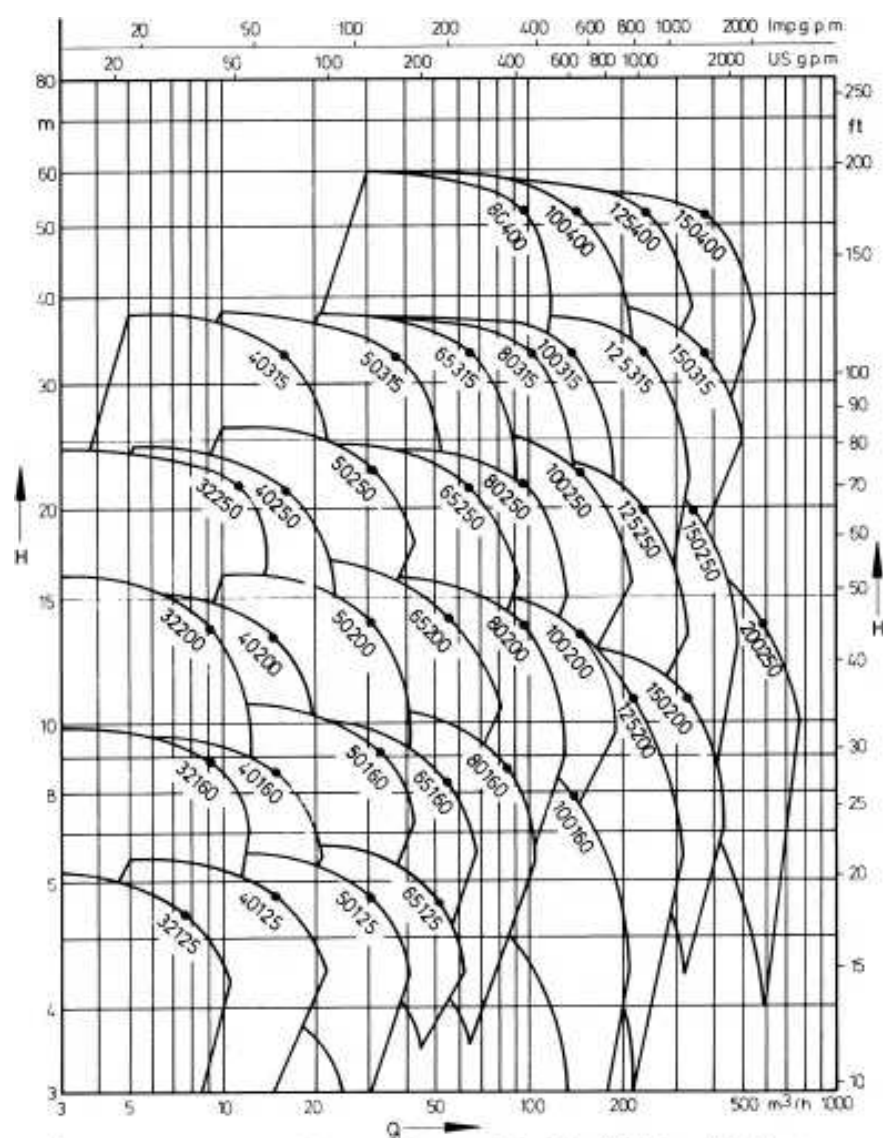

$$n =$$


$n = 1450 \text{ 1/min}$



NOW

Performance curves

n = 2900 rpm

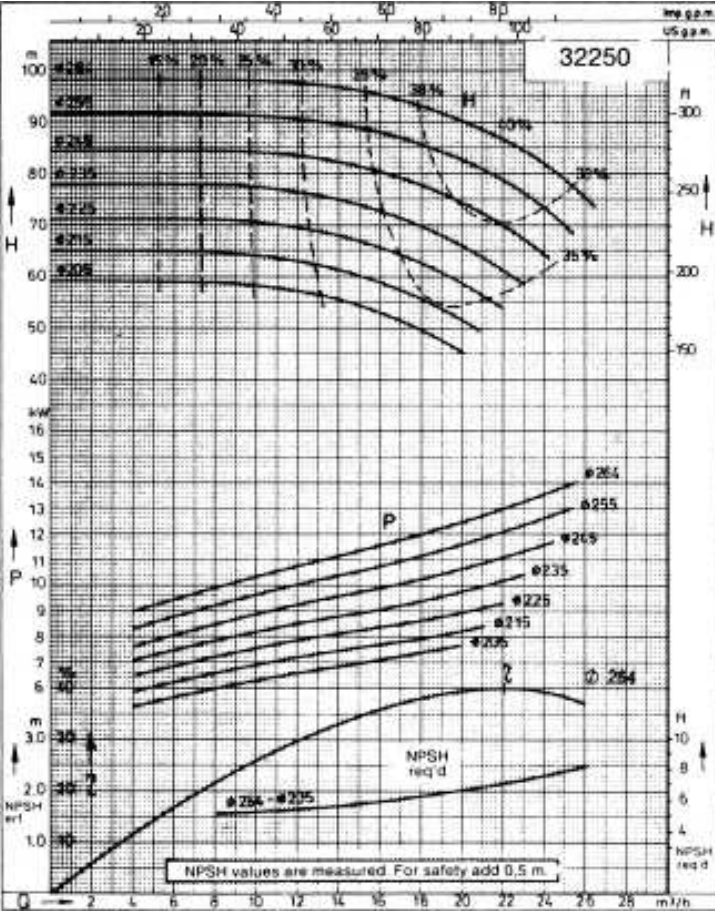
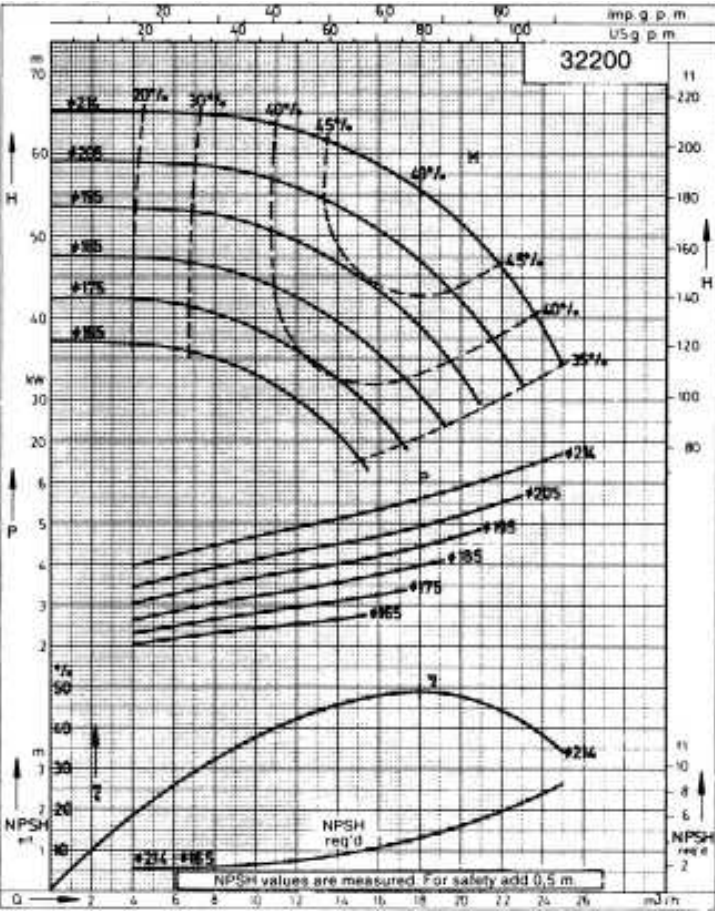
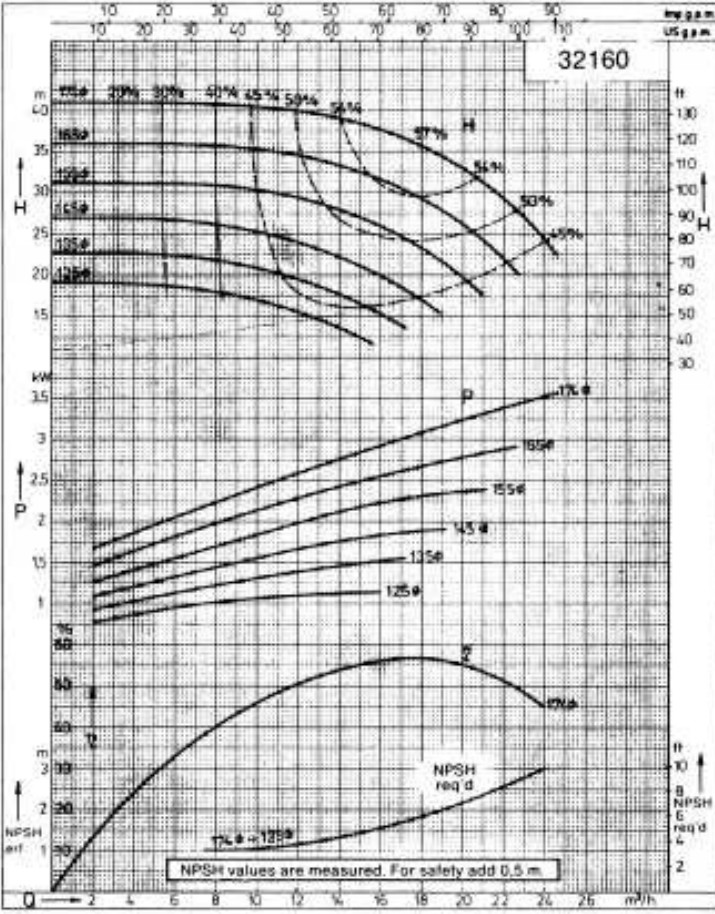
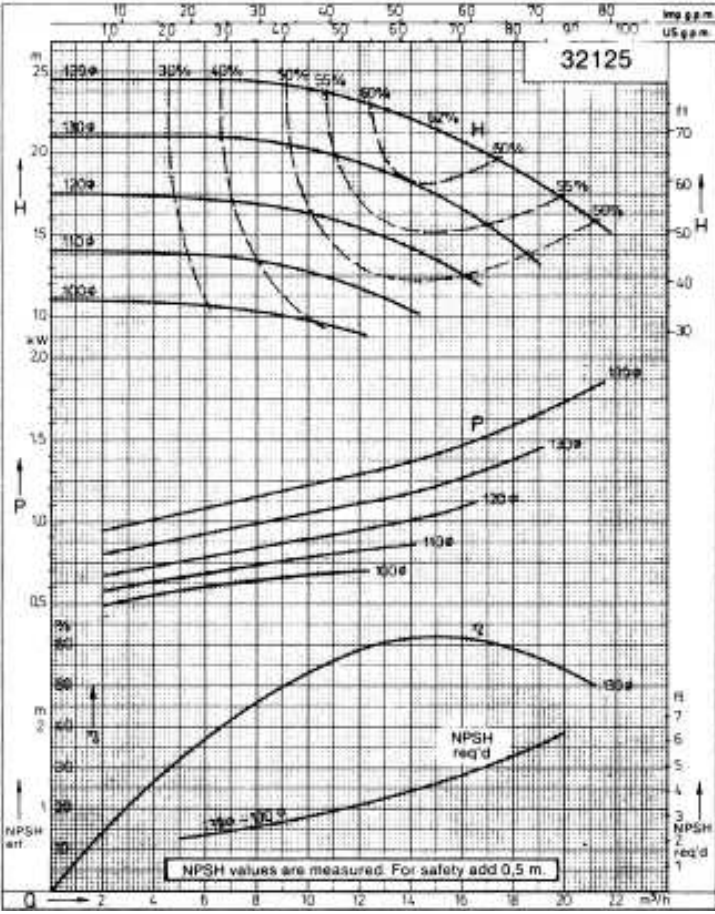


$n = 2900$ rpm

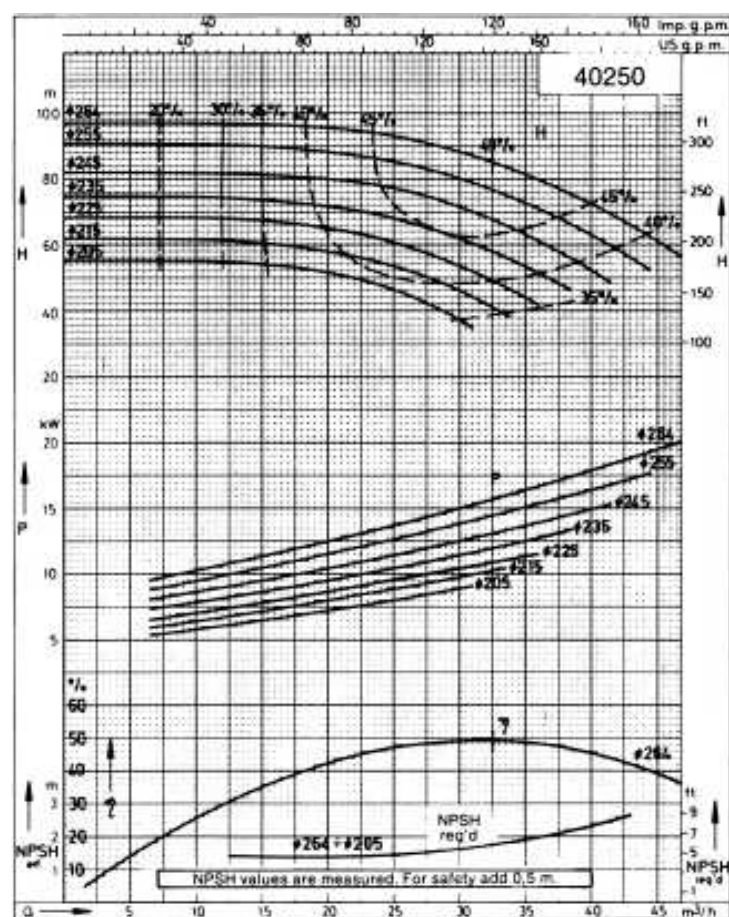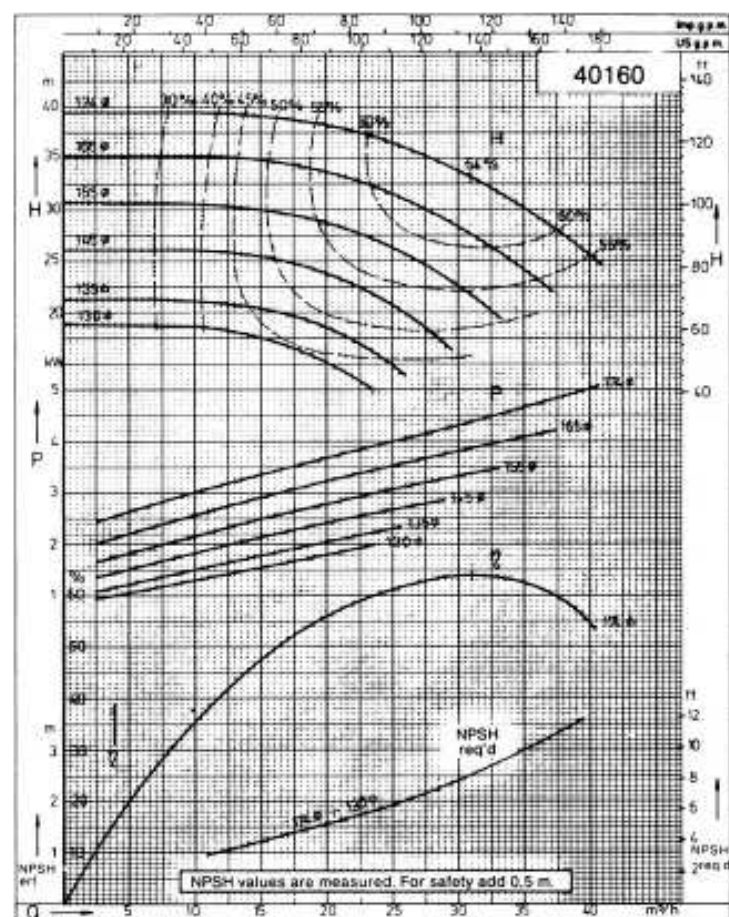

Performance curves


$n = 2900$ rpm

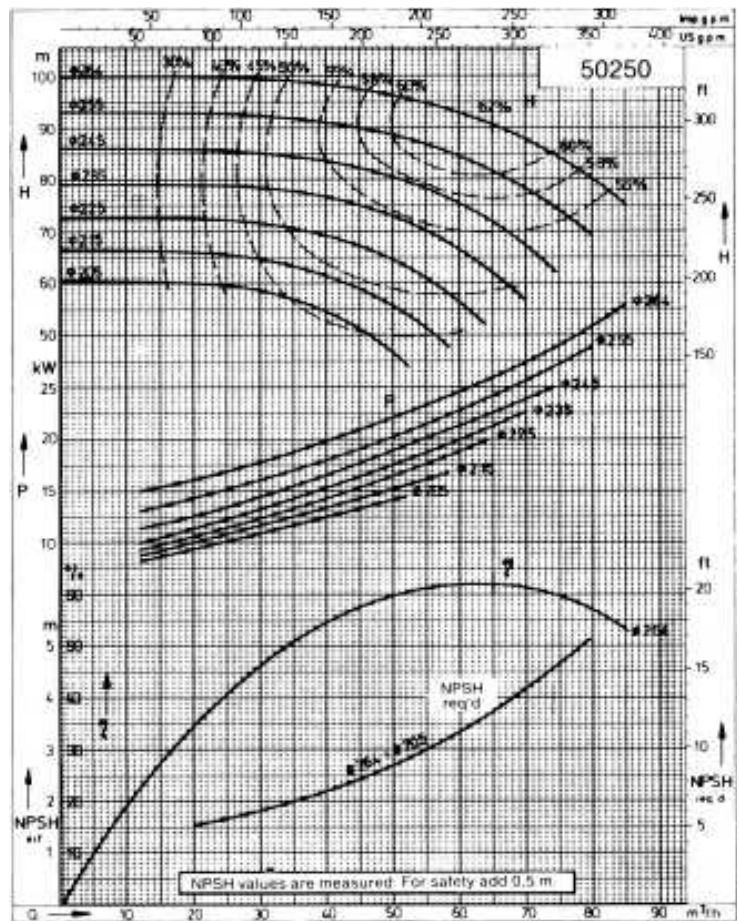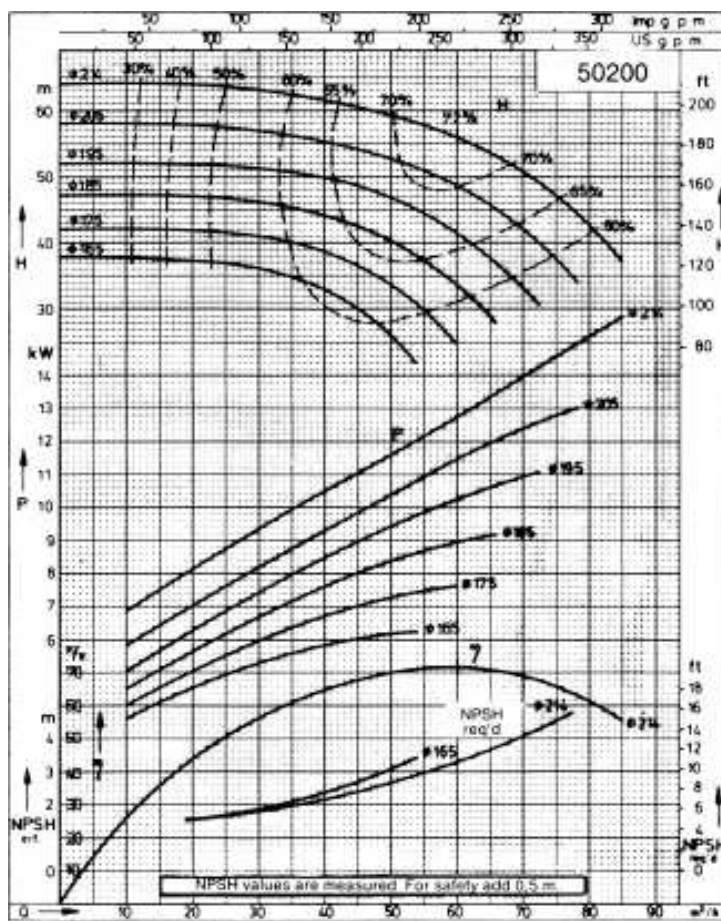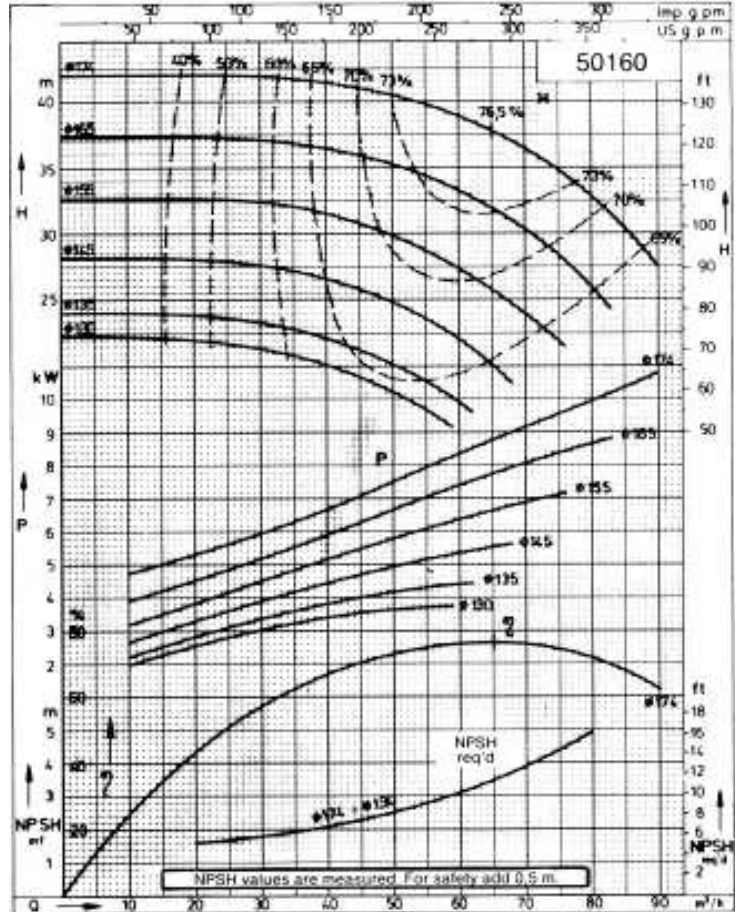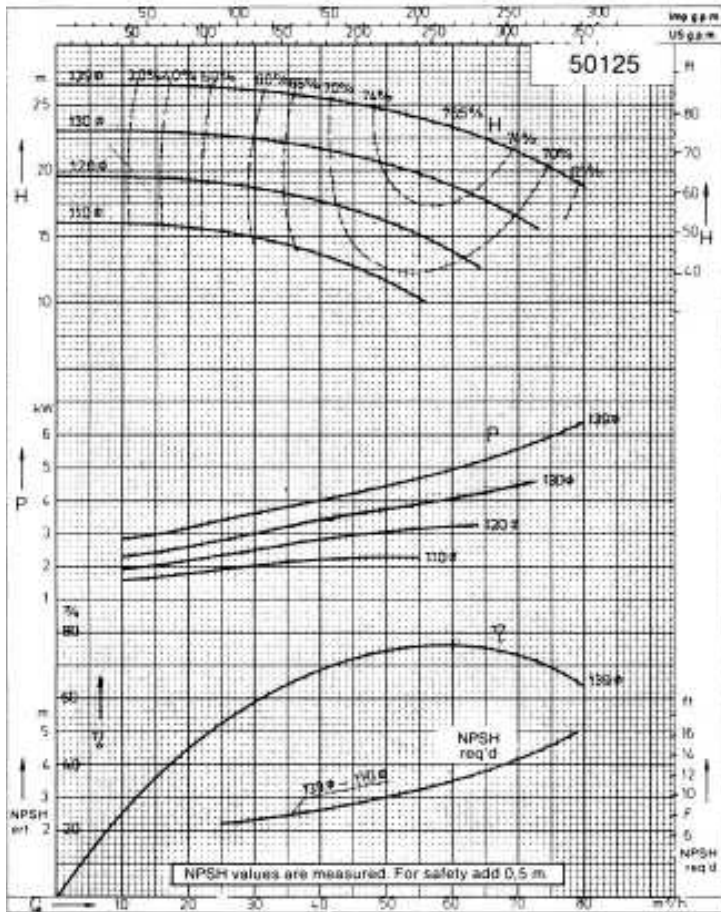





NOW

Performance curves



$n = 2900 \text{ rpm}$

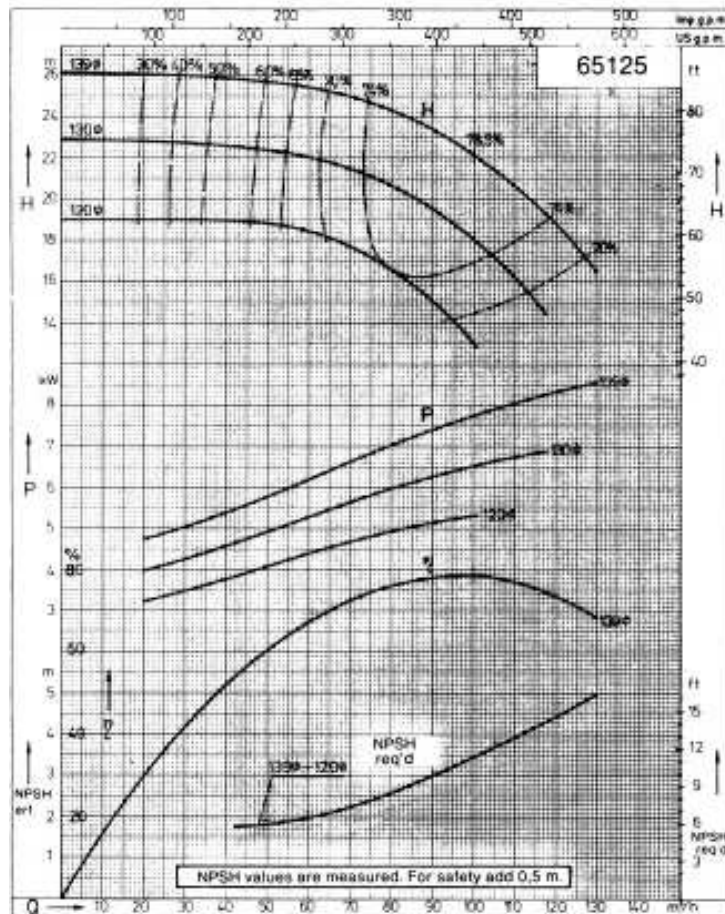

$n = 2900$ rpm

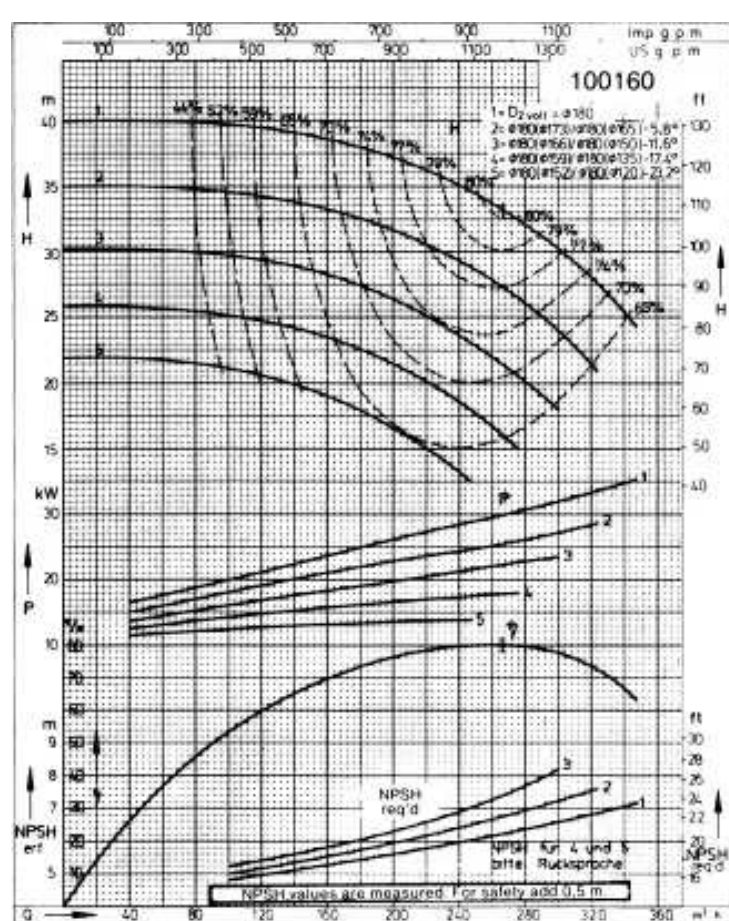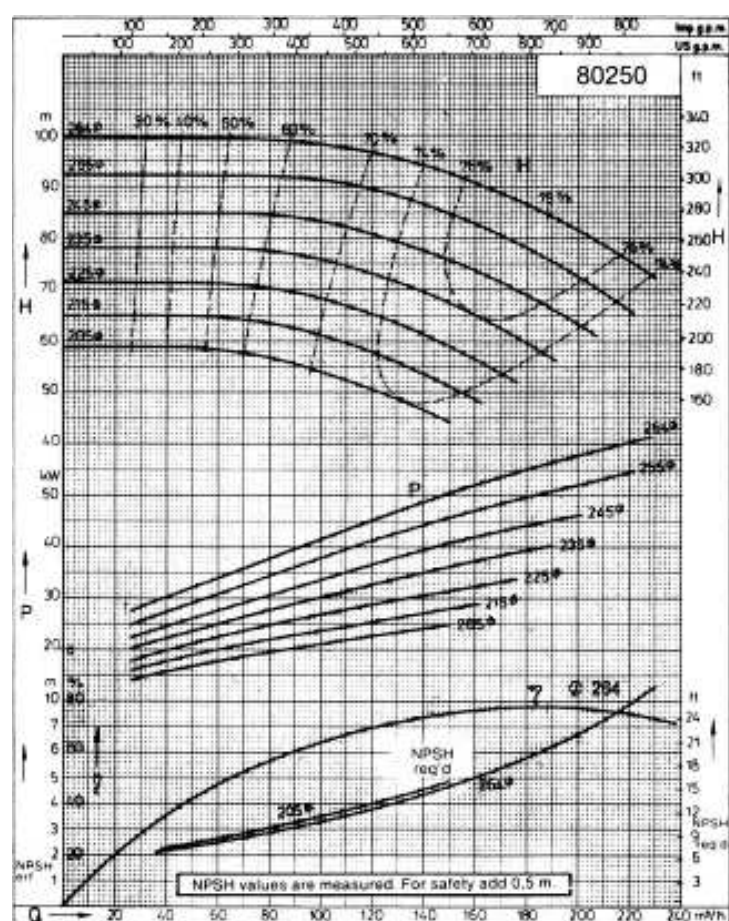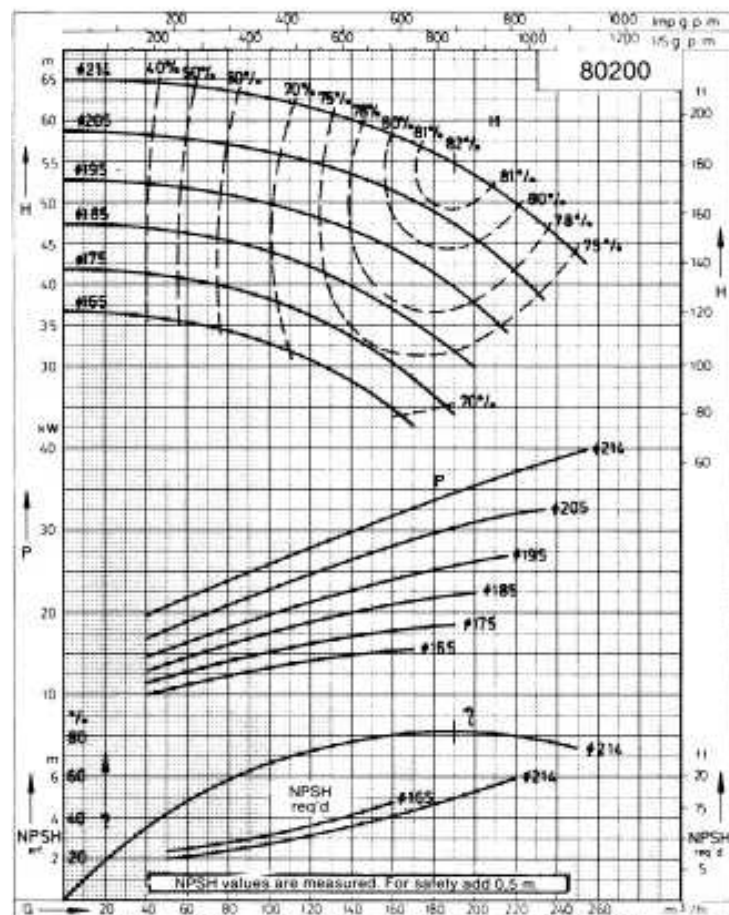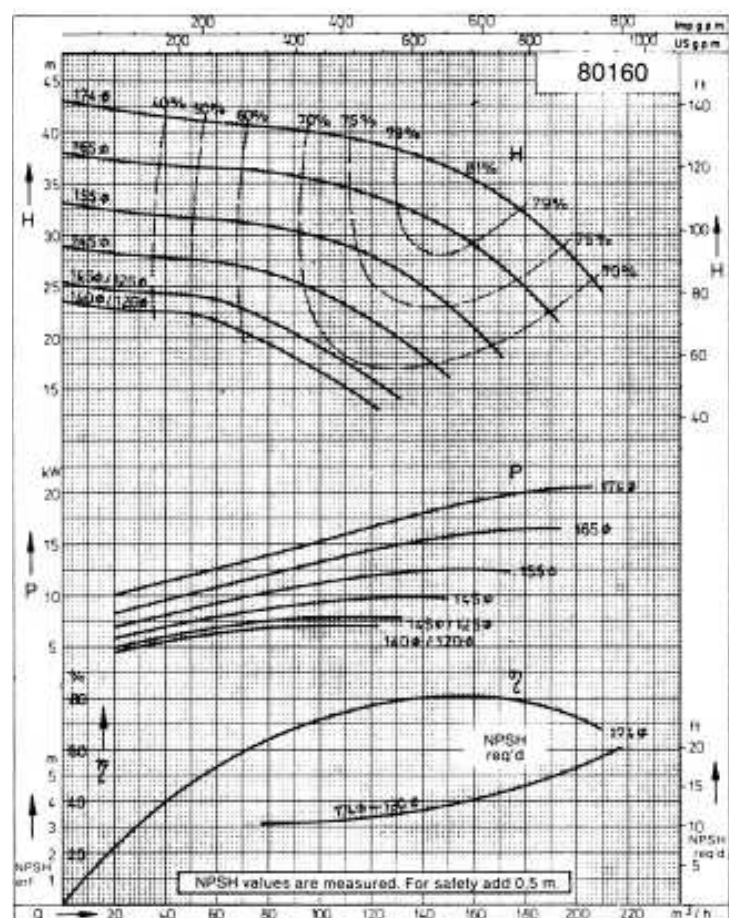



$n = 2900$ rpm

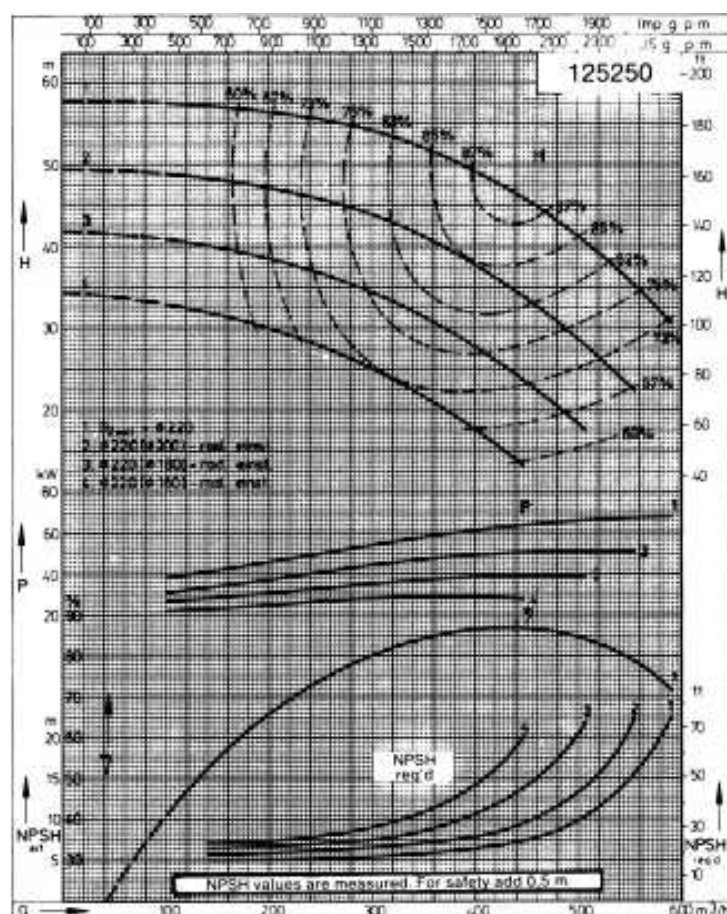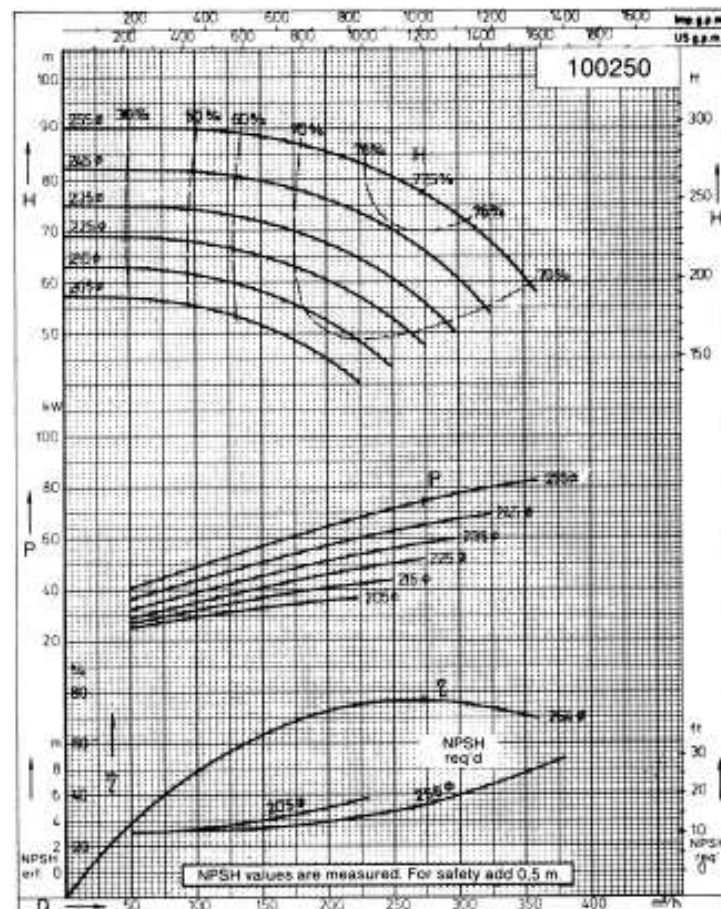

NOW





NOW

NOW

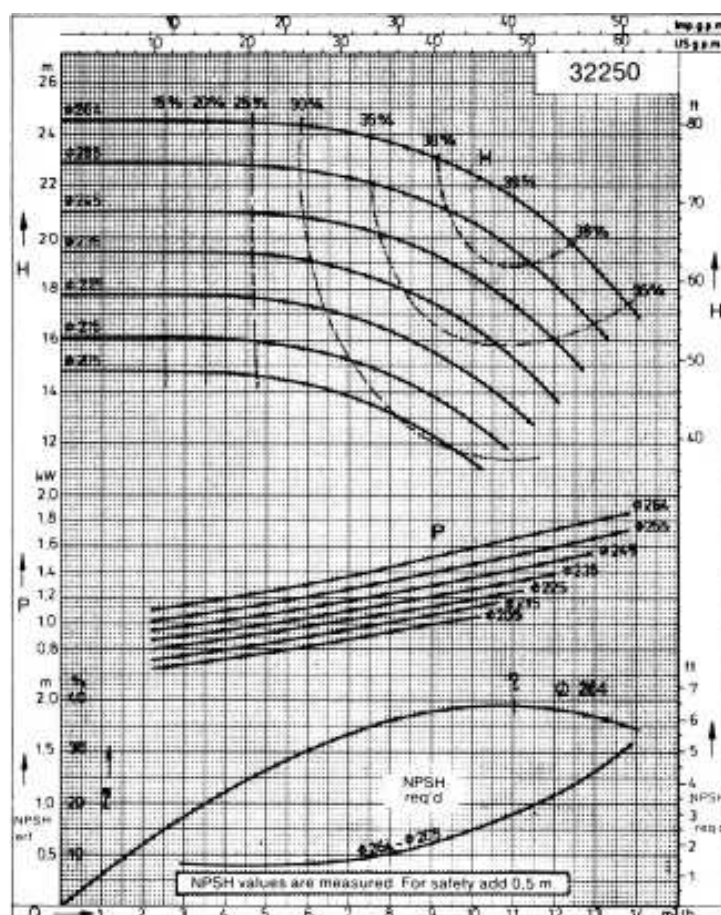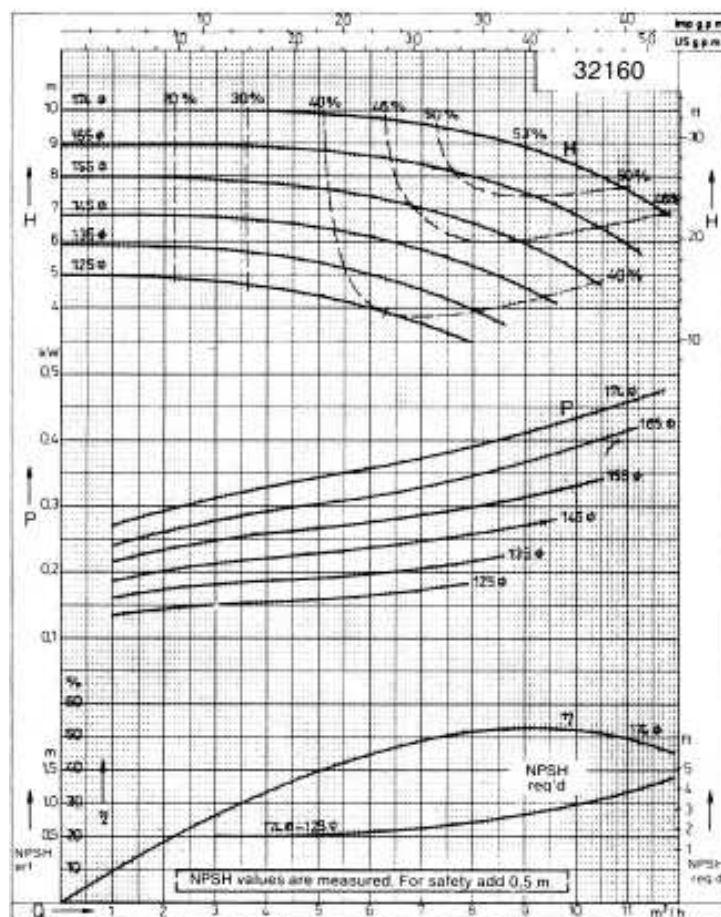

Performance curves





$n = 1450$ rpm

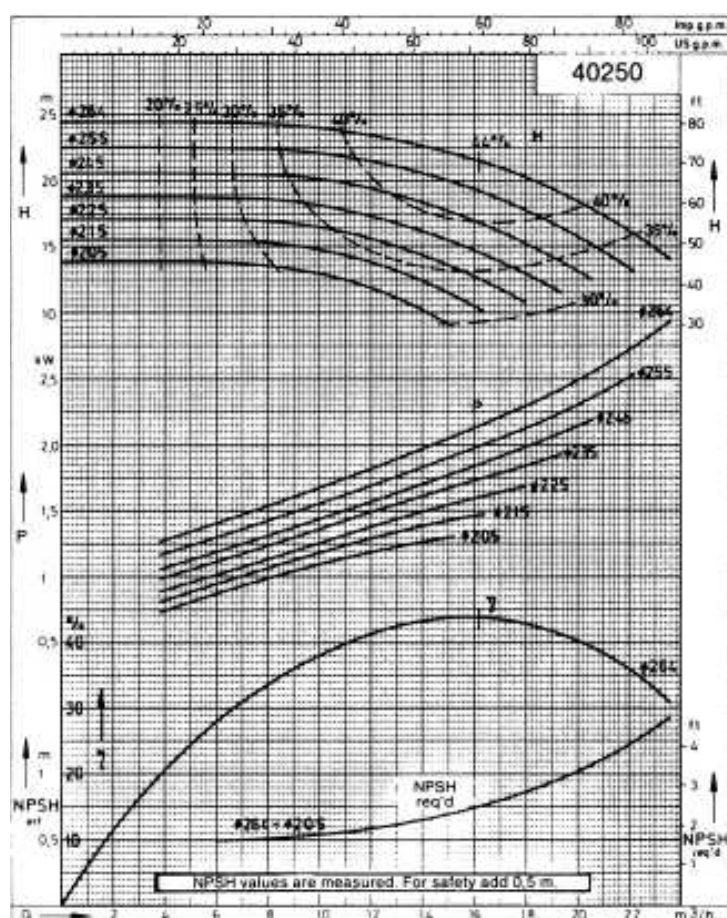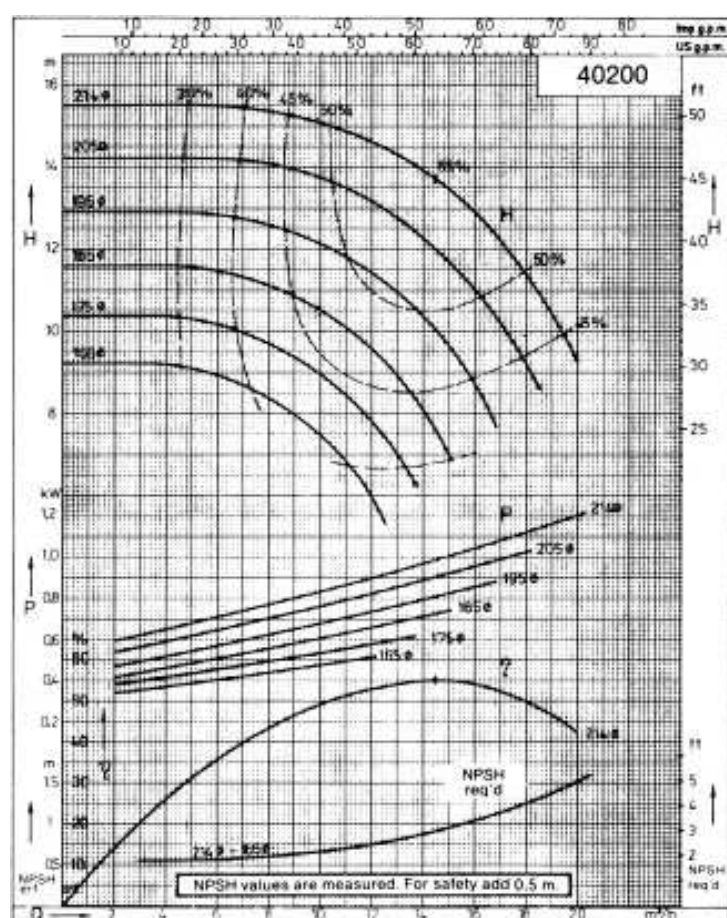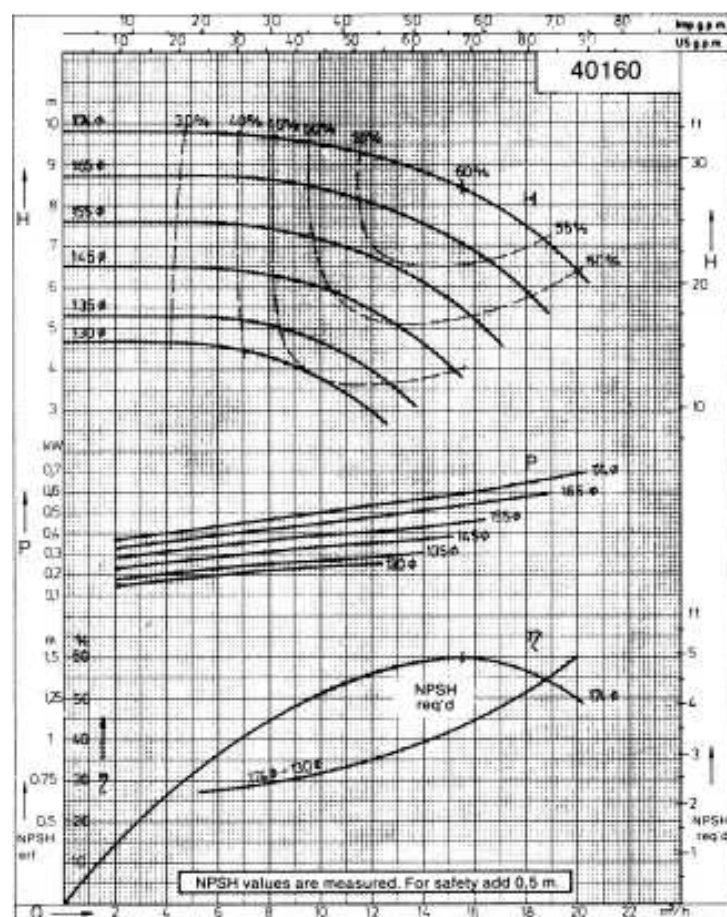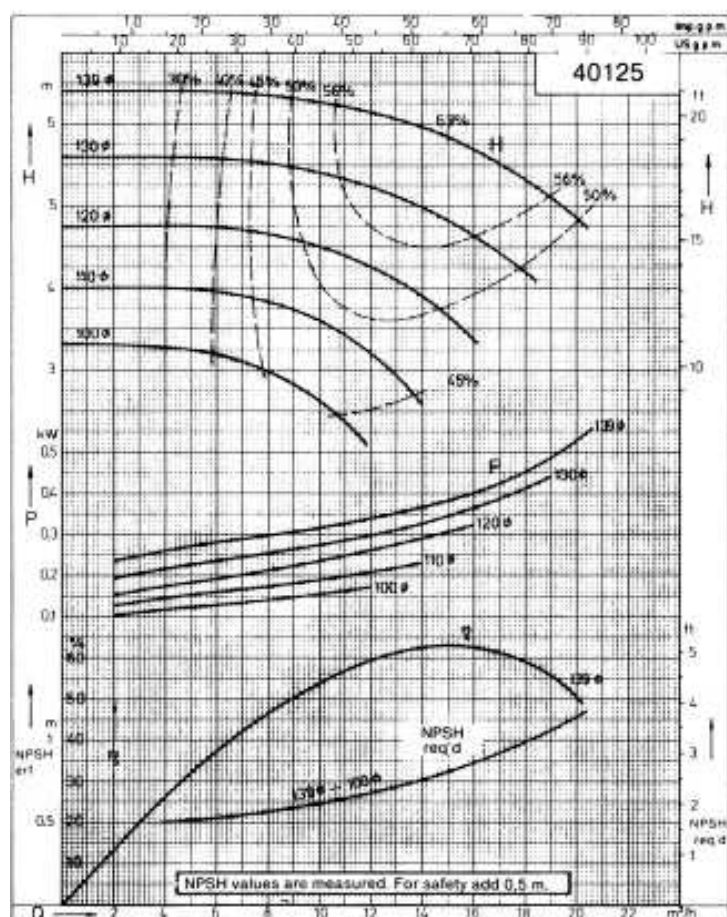

NOW





NOW

n = 1450 rpm

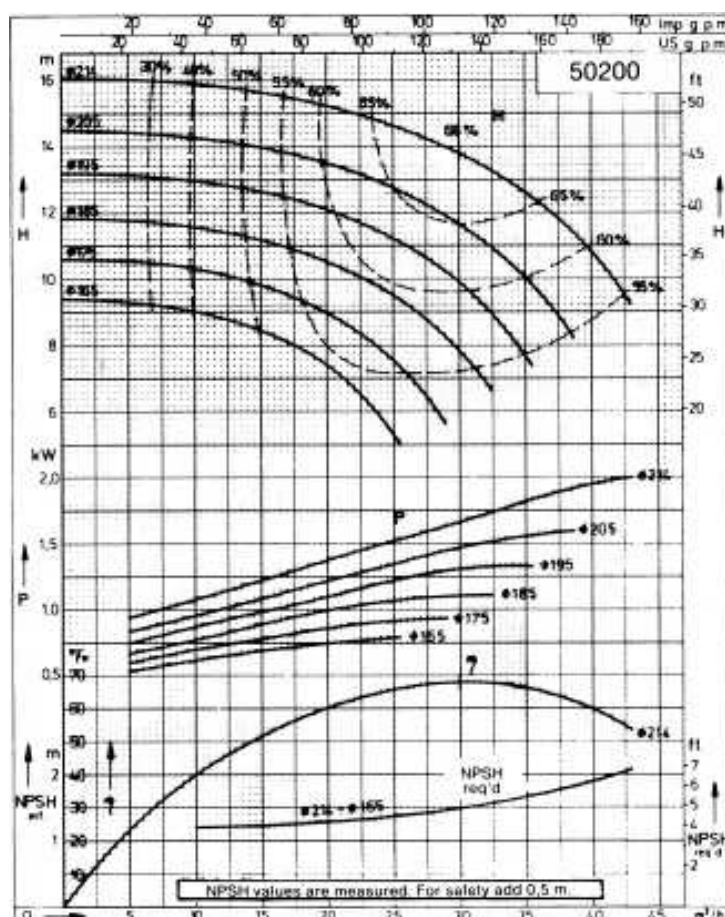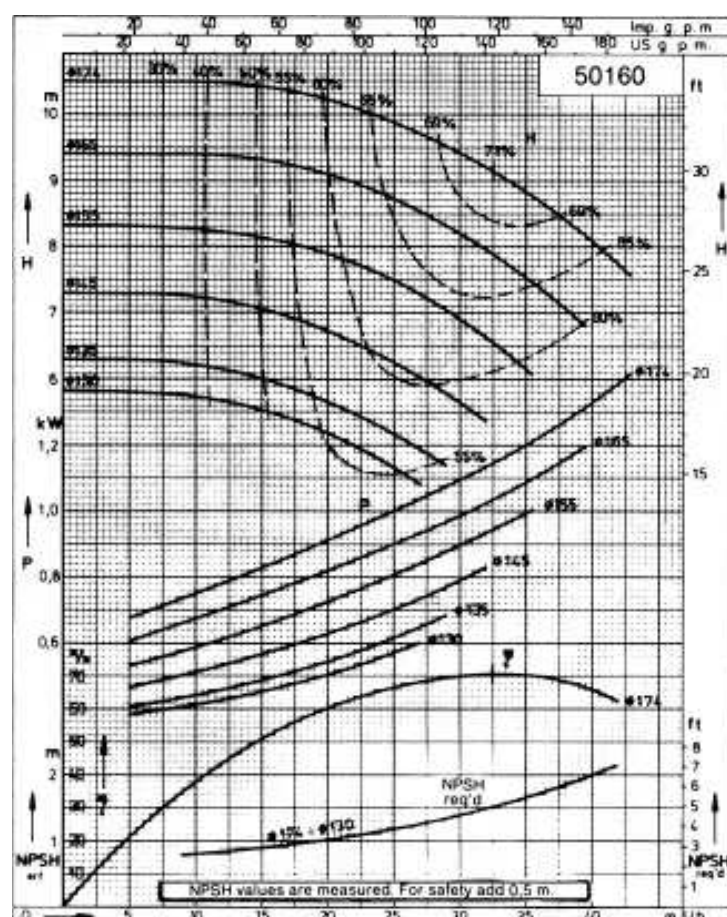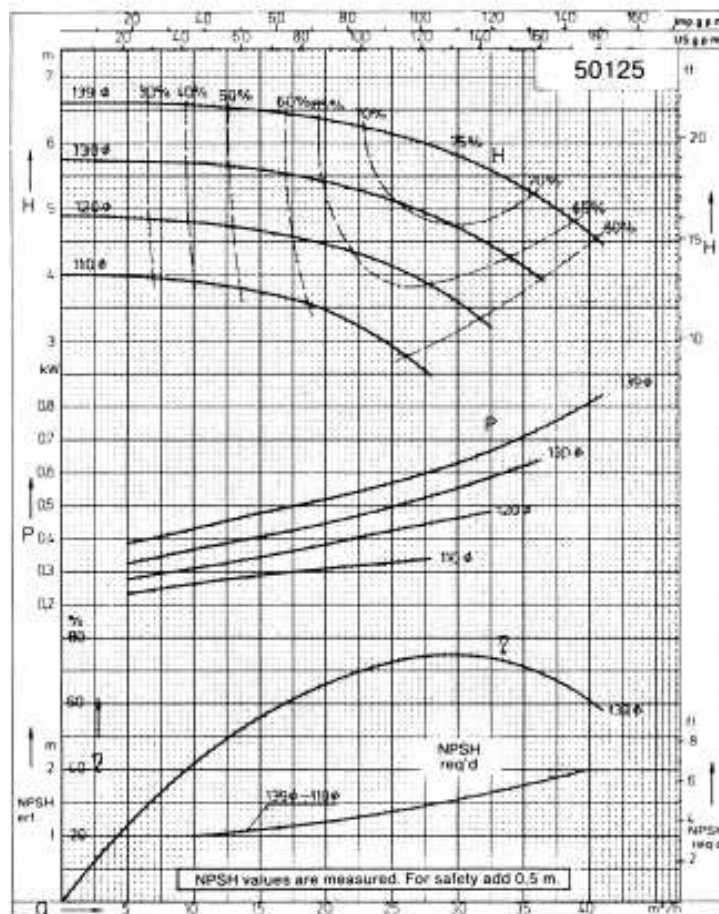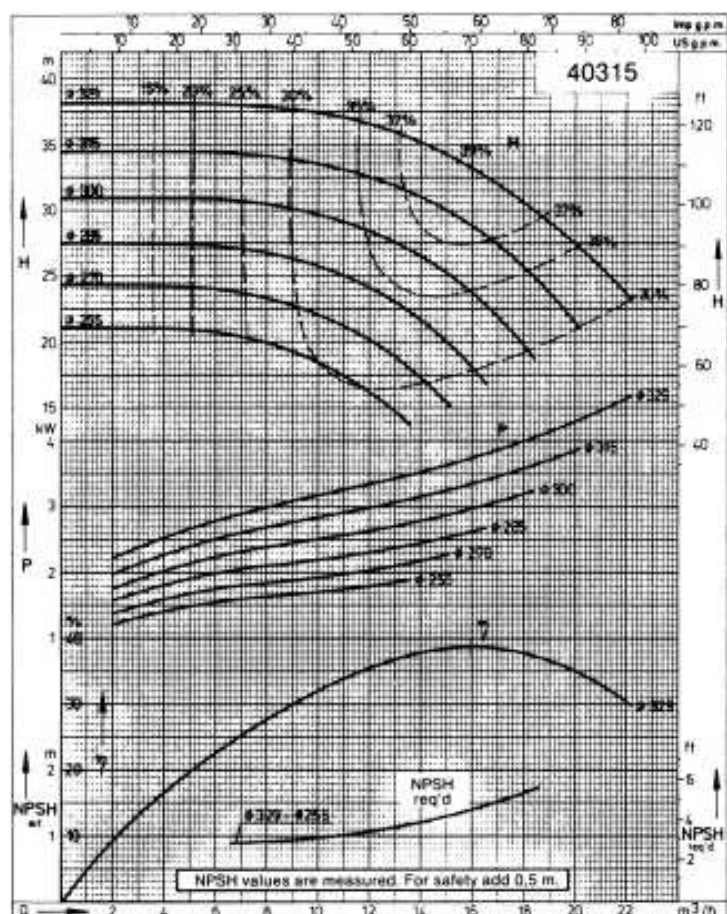





Performance curves

n = 1450 rpm

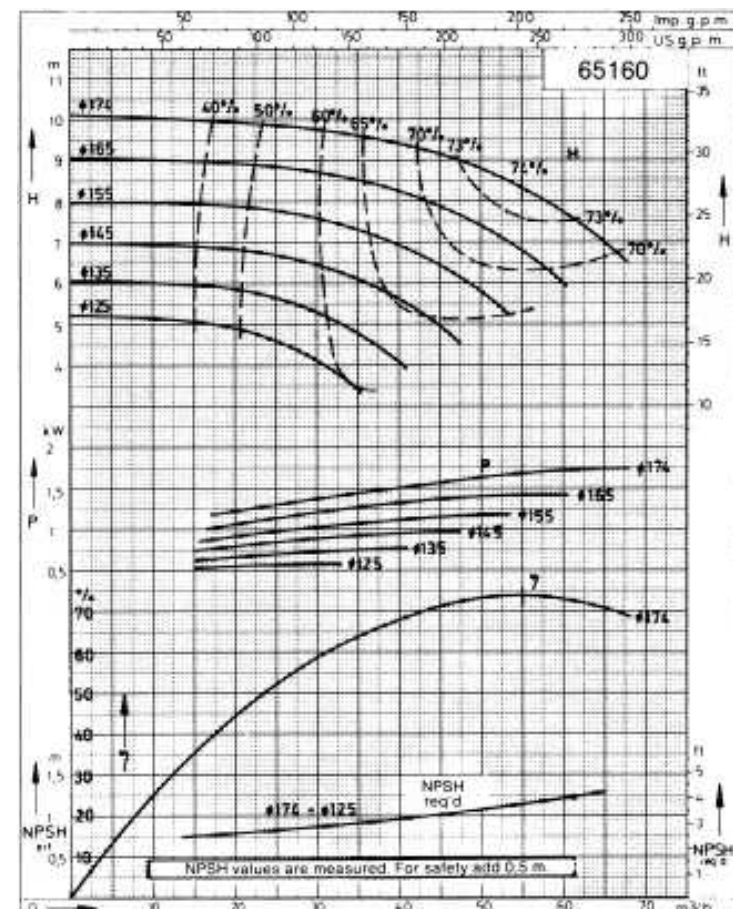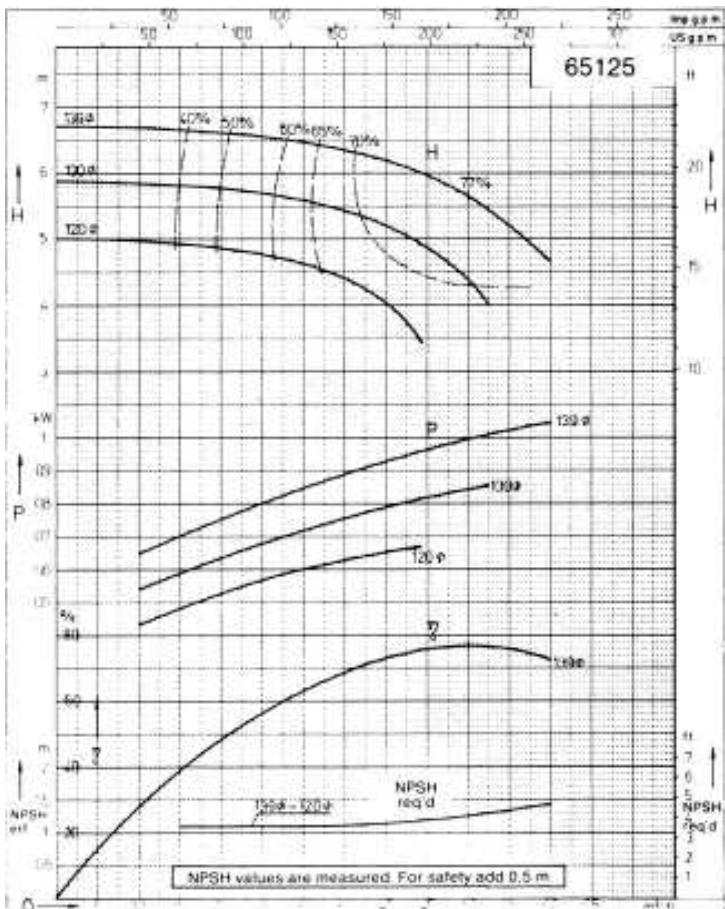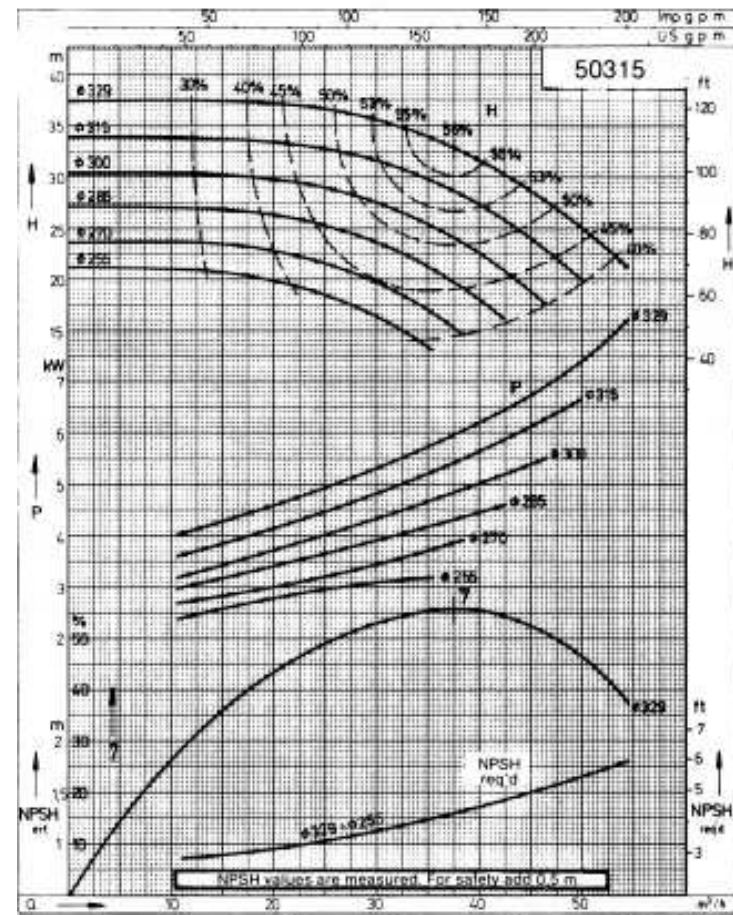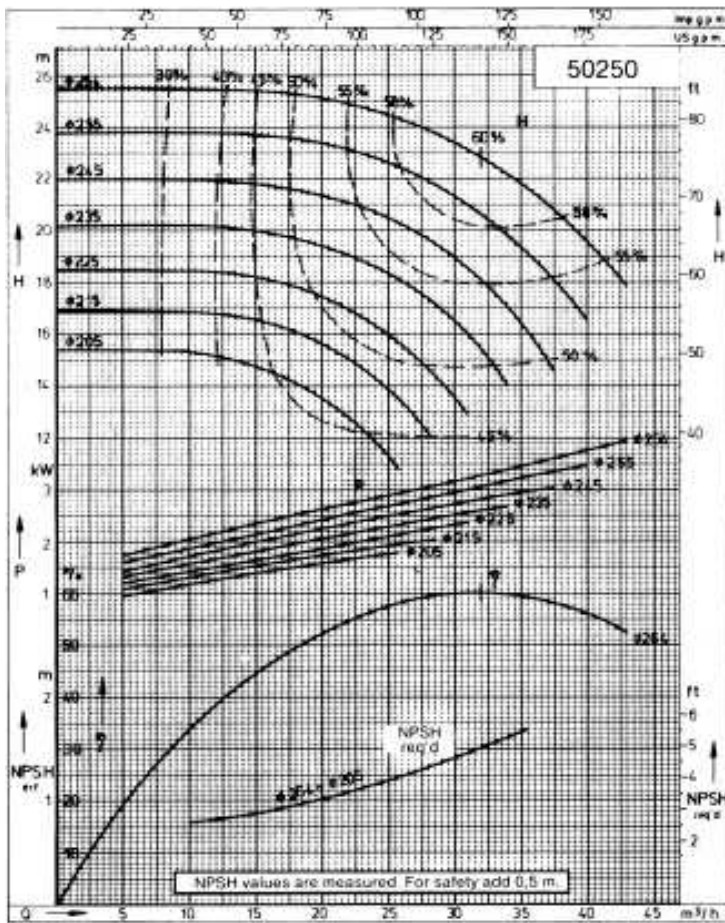





Performance curves

$n = 1450$ rpm

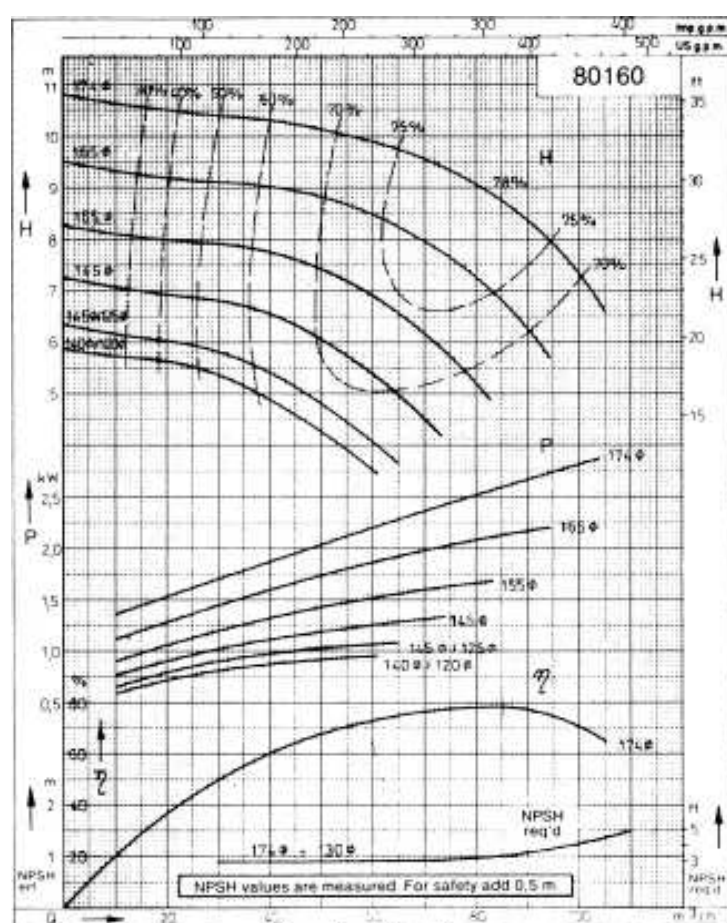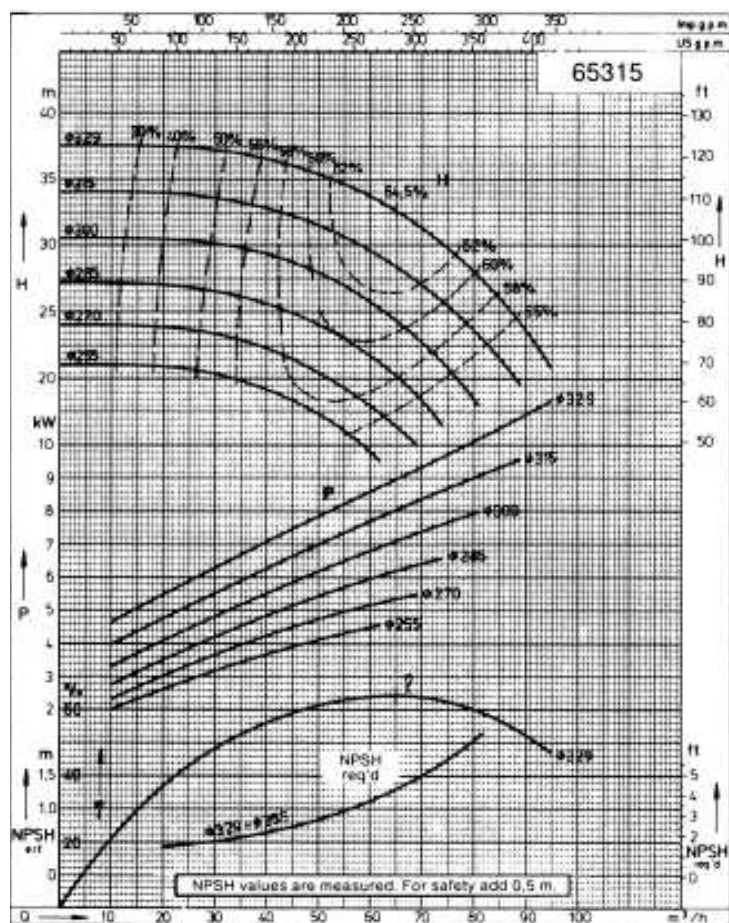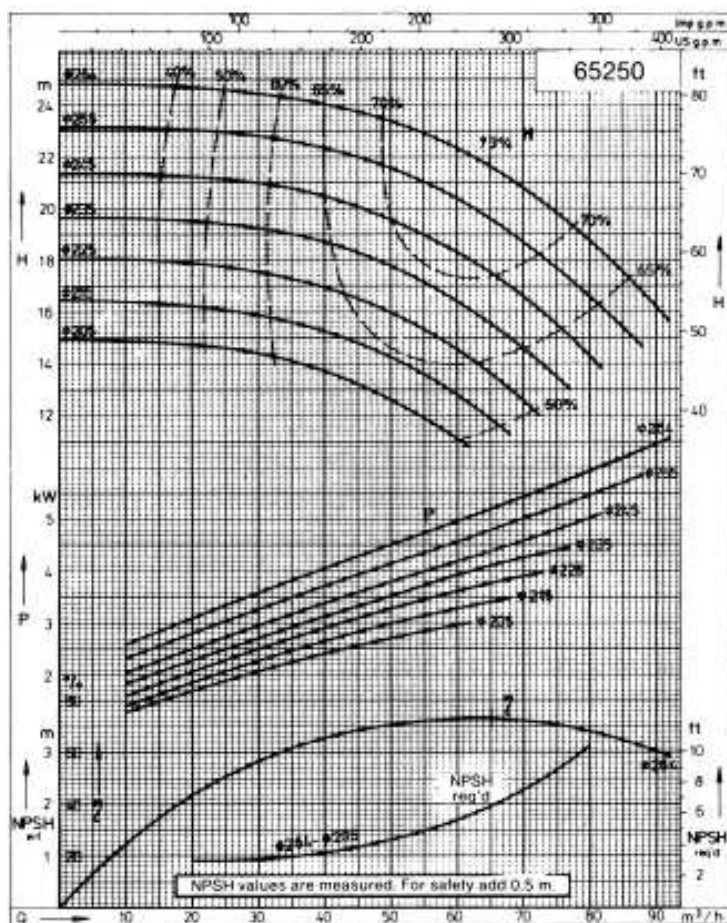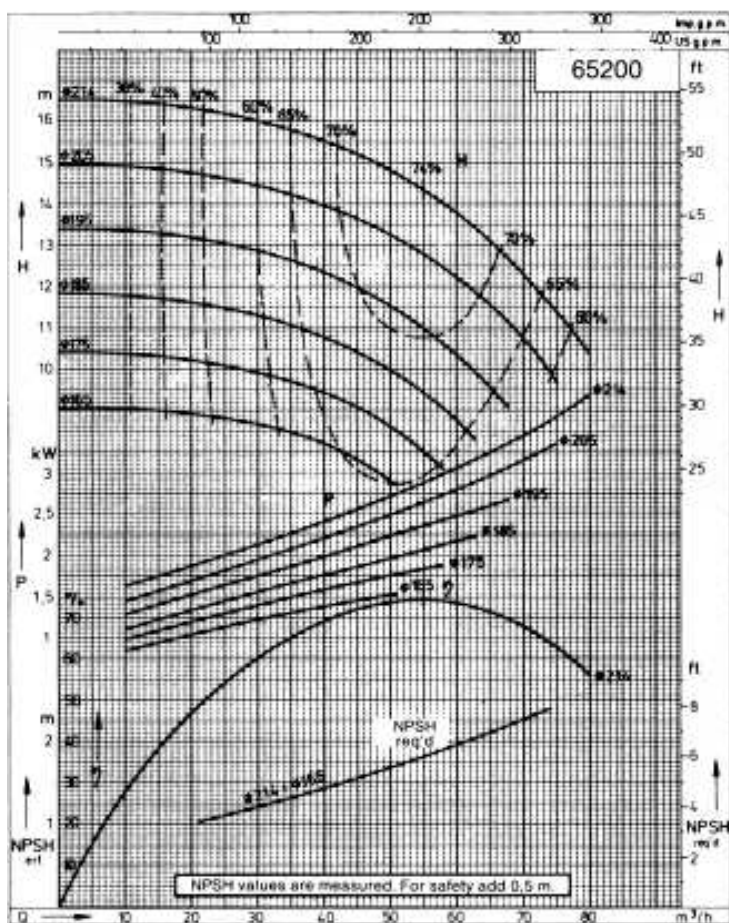

NOW



Performance curves

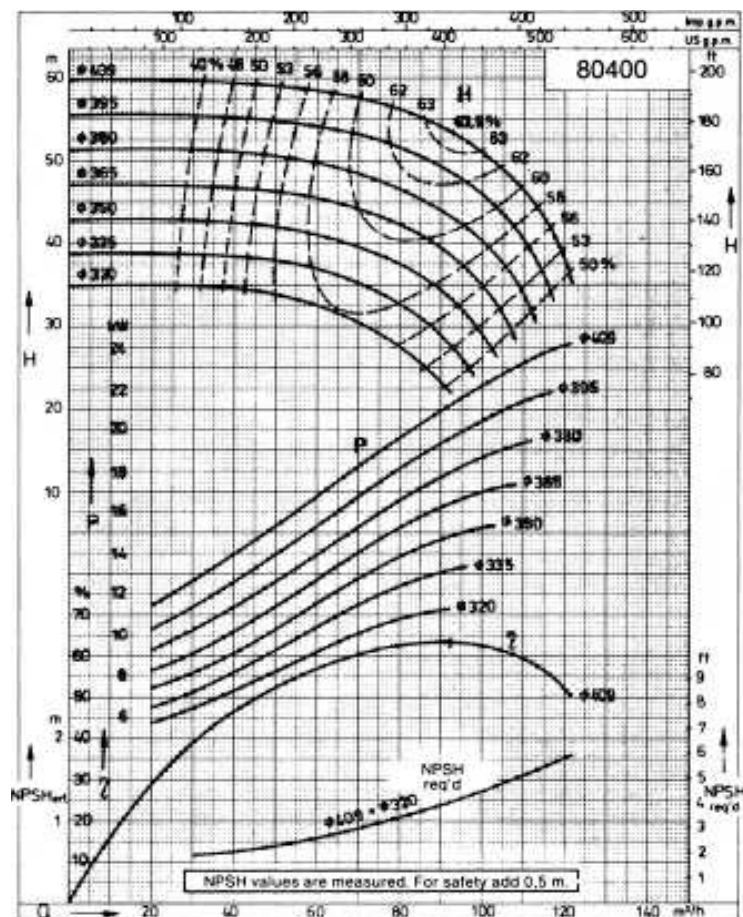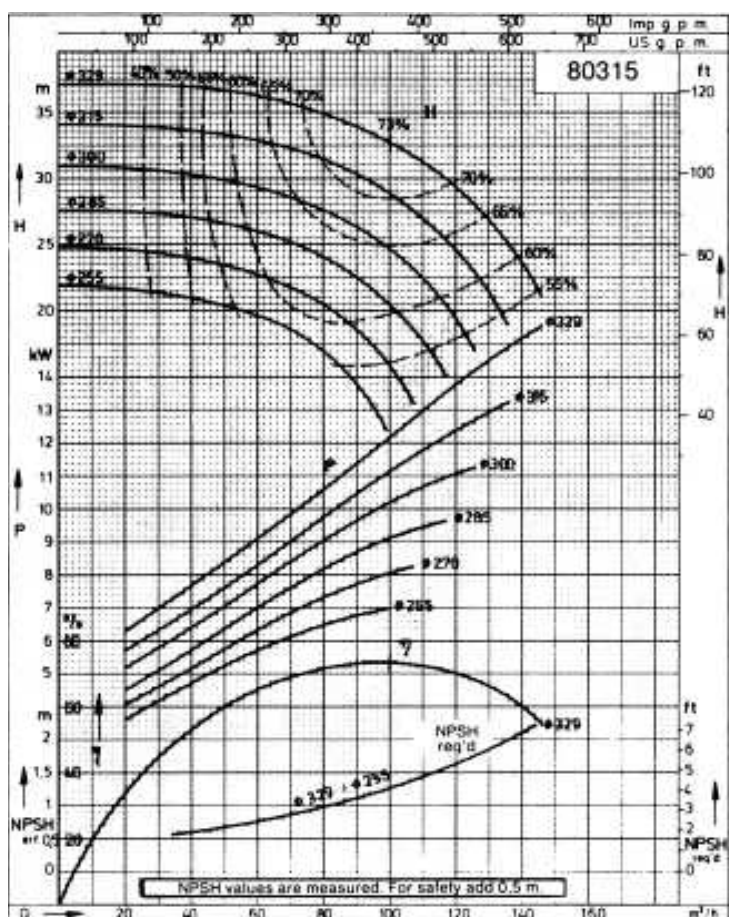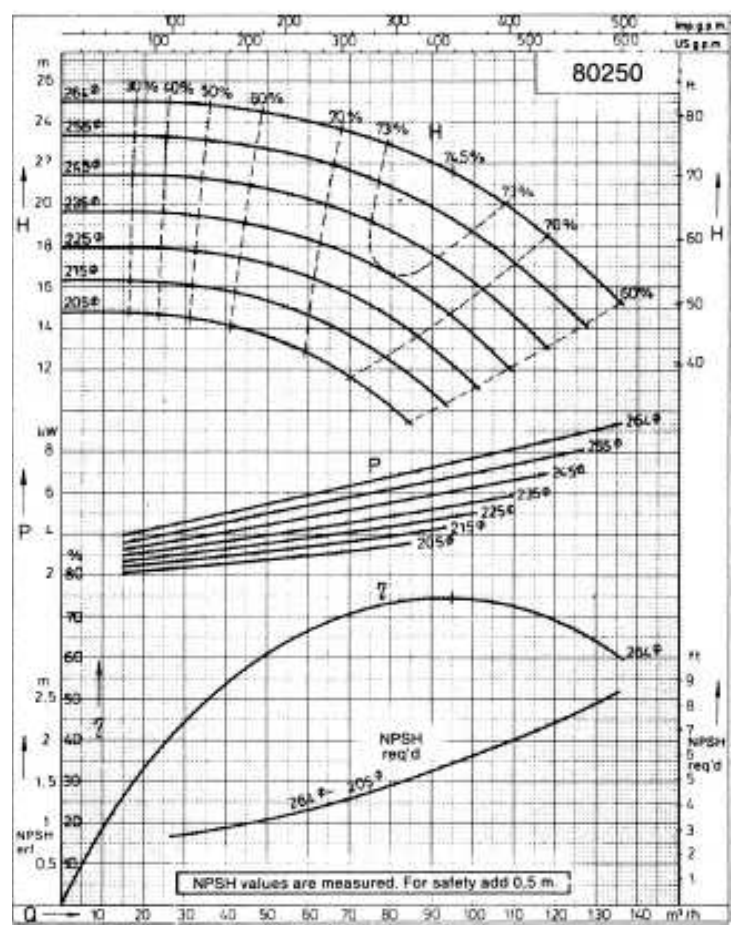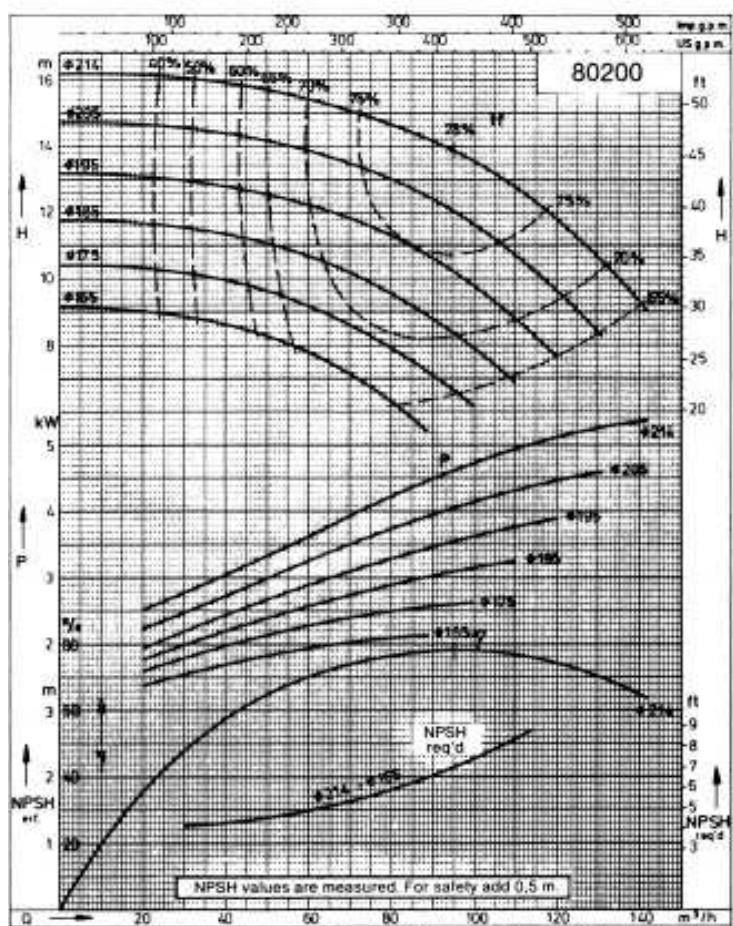

NOW

NOW

NOW

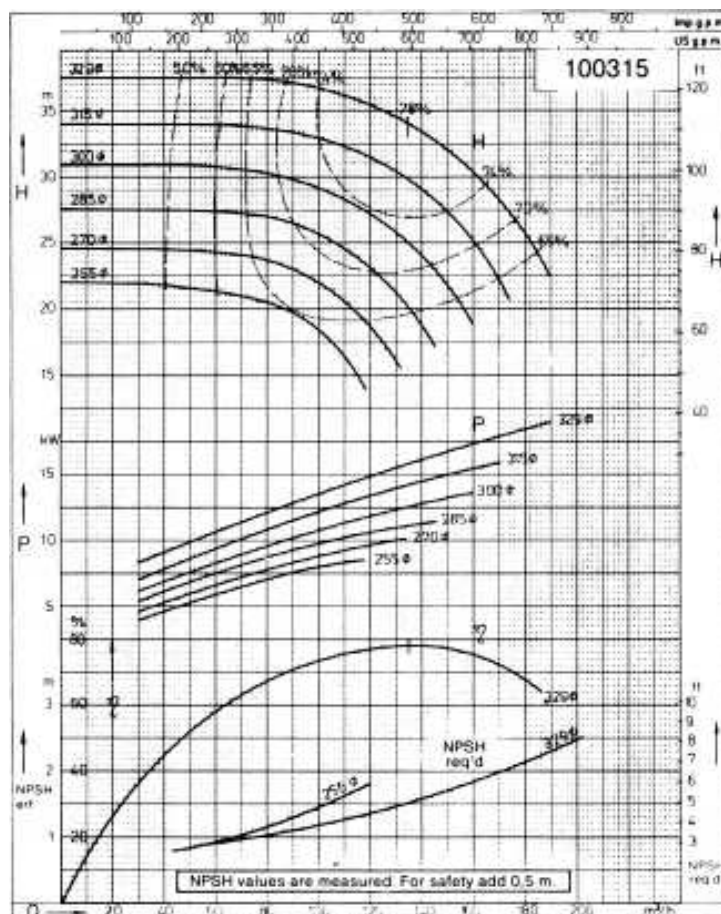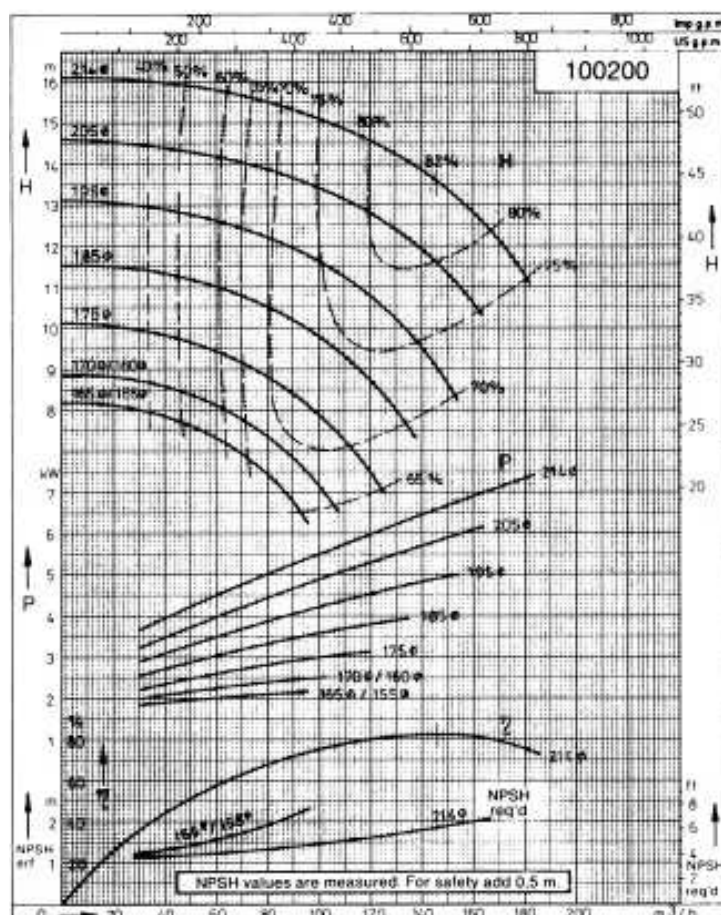

100400

Top X-axis: Flow rate Q in m^3/h (100 to 900) and $US\ gpm$ (100 to 800).

Left Y-axis: Head H in meters (30 to 60).

Right Y-axis: Head H in feet (100 to 180).

Bottom Left Y-axis: Power P in kW (10 to 40).



Bottom Right Y-axis: NPSH in meters (1 to 2) and feet (4 to 8).

Efficiency curves (H): 30%, 40%, 50%, 60%, 65%, 68%, 70%, 85%, 95%.

Power curve (P): Labeled with pump sizes $\phi 409$, $\phi 393$, $\phi 380$, $\phi 365$, $\phi 350$, $\phi 335$, $\phi 320$.

NPSH curve (NPSH req'd): Labeled with pump sizes $\phi 409$ and $\phi 320$.





Note: NPSH values are measured. For safety add 0.5 m.

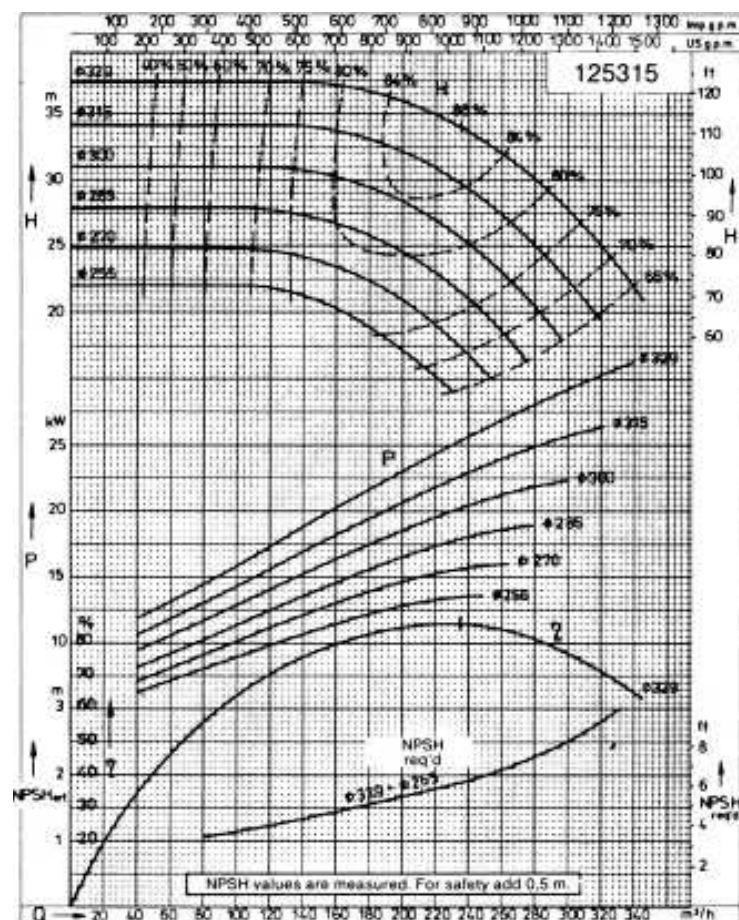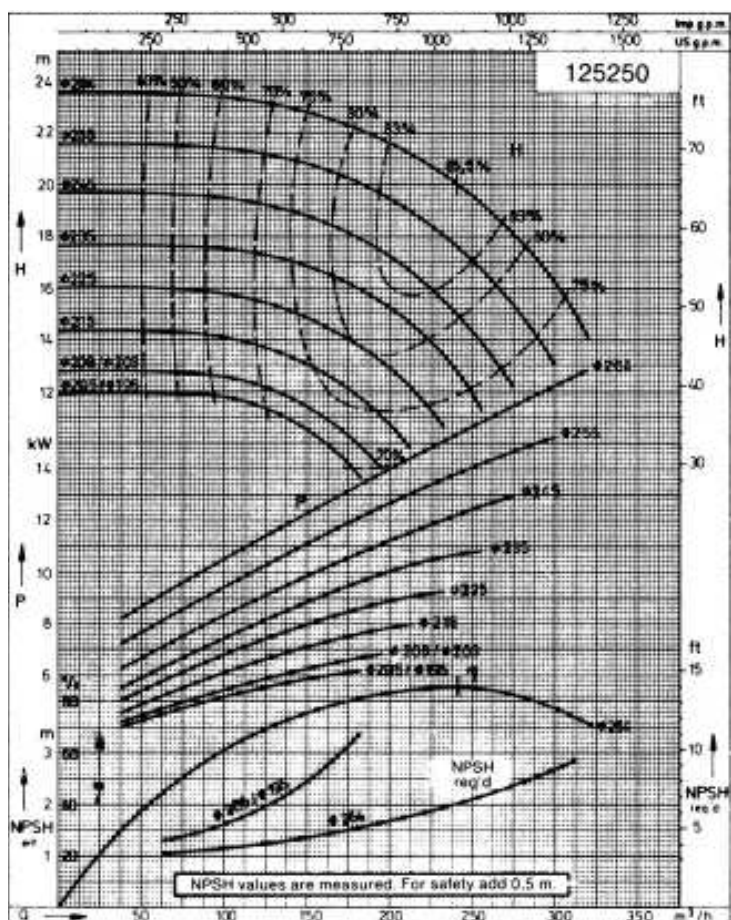

NOW


Performance curves

n = 1450 rpm

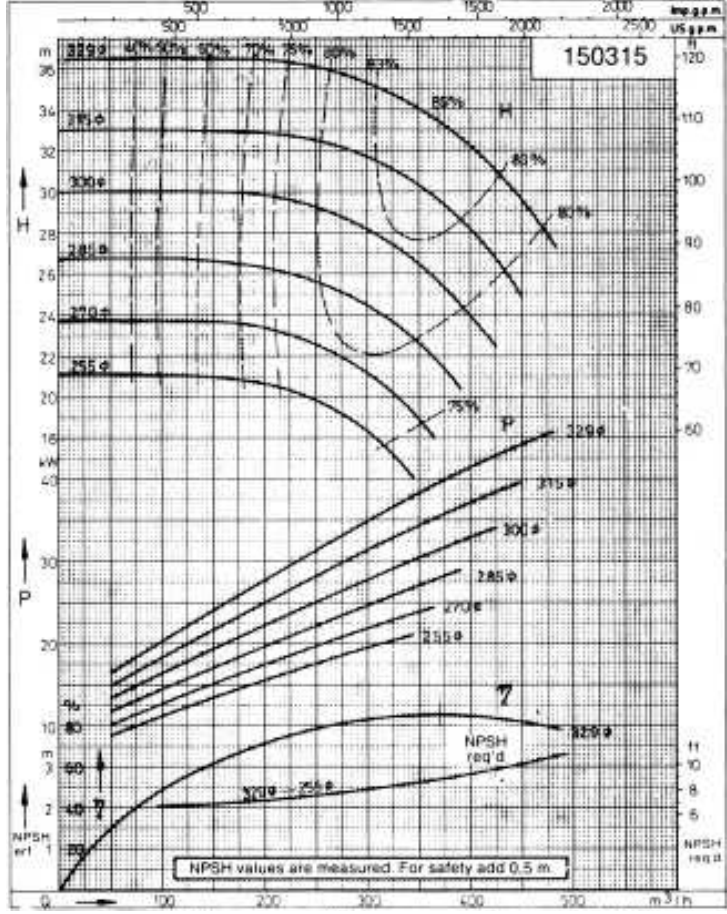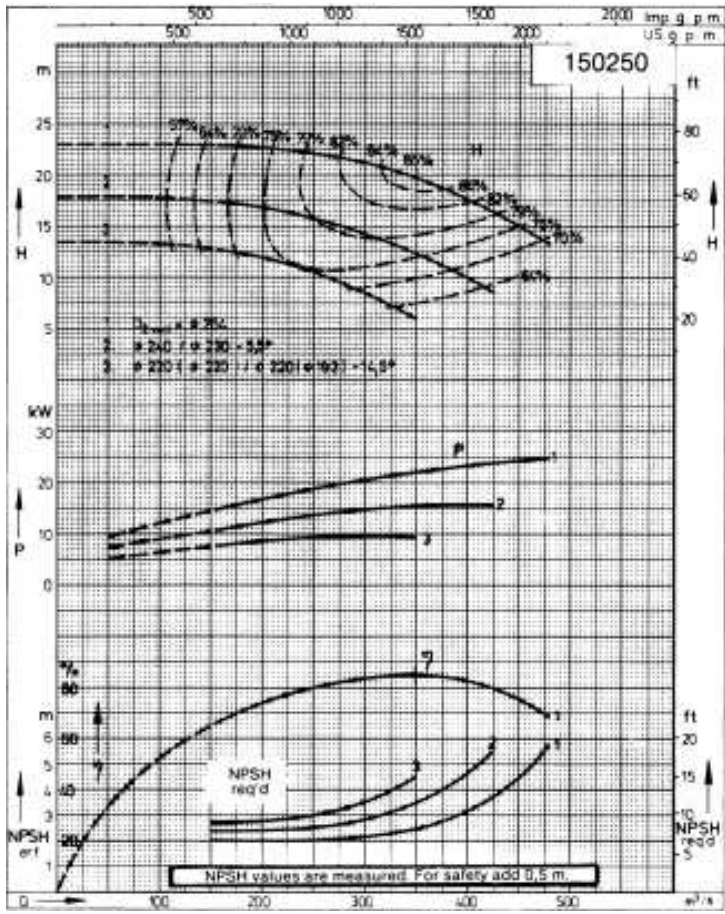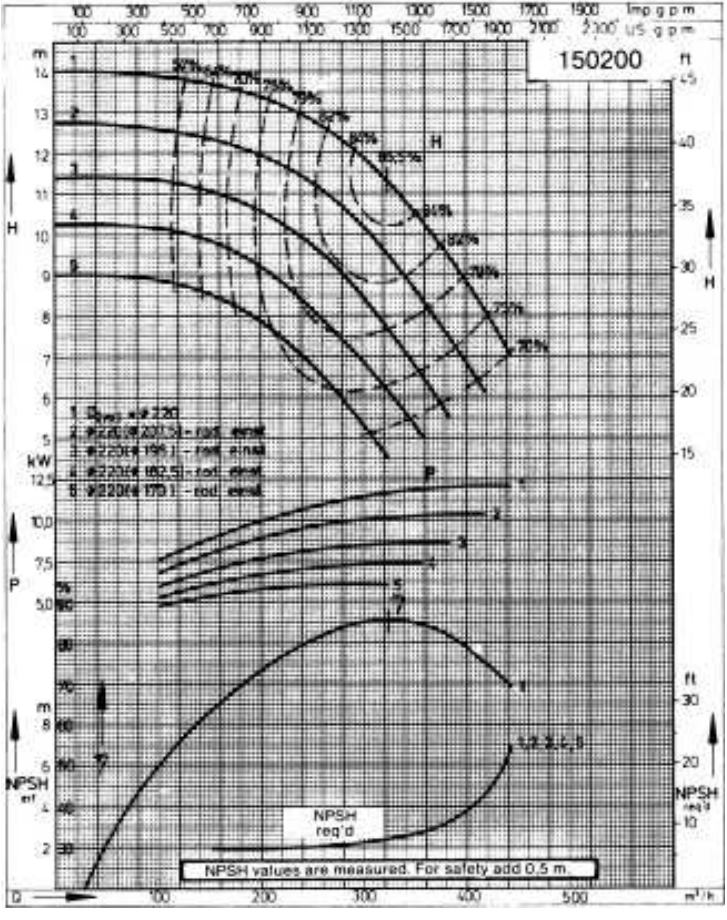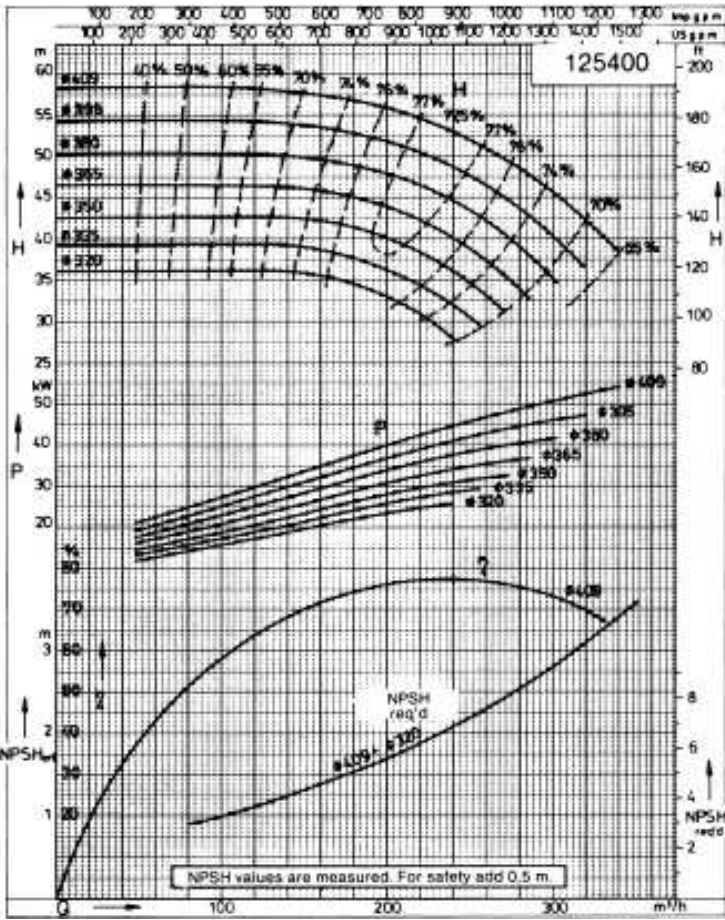

Performance curves

$n = 1450 \text{ rpm}$

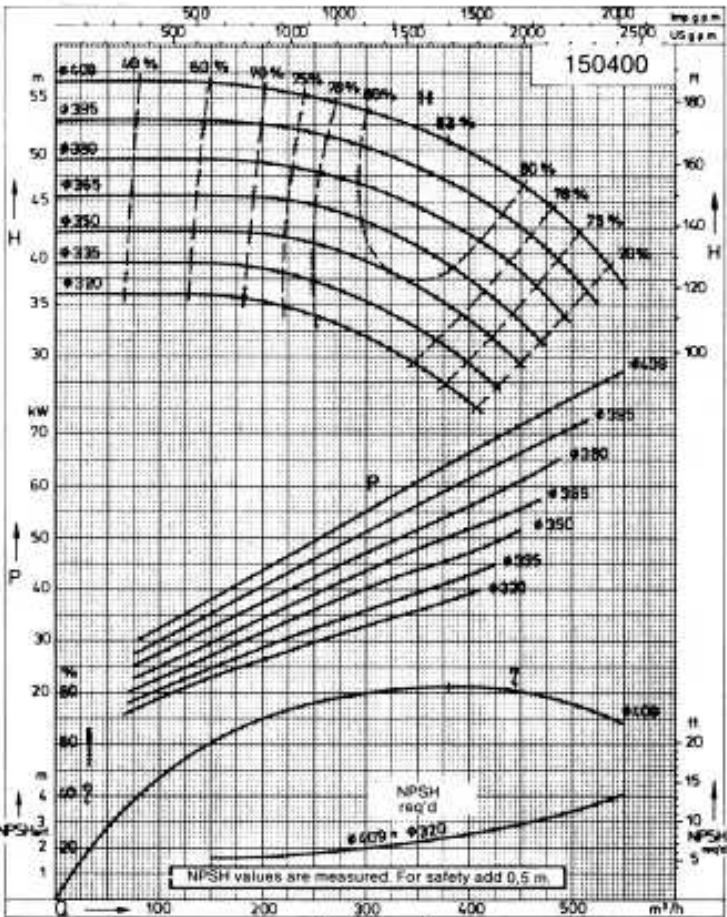



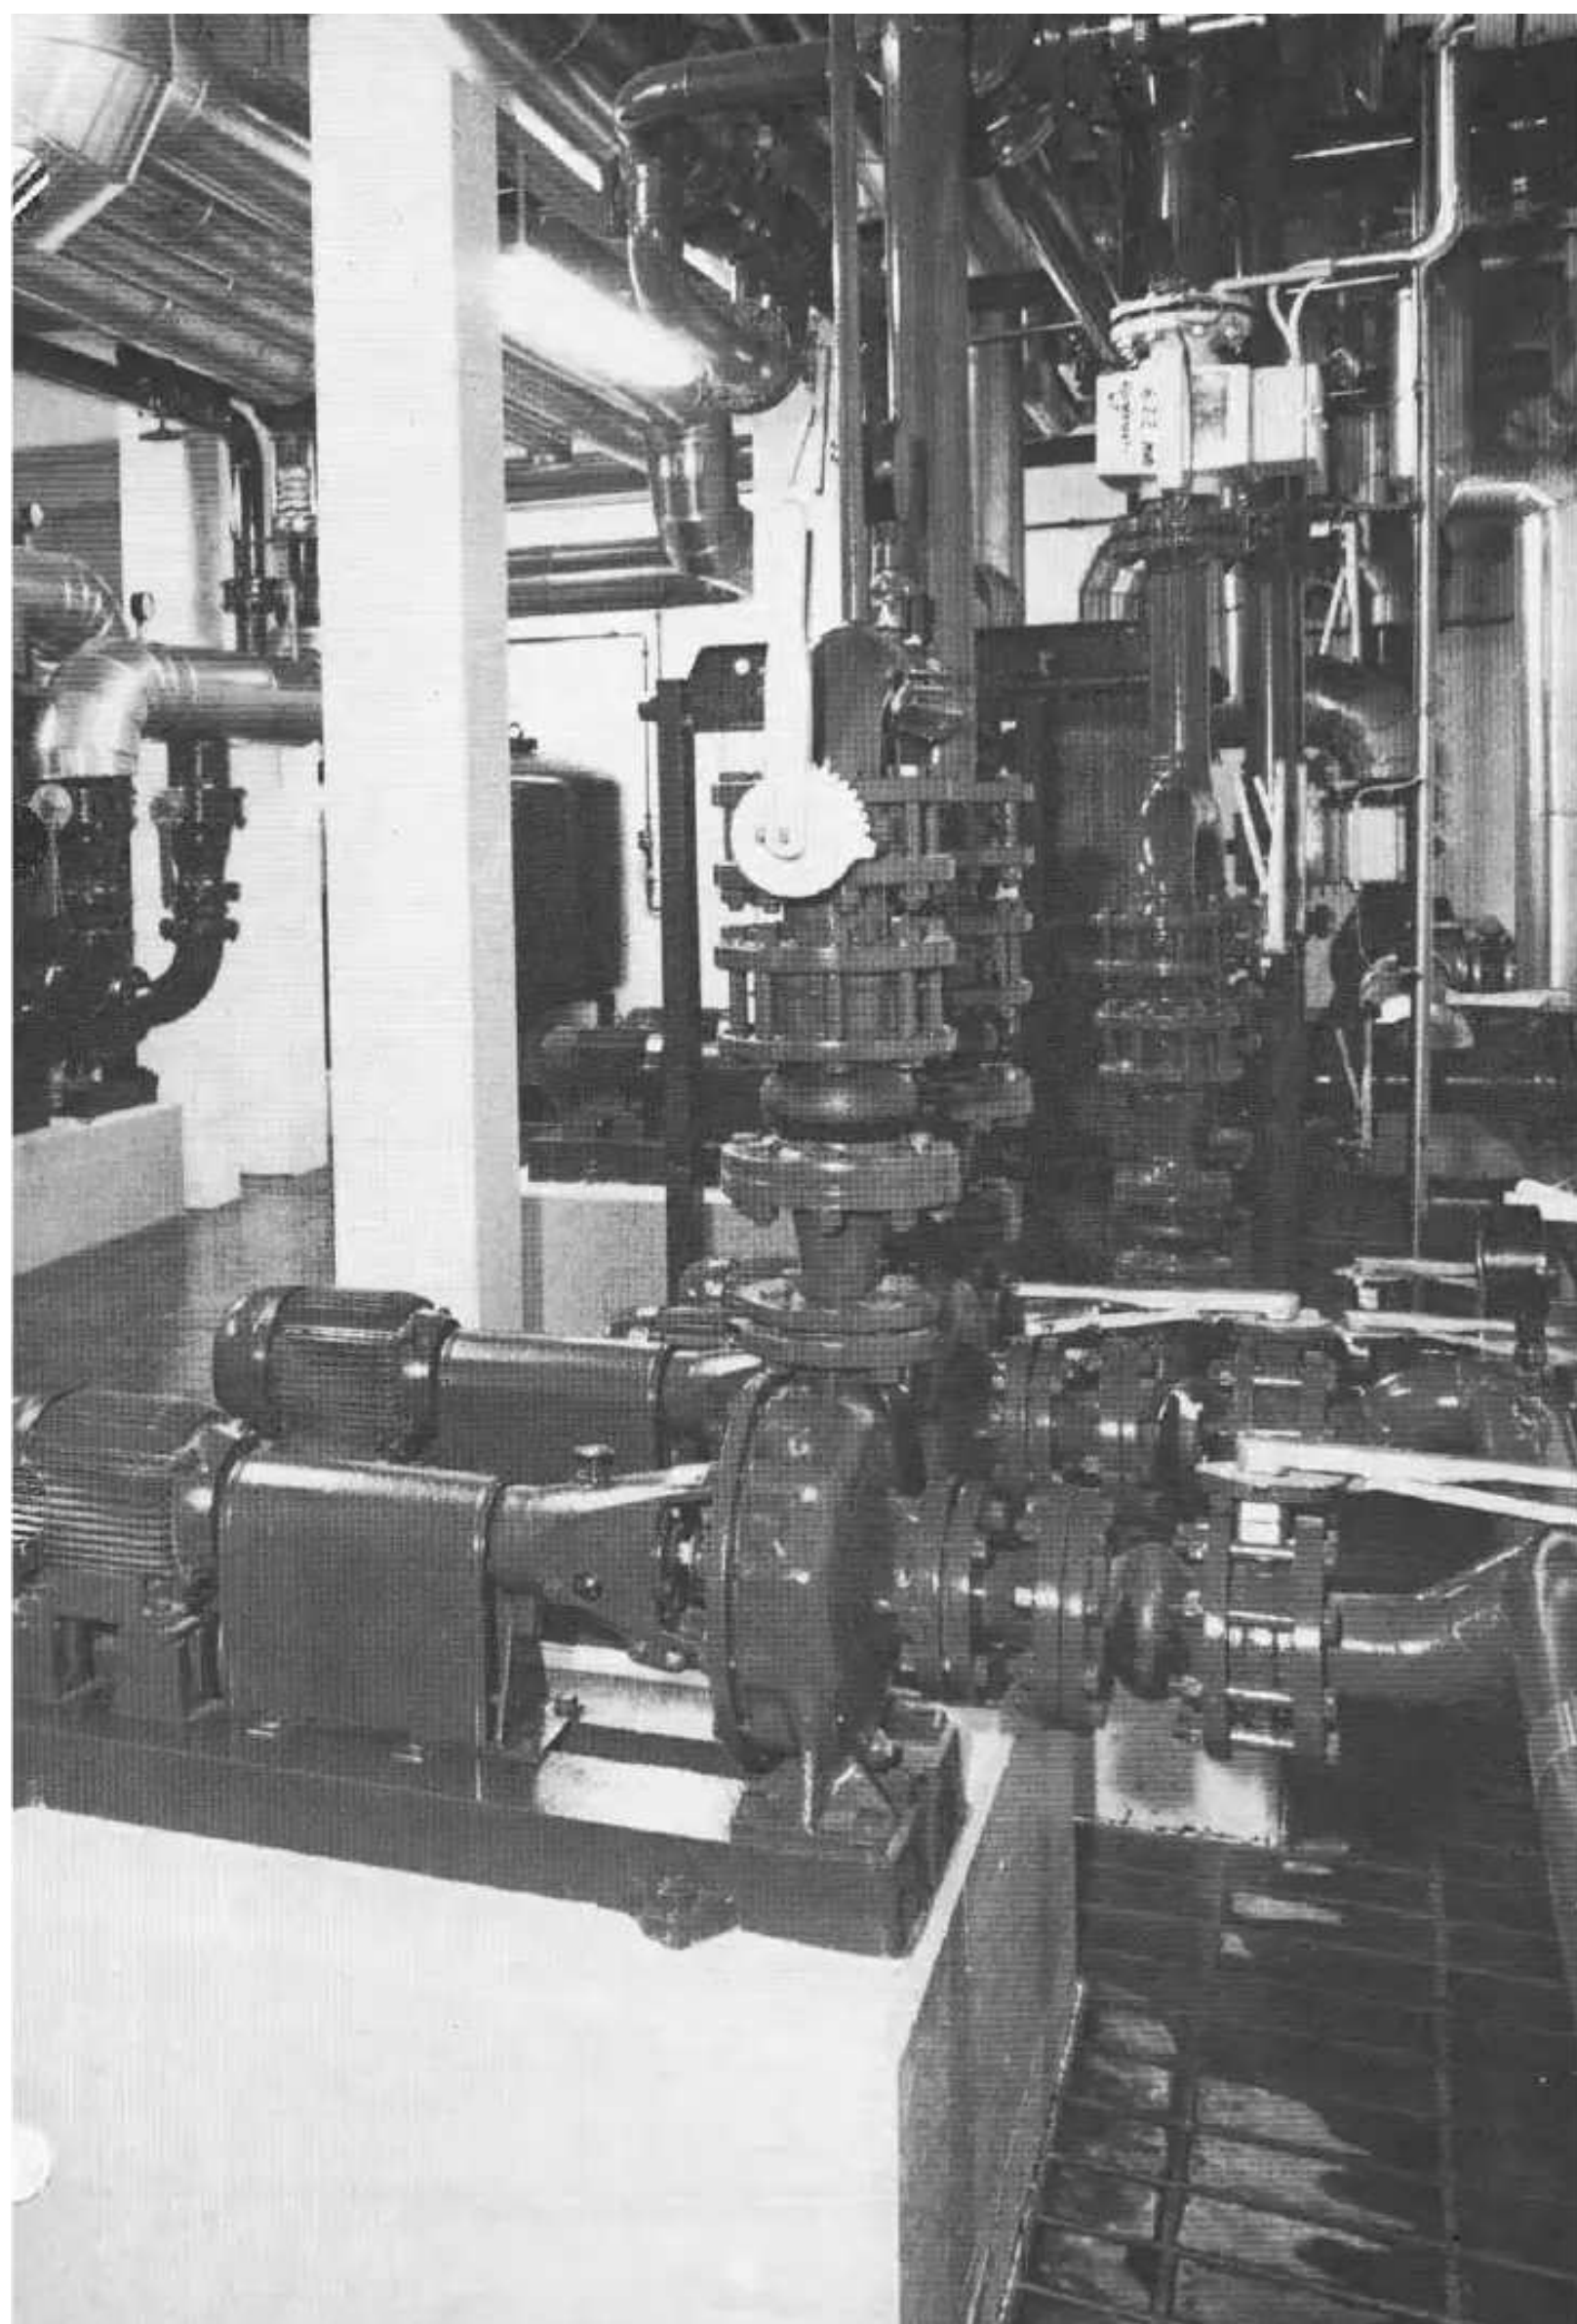


Table of dimensions

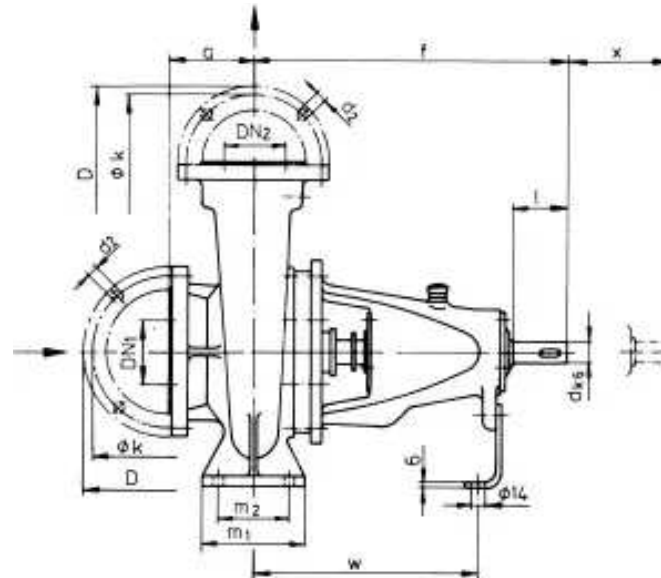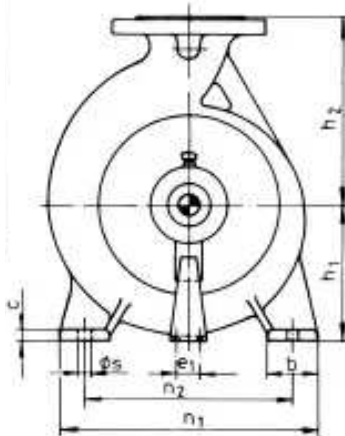

Dimensions in mm, permissible dimensional deviations and tolerances to VDMA 24275

Pump size	Bearing housing	DN ₂	DN ₁	a	f	h ₁	h ₂	b	c	e ₁	m ₁	m ₂	n ₁	n ₂	s	w	d	l	t	u	x		
32125	25	32	50	80	360	112	140	50	14	100	100	70	190	140	14	267	24	50	27	8	140		
32160						132	160						240	190									
32200						160	180						320	250									
32250 ¹⁾				100		180	225	65		110	125	95	320	250									
40125		40	65	80		112	140	50		100	100	70	210	160									
40160						132	160						240	190									
40200						160	180						265	212									
40250						100	180			225	320	250											
40315 ¹⁾				35	125	470	200	250		65	110	125	95	345								280	342
50125	25	50	65	100	360	132	160	50		100	100	70	240	190	14	267	24	50	27	8			
50160						160	200						265	212									
50200						180	225						320	250									
50250						200	250			345	280												
50315 ¹⁾				35	125	470	225	280		65	110	125	95	280								212	342
65125	25	65	80	100	360	160	180	65		110	125	95	280	212	18	342	32	80	35	10		140	
65160						180	200							320									250
65200						200	250							360									280
65250						225	280							400									315
65315				35	125	470	225	280	80		16	160	120	400							315		342
80160 ³⁾	25	80	100	125	360	180	225	65	14		125	95	320	250	14	267	24	50	27	8			
80200 ³⁾						250	315							345							280		
80250 ³⁾						200	280							400							315		
80315 ³⁾						250	315							435							355		
80400 ¹⁾²⁾⁴⁾	45			150	530	280	355	80	18		160	120	400	315							370		42
100160 ¹⁾⁴⁾	35	100	125	140	470	200	280	80	16		200	150	500	280	18	370	42	110	45	12			
100200 ³⁾						225	315							435							355		
100250 ³⁾						250	315							470							370		
100315 ³⁾						280	355							500							400		
100400 ²⁾⁴⁾	45			150	530	280	355	100	18		200	150	500	400							22		370
125200 ¹⁾⁴⁾	35	125	150	160	470	250	315	80	16		160	120	400	315	22	342	32	80	35	10			
125250 ³⁾						280	355							435							355		
125315 ²⁾⁴⁾						315	400							470							370		
125400 ²⁾⁴⁾						355	450			500				400									
150200 ¹⁾⁴⁾	35			150	200	160	470	280	375	100	18	200	150	500							400	22	370
150250 ¹⁾²⁾⁴⁾		315	450					435	355														
150315 ²⁾⁴⁾		355	450					470	370														
150400 ²⁾⁴⁾		400	450					500	400														
200250 ¹⁾²⁾⁴⁾	45	200	160			580	280	400	22	500	400	200											

¹⁾ Additional sizes (not contained in DIN 24255)

²⁾ These sizes do not conform to the illustration in all details


³⁾⁴⁾ For dimension "D" see flange connection dimensions

Flange mating dimensions to DIN 2501									
PN 10									
DN ₂ / DN ₁	32	40	50	65	80	100	125	150	200
D	140	150	165	191	200	235 ²⁾ 229 ⁴⁾	270 ²⁾ 254 ⁴⁾	300 ²⁾ 285 ⁴⁾	343 ⁴⁾
k	100	110	125	145	160	180	210	240	295
d ₂ x number	18 x 4	18 x 4	18 x 4	18 x 4	18 x 8	18 x 8	18 x 8	22 x 8	22 x 8


The outside diameters and thickness of the flanges in some cases differ from DIN 2532 PN 10 (permissible in accordance with VDMA 24297).

Connections

For all shaft seal versions

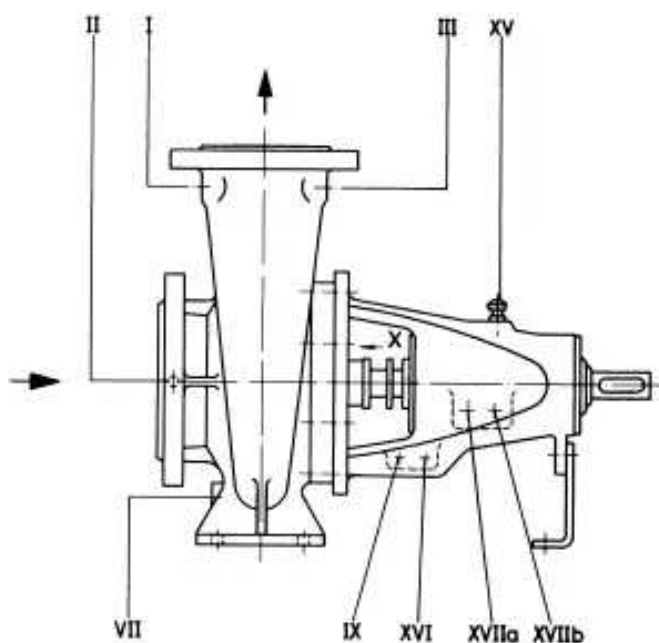

Additional for shaft seal versions
051 or 052
(View X)

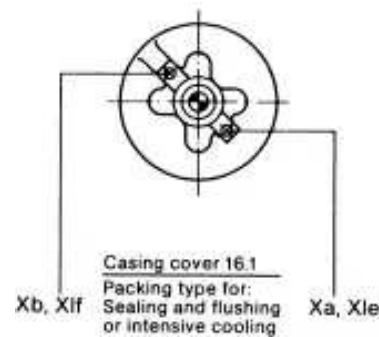


Code	Connections	for version with	Position of connections as seen from drive	Dimensions	
I	Pressure gauge connection		on discharge branch, suction side	G 1/4	G 1/2 for 125200–150200 100250–150250 80315–150315 80400–150400 200250
II	Pressure/vacuum gauge connection		on suction branch flange, right	G 1/4	
III	Vent		on discharge branch, drive side	G 1/4	G 3/8 for 150250 125315–150315 80400–150400 200250
VII	Drain		on bottom of volute casing, suction side	G 3/8	G 1/4 for 32125– 50125 32160– 50160 32200– 50200
IX	Drip and leakage connection		on bearing housing, right	G 1/2	G 3/8 for 32125– 65125 32200– 65200
Xa	Inlet connection for sealing liquid	external sealing	on the casing cover, bottom right hand side ¹⁾	G 1/4	G 1/8 for 32125– 65125 32160– 80160 32200– 65200 32250– 50250
Xb	Outlet connection for sealing liquid	external sealing	on the casing cover, top left hand side ²⁾	G 1/4	
Xle	Connection for intensive cooling – inlet	Intensive cooling of shaft seal	on the casing cover, bottom right hand side ¹⁾	G 1/4	–
XIf	Connection for intensive cooling – outlet	Intensive cooling of shaft seal	on the casing cover, top left hand side ²⁾	G 1/4	
XV	Oil filling		on top of bearing housing, centre	∅ 20 mm	–
XVI	Oil drain		on bearing housing, right	G 1/4	–
XVIIa	Oil level check		on bearing housing, right	G 1/2	–
XVIIb	Constant level oiler	Oil lubrication	on bearing housing, right	G 1/4	–

¹⁾ On the sizes fitted to bearing housing 45 "bottom left hand side"

²⁾ On the sizes fitted to bearing housing 45 "top right hand side"

for units with standard coupling

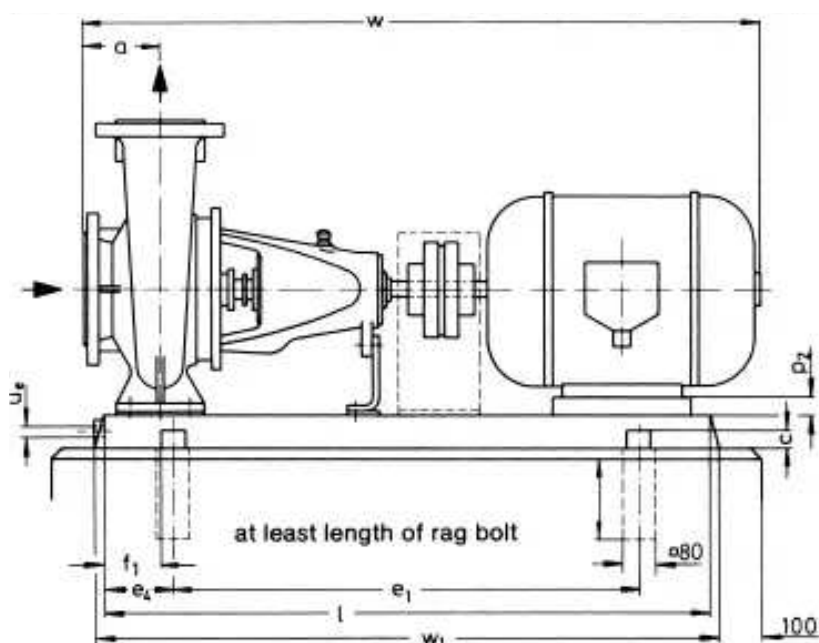

Dimensions in mm; general tolerances (bedplates) for cast parts to DIN 1686/GB 17, for welded parts to DIN 8570 B

$n = 2900$ rpm

Size	Motor		Bedplate No.	Coupling N-B	Weight		a	b ₁	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u _s	Rag bolt DIN 529						
	Size	kW			Pump kg	Compl. unit kg																						
32125	80	0,75	241	68	28	61 63 66 69	80	330	25	480	290	115	60	65	177	710		32	734	730		M 16 x 160						
	80	1,1																34	72 75 87 107				540	320	130	225	764	
	90 S	1,5																									784	
	90 L	2,2																									784	
32160	90 S	1,5	272	80	34	72 75 87 107	360			540	320	130	60	65	197	800		42	764	820		M 16 x 160						
	90 L	2,2																32	784									
	100 L	3																32	834									
	112 M	4																20	854									
32200	100 L	3	272	80	41	94 114 126 134	360			540	320	130	60	65	225	800		48	834	820		M 16 x 160						
	112 M	4																48	854									
	132 S	5,5																28	924									
	132 S	7,5																28	924									
32250	132 S	5,5	342	95	59	158 165 217 227 247	100	450	30	660	400	170	75	80	260	1000		48	944	1020	G 1/2	M 20 x 250						
	132 S	7,5	344															20	1074 1074 1124									
	160 M	11																										
	160 M	15																										
160 L	18,5																											
40125	80	1,1	241	68	29	65 67 71 84 102	80	330	25	480	290	115	60	65	177	710		32	734	730		M 16 x 160						
	80	1,5																36	91 109 122				540	320	130	225	764	
	90 L	2,2																									12	784
	100 L	3																									—	834
40160	100 L	3	272	80	36	91 109 122	360			540	320	130	60	65	197	800		32	834	820		M 16 x 160						
	112 M	4																20	854									
	132 S	5,5																—	924									
40200	132 S	5,5	344	95	44	130 137 202		450	30	660	400	170	75	80	240	1000		28	944	1020		M 20 x 250						
	132 S	7,5																20	1074 1074 1124									
	160 M	11																										
40250	160 M	11	S 385	110	61	219 234 249 324		490	40	740	440	190	75	110	290	1120		—	1074	1020		M 20 x 250						
	160 M	15																20	1074 1074 1124									
	160 L	18,5																										
	180 M	22																					—	1164				
50125	90 L	2,2	241	68	32	73 87 105 117 124	100	330	25	480	290	115	60	65	197	710		42	804	730		M 16 x 160						
	100 L	3																360	540				320	130	225	854		
	112 M	4																								20	874	
	132 S	5,5																								—	944	
50160	132 S	5,5	272	80	38	123 130 196 206		360	25	5																		

NOW



Bedplate drawing
for units with standard coupling

n = 2900 rpm

Size	Motor		Bedplate No.	Coupling N-B	Weight		a	b ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u _g	Rag bolt DIN 529																																						
	Size	kW			Pump kg	Compl. unit kg																																																						
65125	132 S	5.5	303	95	39	131	100	390	25	600	350	150	75	65	225	900	-	28	944	920	G 1/2	M 16 x 160																																						
	132 S	7.5	138			944																																																						
	160 M	11	197			1074													1020			M 20 x 250																																						
65160	132 S	7.5	303		43	142		390	25	600	350	150		65	225	900		28	944	920		1074	1074	1020	M 16 x 160																																			
	160 M	11	201			1074																				1020	M 20 x 250																																	
	160 M	15	211																									1074	1020	M 20 x 250																														
65200	160 M	15	344	52	220	450		30	660	400	170	80	240	1000	20	1074	1124	1164	1254	-	-	M 20 x 250																																						
	160 L	18.5			240																		110	125	315	370	290	1120	20	-	1274	1364	1364	1404	1514																									
	180 M	22			315		110																													125	315	370	290	1120	20	-	1274	1364	1364	1404	1514													
65250	200 L	30	S 385	125	81	490		40	740	440	190	110	310	1250	25	-	1274	1364	1364	1404	1514	-	-	M 24 x 400																																				
	200 L	37					S 386																		125	409	840	550	205	100	325	25	-	1274	1364	1364	1404	1514																						
	225 M	45																																					S 486	140	531	610	550	205	100	325	25	-	1274	1364	1364	1404	1514							
	250 M	55																																																				S 607	140	698	740	940	690	230
80160	160 M	11	344	95	53	211	125	450	30	660	400	170	75	80	260	1000	-	20	1100	1020	G 1/2	M 20 x 250																																						
	160 M	15				221													1100																																									
	160 L	18.5				241													1150																																									
80200	160 L	18.5	S 385	110	70	241		490	740	440	190	110		290	1120	20	-	20	1150	1280			1260	1300	1390	1430	M 24 x 400																																	
	180 M	22				316													110									125	398	418	520	610	840	550	205	100	325	1250	45	-	1390	1390	1430	1540	1660															
	200 L	30				333																																								110	125	398	418	520	610	840	550	205	100	325	1250	45	-	1390
80250	200 L	30	S 386	125	91	298		490	40	740	440	190	90	110	310	1250	25	-	1260	1390	1390	1430	1540	1660																																				
	200 L	37				333													110						125	398	418	520	610	840	550	205	100	325	1250	45	-	1300	1390	1390	1430	1540	1660																	
	225 M	45				398	110																															125						398	418	520	610	840	550	205	100	325	1250	45	-	1390	1390	1430	1540	1660
	250 M	55				418																																																		110				
100160	280 S	75	S 607	140	906	740	940	690	230	100	350	1400	50	1514																																														
	200 L	30	S 386	125	91	419	490	40	740	440	190	90	110	310	1250	25	-	1390	1390	1430	1540	1660																																						
	200 L	37				439												110					125	708	906	740	940	690	230	100	350	1400	50	80	1390	1390	1430	1540	1660																					
	225 M	45				541																													110					125	708	906	740	940	690	230	100	350	1400	50	80	1430	1390	1390	1430	1540	1660			
100200	250 M	55	S 607	160	906	740																																														940						690	230	100
	160 L	18.5	S 385	110	72	300	490	40	740	440	190	90	110	310	1120	20	40	1222	-	-	M 20 x 250																																							
	180 M	22				322											110	125				413	433	535	702	895	740	940	690	230	100	350	1400	50	80	1244																								
	200 L	30				417																														110	125	413	433	535	702	895	740	940	690	230	100	350	1400	50	80	1359								
200 L	37	427	110	125	413	433																																														535	702	895	740	940	690	230	100	350
100250	160 M	22					S 386	125	85	348	490	40	740	440	190	90	110	310	1120	20	1300	1390	1390	1430	1540	1660																																		
	200 L	30	413	110	125	413				433											535						702	895	740	940	690	230	100	350	1400	50	80	1390																						
	200 L	37	433																																			110	125	413	433	535	702	895	740	940	690	230	100	350	1400	50	80	1430						
	225 M	45	535				110	125	413																																													433	535	702	895	740	940	690
100250	250 M	55	S 486	125	103	702				610	40	740	440	190	90	110	310	1120	20	1430	1540	1660																																						
	280 S	75				895	110	125	413											433			535	702	895	740	940	690	230	100	350	1400	50	80	1540																									
	280 M	90				973																													110	125	413	433	535	702	895	740	940	690	230	100	350	1400	50	80	1540									
	315 S	110	1176	110	125	413																																													433	535	702	895	740	940	690	230	100	350
125200	250 M	55	S 608 A				160	95	677	140	740	40	940	690	230	90	110	310	1120	20	1444	1554	1674	1704	1784																																			
	280 S	75		858	110	125			413												433					535	702	895	740	940	690	230	100	350	1400	50	80	1539																						
	280 M	90		903																																		110	125	413	433	535	702	895	740	940	690	230	100	350	1400	50	80	1612						
				110			125	413																																														433	535	702	895	740	940	690

* Dimensions for motor with enclosure IP 54, make of motor to our choice

Bedplate drawing for units with standard coupling

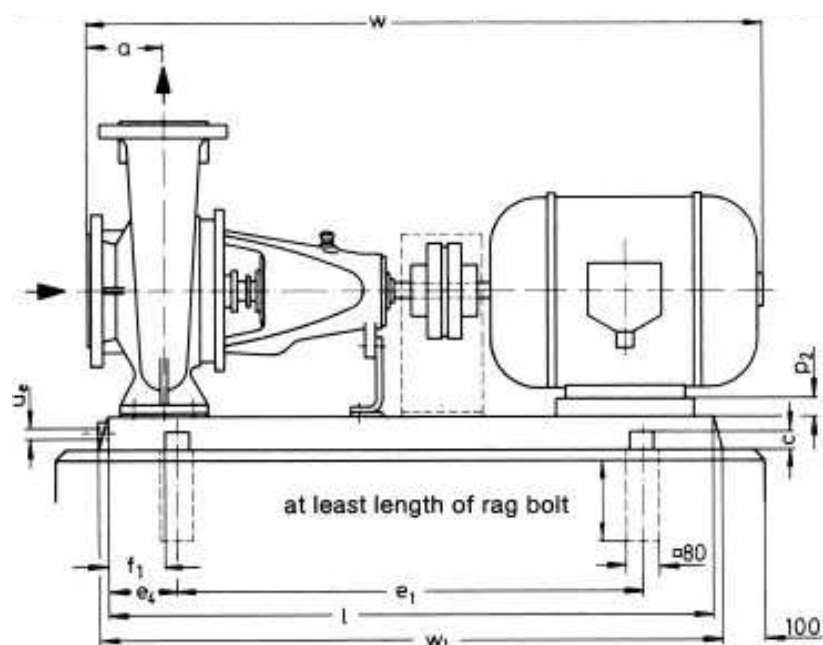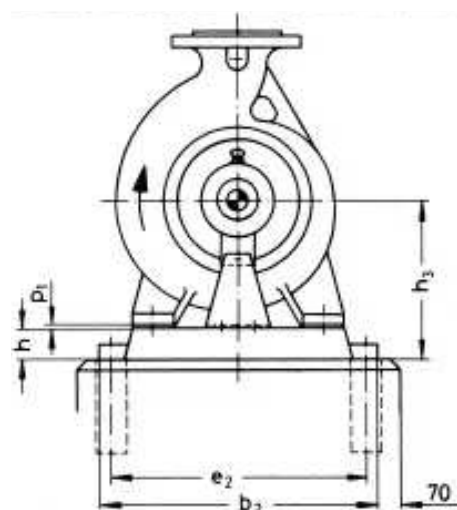

$n = 1450 \text{ rpm}$

Dimensions in mm; general tolerances (bedplates) for cast parts to DIN 1686/GB 17, for welded parts to DIN 8570 B

Size	Motor Size	Motor kW	Bedplate No.	Coupling N-B	Weight Pump kg	Weight Compl. unit kg	a	b ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u _c	Rag bolt DIN 529
32125	71 80	0.37 0.55	241	68	28	60 62	80	330	25	480	290	115	60	65	177	710			41 32	694 734	730	M 16 x 160
32160	71 80 80	0.37 0.55 0.75			34	65 67 70													61 52	694 734 734		
32200	80 80 90 S	0.55 0.75 1.1			41	78 80 83													80 70	734 734 784		
32250	90 S 90 L 100 L	1.1 1.5 2.2	342	80	59	115 118 125	100	450	30	540	400	130	75	80	260	800			90 80	784 804 854	820	M 20 x 250
40125	71 80	0.37 0.55	241	68	29	61 63	80	330	25	480	290	115	60	65	177	710			41 32	694 734	730	M 16 x 160
40160	80 80	0.55 0.75			36	70 78													52	734 734		
40200	80 90 S 90 L	0.75 1.1 1.5	301		44	79 86 89													80 70	754 784 804		
40250	90 S 90 L 100 L 100 L	1.1 1.5 2.2 3	342	80	61	117 120 127 129	100	450	30	540	400	130	75	80	260	800			90 80	784 804 854 854	820	M 20 x 250
40315	100 L 100 L 112 M 132 S	2.2 3 4 5.5	S 385		89	201 203 221 233													125 113 1009 93	989 989 1009 1079		
50125	80 80 90 S	0.55 0.75 1.1	241	68	32	66 68 71		330	25	480	290	115	60	65	197	710			52 42	754 754 784	730	M 16 x 160
50160	80 90 S 90 L	0.75 1.1 1.5	301		38	77 80 83													80 70	754 784 804		
50200	90 S 90 L 100 L 100 L	1.1 1.5 2.2 3	272		46	88 91 99 101													60	784 804 854 854	820	M 20 x 250
50250	100 L 100 L 112 M 132 S	2.2 3 4 5.5	342	80	63	129 131 149 169		450	30	540	400	130		80	260	800			80 68 48	854 854 874 944		
50315	112 M 132 S 132 M	4 5.5 7.5	S 385	95	80	176 195 211													113 93	981 1039 1077		
65125	80 90 S 90 L	0.75 1.1 1.5	301	68	39	79 81 92		390	25	480	350	150	75	65	225	900			80 70	754 784 804	730	M 16 x 160
65160	90 L 100 L	1.5 2.2	303		43	96 102													60	804 854	820	M 20 x 250
65200	100 L 100 L 112 M 132 S	2.2 3 4 5.5	342	80	52	118 120 138 250													80 68 48	854 854 874 944		



Bedplate drawing

for units with standard coupling

n = 1450 rpm

Size	Motor		Bedplate No.	Coupling N - B	Pump kg	Weight Compl. unit kg	a	b ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u ₂	Rag bolt DIN 529																
	Size	kW																																				
65250	112 M	4	S 385	80	81	213 225 237	100	490	40	740	440	190	90	110	310	1120			88	984	-	-																
	132 S	5.5		95															100	245 257 296 326													68	1054 1094				
	132 M	7.5																															93	1080 1120 1210 1260				
65315	132 S	5.5	S 385	95	100	245 257 296 326	125	490	40	740	440	190	90	110	335	1120			90	830	820	G 1/2	M 20 x 250															
	132 M	7.5																	118 120 138													80	880 880 900					
	160 M	11																														68	990 1010 1080					
80160	90 L	1.5	342	68	53	112 118 120 138	125	450	30	540	400	130	75	80	260	800			90	830	820	G 1/2	M 20 x 250															
	100 L	2.2		80															202 214													80	880 880 900					
	100 L	3																														68	990 1010 1080					
80200	100 L	3	S 385	95	70	184 202 214	125	490	40	740	440	190	90	110	310	1120			80	990	-	-																
	112 M	4																	244 248 287													68	1010 1080					
	132 S	5.5																														48	1080					
80250	132 S	5.5	S 385	95	91	244 248 287	125	490	40	740	440	190	90	110	310	1120			68	1080	-	-																
	132 M	7.5																	315 335													40	1210					
	160 M	11																														90	1210 1260					
80315	160 M	11	S 486	110	107	315 335	125	610		840	550	205	80	100	380	1250			90	1210	-	-	M 24 x 400															
	160 L	15																	390 415 430 509													120	1319 1359 1399 1449					
	180 M	18.5																														100	1359 1399 1449					
80400	180 L	22	S 486	125	154	430 509	125	610		840	550	205	80	100	380	1250			80	1449	-	-	M 24 x 400															
	200 L	30																	146 148 168 187													100	1319 1359 1399 1449					
																																80	1449					
100160	100 L	2.2	S 385	80	72	146 148 168 187	140	490	40	740	440	190	90	110	310	1120			100	981	-	-	M 20 x 250															
	100 L	3		95															138 150 162 201													88	981					
	112 M	4																														168	68	1039				
100200	112 M	4	S 385	95	85	138 150 162 201	140	490	40	740	440	190	90	110	310	1120			88	1010	-	-	M 20 x 250															
	132 S	5.5																	262 301 331													68	1080 1120 1210					
	132 M	7.5																														40	1210					
100250	132 M	7.5	S 385	95	103	262 301 331	140	490	40	740	440	190	90	110	335	1120			93	1134	-	-	M 20 x 250															
	160 M	11																	344 379 409													65	1274					
	160 L	15																														90	1274					
100315	160 L	15	S 386	110	116	344 379 409	140	610		840	550	205	110	106	380	1250			70	1314 1354	-	-	M 24 x 400															
	180 M	18.5																	126 1284 1334 1374 1414 1464 1484													126	1284 1334 1374 1414 1464 1484					
	180 L	22																														106	1374 1414 1464 1484					
100400	160 M	11	S 486 A	95	166	385 405 440 460 506 599	140	610		840	550	205	110	106	380	1400			86	1464	-	-	M 24 x 400															
	160 L	15																	405 440 460 506 599													61	1484					
	180 M	18.5																														106	1374 1414 1464 1484					
125200	132 M	7.5	S 385	95	95	229 278 299	140	490	40	740	440	190	90	110	360	1120			118	1092 1193 1237	-	-	M 20 x 250															
	160 M	11		110															318 338 373 403													90	1224 1274 1314 1354					
	160 L	15																														70	1354					
125250	160 M	11	S 386	95	110	318 338 373 403	140	610		840	550	205	110	106	380	1250			126	1334	-	-	M 24 x 400															
	160 L	15																	519 609 639 801													106	1374 1414 1464 1484					
	180 M	18.5																														86	1464					
125315	160 L	15	S 486 A	110	145	383 418 438 486	140	610		840	550	205	110	106	380	1250			121	1464	-	-	M 24 x 400															
	180 M	18.5																	519 609 639 801													96	1484 1504 1614					
	200 L	30																														65	1614					
125400	200 L	30	S 487 A	140	177	519 609 639 801	140	610		840	550	205	110	106	380	1400			96	1484 1504 1614	-	-	M 24 x 400															
	225 S	45																	317 364 385 412													65	1614					
	250 M	55																														148	1112 1213 1257 1279					
150200	132 M	7.5	S 607	95	116	317 364 385 412	140	740	40	940	690	230	110	100	380	1250			120	1257 1279 1317 1394	-	-	M 24 x 400															
	160 M	11																	110					391 417 431 511													100	1257 1279 1317 1394
	160 L	15																																			100	1257 1279 1317 1394
150250	160 L	15	S 486 A	95	121	391 417 431 511	140	610		840	550	205	110	106	380	1250			120	1257 1279 1317 1394	-	-	M 24 x 400															
	180 M	18.5																	496 551 624 654 783													100	1434 1484 1504 1524 1634					
	200 L	30																														80	1394					
150315	180 L	22	S 607	125	159	496 551 624 654 783	140	740		940	690	230	110	100	380	1400			100	1434 1484 1504 1524 1634	-	-	M 24 x 400															
	200 L	30																	706 831 1021 1081													55	1524 1634 1754 1784					
	225 S	45																														90	1524 1634 1754 1784					
150400	225 M	45	S 608	160	207	706 831 1021 1081	140	740		940	690	230	110	100	415	1400			90	1524 1634 1754 1784	-	-	M 24 x 400															
	250 M	55																	1060													65	1634 1754 1784					
	280 S	75																														35	1784					
200250	160 M	11	S 486 A	95	186	402 425 450 465 552	140	610		840	550	205	100	106	380	1250			126	1352 1402 1442 1482 1532	-	-	M 24 x 400															
	160 L	15																	110					402 425 450 465 552													106	1402 1442 1482 1532
	180 M	18.5																																			106	1402 1442 1482 1532

Bedplate drawing for units with spacer coupling

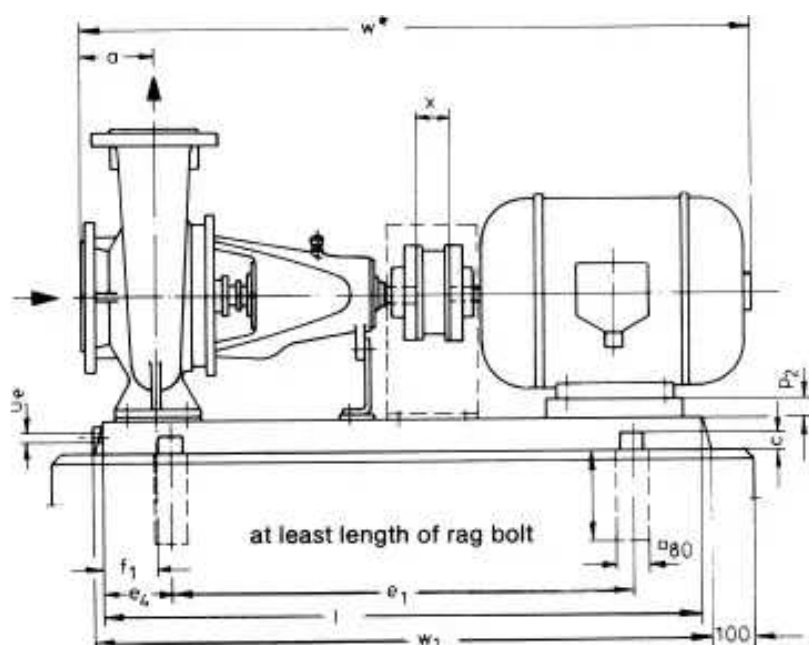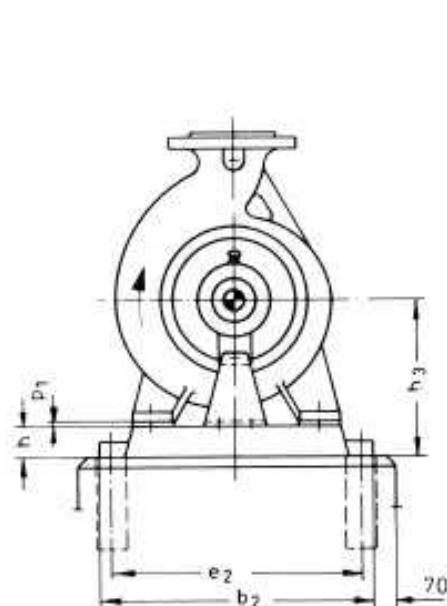

Dimensions in mm; general tolerances (bedplates) for cast parts to DIN 1686/GTB 17, for welded parts to DIN 8570 B

n = 2900 rpm

Size	Motor		Bedplate No.	Coupling N-B	Weight		a	D ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u ₆	x	Rag bolt DIN 529	
	Size	kW			Pump kg	Compl. unit kg																		
32125	80	0,75	272	80	28	65	80	360	25	540	320	130	60	65	177	800	-	32	870	820	G1/2	140	M 16 x 160	
	80	1,1				67																		
	90 S	1,5				69																		
	90 L	2,2				79																		
32160	90 S	1,5	272		75	360	540	320	130	800	42	900	820											
	90 L	2,2	86		390	600	350	150	900	32	970	920												
	100 L	3	92		60	350	150	225	60	970	920													
	112 M	4	109		48	990	1060																	
32200	100 L	3	303		41	105	390	600	350	150	225	900	60	970	920									
	112 M	4				117																		
	132 S	5,5				135																		
	132 S	7,5				142																		
32250	132 S	5,5	344	95	59	168	100	450	30	660	400	170	75	80	260	1000	48	1080	1020					
	132 S	7,5				175																		
	160 M	11				261																		
	160 M	15				268																		
	160 L	18,5				289																		
40125	80	1,1	272		80	29	69	80	360	25	540	320	130	60	65	177	800	-	32	870	820	G1/2	140	M 16 x 160
	90 S	1,5					72																	
	90 L	2,2					85																	
	100 L	3					91																	
	112 M	4					109																	
40160	100 L	3	303	36		98	390	600	350	150	225	900	32	970	920									
	112 M	4				116																		
	132 S	5,5				131																		
	132 S	5,5				139																		
40200	132 S	7,5	303	44		146	450	40	740	440	190	75	110	290	1120	28	1080		1210	-	-			
	160 M	11				246																		
	160 M	11				264																		
40250	160 M	15	S 385	61	272	490	40	740	440	190	75	110	290	1120	20	1210	-	-						
	160 L	18,5			291																			
	180 M	22			322																			
	90 L	2,2			84																			
50125	100 L	3	303	80	32	91	100	390	25	600	350	150	60	65	197	900	-	42	940	920	G1/2	140	M 16 x 160	
	112 M	4				107																		
	132 S	5,5				128																		
	132 S	7,5				135																		
	132 S	5,5				134																		
50160	132 S	7,5	303		38	141	390	25	600	350	150	60	65	225	900	28		1080	1210	-				-
	160 M	11				241																		
	160 M	15				249																		
	160 M	11				249																		
50200	160 M	15	S 385		46	257	490	40	740	440	190	75	110	290	1120	20		1260	-	-				
	160 L	18,5				278																		
	160 M	15				274																		
50250	160 L	18,5	S 385	63	295	490	40	840	205	75	310	1250	20	-	1390	-	-							
	180 M	22			327																			
	200 L	30			402																			
	200 L	37			422																			



Bedplate drawing
for units with spacer coupling

n = 2900 rpm

Size	Motor		Bedplate No.	Coupling N-B	Weight Pump kg	Compl. unit kg	a	b ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u _e	x	Rag bolt DIN 529												
65125	132 S	5,5	344	95	39	151	100	450	30	660	400	170	75	80	240	1000	-	28	1080	1020	G 1/2	140	M 20 x 250												
	132 S	7,5				158																		490	40	740	440	190	110	270	1120	-	1210	-	-
	160 M	11				252																													
65160	132 S	7,5	344		43	161	100	450	30	660	400	170		270	-	-	1210	28	1080	1020	G 1/2			-	-	-									
	160 M	11																									245								
	160 M	15																									253								
65200	160 M	15	S 385		52	263	100	490	740	190	205	90		310	1250	20	-	1390	1410	1500	1540			1650	-	-	-								
	160 L	18,5																										283							
	180 M	22																										315							
	200 L	30		388																															
	200 L	30		354																															
65250	200 L	37	S 387	125	429	100	510	940	450	230	90	1400	-	-	1500	1540	1650	-	-	-	-	-	-												
	225 M	45																						548											
	250 M	55																						683											
	250 M	55																						683											
	250 M	55																						683											
80160	160 M	11	S 385	95	53	125	490	740	190	205	90	310	1250	20	-	1395	1435	1525	1500	1565	1675	1795	-	-	-										
	160 M	15																								263									
	160 L	18,5																								283									
	180 M	22																								315									
	200 L	30																								389									
80200	160 L	18,5	S 386	95	70	125	610	840	440	205	90	310	1250	20	-	1395	1435	1525	1500	1565	1675	1795	-	-	-										
	180 M	22																								344									
	200 L	30																								418									
	200 L	37																								438									
	225 M	45																								535									
80250	200 L	30	S 387	125	439	510	940	450	230	90	310	1250	20	-	1525	1500	1565	1675	1795	1525	1500	1565	1675	1795	-	-	-								
	200 L	37																										459							
	225 M	45																										557							
	250 M	55																										736							
	280 S	75																										929							
100160	160 L	18,5	S 386	95	72	125	490	840	440	205	90	310	1250	20	-	1395	1465	1555	1435	1525	1500	1565	1675	1795	-	-	-								
	180 M	22																										345							
	200 L	30																										411							
	200 L	37																										441							
	200 L	37																										441							
100200	180 M	22	S 386	110	85	125	490	840	440	205	90	310	1250	20	-	1395	1465	1555	1435	1525	1500	1565	1675	1795	-	-	-								
	200 L	30																										414							
	200 L	37																										434							
	225 M	45																										553							
	250 M	55																										729							
100250	280 S	75	S 608	140	923	610	940	550	230	90	310	1250	20	-	1525	1500	1565	1675	1795	1525	1500	1565	1675	1795	-	-	-								
	225 M	45																										568							
	250 M	55																										748							
	280 S	75																										943							
	280 M	90																										1003							
125200	315 S	110	S 608	160	1203	140	740	1060	690	270	90	310	1250	20	-	1525	1500	1565	1675	1795	1525	1500	1565	1675	1795	-	-	-							
	250 M	55																											742						
	280 S	75																											936						
	280 M	90																											996						
	280 M	90																											996						

* Dimensions for motor with enclosure IP 54, make of motor to our choice

Bedplate drawing for units with spacer coupling

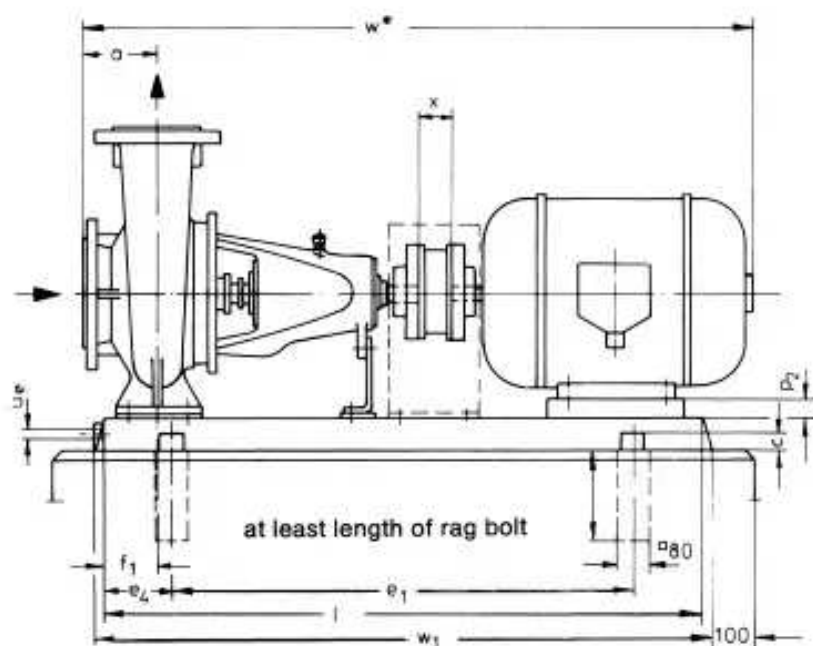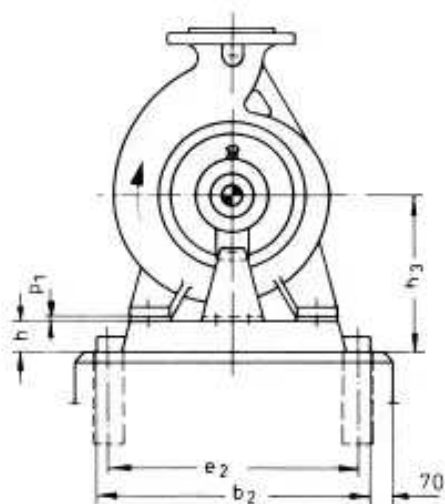

Dimensions in mm; general tolerances (bedplates) for cast parts to DIN 1686/GB 17, for welded parts to DIN 8570 B

n = 1450 rpm

Size	Motor		Bedplate No.	Coupling N-B	Weight		a	b ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u _g	x	Rag bolt DIN 529																
	Size	kW			Pump kg	Compl. unit kg																																	
32125	71	0,37	272	80	28	64	80	360	25	540	320	130	60	65	177	800			41	830	820			M 16 x 160															
	80	0,55				67													32	870																			
32160	71	0,37			34	71													61	830																			
	80	0,55				74													52	870																			
32200	80	0,75			76	82													52	870																			
	80	0,55																	80	870																			
	80	0,75	84		80	870																																	
	90 S	1,1			89	70	900																																
32250	90 S	1,1	59		132	90	920	1020																M 20 x 250															
	90 L	1,5			137	90	940																																
	100 L	2,2			143	90	990																																
40125	71	0,37	272		29	68	80	360	25	540	320	130	60	65	177	800			41	830	820				M 16 x 160														
	80	0,55				71													32	870																			
40160	80	0,55			36	81									52				870																				
	80	0,75				83									52				870																				
40200	80	0,75			44	91									80				890																				
	90 S	1,1				102									90				920																				
	90 L	1,5	112			90	940																																
40250	90 S	1,1	61		132	100	450	30	660	400	170	75	80	260	1000			90	920	1020				M 20 x 250															
	90 L	1,5																135	90						940														
	100 L	2,2																141	80						990														
	100 L	3																144	80						990														
40315	100 L	2,2	S 385		89	215	125	490	40	740	440	190	110	310	1120			100	1125																				
	100 L	3																218	88							1145													
	112 M	4																238	68							1215													
	132 S	5,5																248																					
50125	80	0,55	272		80	32	72	360		540	320	130	60	65	197	800			52	890	820				M 16 x 160														
	80	0,75		74			42												920																				
	90 S	1,1		78			80								890																								
50160	80	0,75		38		82	70								920																								
	90 S	1,1				86	70								940																								
	90 L	1,5				98	920																																
50200	90 S	1,1	46	95		390	25	600	350	150	60	65	225	900			70	940	920	820																			
	90 L	1,5		360		540	320	130	800	70							920																						
	100 L	2,2		360		540	320	130	800	70			940																										
	100 L	3		390		600	350	150	900	60			990																										
50250	100 L	2,2	63	118		100	450	30	660	400	170	80	260	1000					80	990	1020																		
	100 L	3		148															80	990																			
	112 M	4		151											68	1010																							
	132 S	5,5		173											48	1080																							
50315	112 M	4	S 385	80		225	125	490	40	740	440	190	110	335	1120			113	1145																				
	132 S	5,5				235												93	1215																				
	132 M	7,5				253												93	1255																				
65125	80	0,75	303	80	39	96	390	25	600	350	150	75	65	225	900			80	890	920				M 16 x 160															
	90 S	1,1				102												70	920																				
	90 L	1,5				107								70				940																					
65160	90 L	1,5			43	115								100				450	30						660	400	170	80	260	1000			70	940	1020				
	100 L	2,2				124																											60	990					
65200	100 L	2,2			52	136								100				450	30						660	400	170	80	260	1000			80	990	1020				
	100 L	3	139			68	1010																																
	112 M	4	159			48	1080																																
	132 S	5,5	168																																				

Bedplate drawing for units with spacer coupling

n = 1450 rpm

Size	Motor		Bedplate No.	Coupling N-B	Weight		a	b ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u ₀	x	Rag bolt DIN 529		
	Size	kW			Pump kg	Compl. unit kg																			
65250	112 M	4	S 385	95	81	219	100	490	40	740	440	190	90	110	310	1120			88	1120	-	-			
	132 S	5				226													68	1190					
	132 M	7,5				245													93	1230					
65315	132 S	5,5	S 386	110	100	249	125	490	40	840	205		90	110	335	1250			1215	-	-				
	132 M	7,5				265													85					1255	
	160 M	11				311													85					1345	
	160 L	15				338												1395							
80160	90 L	1,5	344	80	53	126	125	450	30	660	400	170	75	80	260	1000			90	965	1020	G1/2		M 20 x 250	
	100 L	2,2				132													80	1015					
	100 L	3				135													80	1035					
80200	112 M	4	S 385	95	70	154	125	490	30	740	190		75	80	260	1000			68	1035	1020	G1/2		M 20 x 250	
	100 L	3				196													80	1125					
	112 M	4				213													68	1145					
80250	132 S	5,5	S 386	110	91	222	125	490	30	740	190		75	80	260	1000			48	1215	1020	G1/2		M 20 x 250	
	132 M	7,5				244													68	1215					
	160 M	11				259													40	1345					
80315	160 M	11	S 487	125	107	326	125	490	30	840	205		75	80	260	1000			90	1345	1020	G1/2		M 20 x 250	
	160 L	15				350													90	1395					
	160 L	15				403													120	1455					
80400	180 M	18,5	S 487	125	154	449	125	490	30	840	205		75	80	260	1000			100	1495	1020	G1/2		M 20 x 250	
	180 L	22				473													80	1535					
	200 L	30				511													80	1585					
100160	100 L	2,2	S 385	95	72	200	125	490	30	740	190		75	80	260	1000			100	1155	1020	G1/2		M 20 x 250	
	100 L	3				204													88	1175					
	112 M	4				215													68	1245					
100200	132 S	5,5	S 386	110	85	224	125	490	30	740	190		75	80	260	1000			88	1145	1020	G1/2		M 20 x 250	
	112 M	4				229													68	1215					
	132 S	5,5				242													40	1345					
100250	132 M	7,5	S 386	110	103	258	125	490	30	840	205		75	80	260	1000			65	1270	1020	G1/2		M 20 x 250	
	160 M	11				304													40	1345					
	132 M	7,5				278													65	1270					
100315	160 M	11	S 387	125	116	324	125	490	30	840	205		75	80	260	1000			40	1360	1020	G1/2		M 20 x 250	
	160 L	15				349													90	1410					
	160 L	15				365													90	1410					
100400	180 M	18,5	S 487 A	125	166	407	125	490	30	840	205		75	80	260	1000			70	1450	1020	G1/2		M 20 x 250	
	180 L	22				443													120	1490					
	160 M	11				397													120	1420					
100400	160 L	15	S 608	140	166	425	125	490	30	840	205		75	80	260	1000			100	1510	1020	G1/2		M 20 x 250	
	180 M	18,5				469													100	1550					
	180 L	22				494													80	1600					
	200 L	30				576												55	1630						
	225 S	37				669													118	1310					
125200	132 M	7,5	S 385	110	95	271	140	490	40	740	190		90	110	360	1250			90	1400	-	-	180	M 20 x 250	
	160 M	11				316													90	1450					
	160 L	15				339													90	1450					
125250	160 M	11	S 386	95	110	334	140	490	40	840	440	205	90	110	360	1250			90	1360	-	-	180	M 20 x 250	
	160 L	15				355													90	1410					
	180 M	18,5				369													70	1450					
125315	180 L	22	S 387	125	145	436	140	490	40	840	440	205	90	110	360	1250			120	1470	-	-	140	M 20 x 250	
	160 L	15				404													100	1510					
	180 M	18,5				447													80	1600					
125400	200 L	30	S 487 A	110	145	473	140	490	40	840	440	205	90	110	360	1250			115	1600	-	-	140	M 20 x 250	
	200 L	30				556													90	1610					
	225 S	37				586													65	1750					
150200	225 M	45	S 608	140	177	710	160	740	40	1060	690	270	110	100	380	1600			90	1640	-	-	180	M 20 x 250	
	250 M	55				795													65	1750					
	132 M	7,5				339													148	1330					
150250	160 M	11	S 607	110	116	379	160	610	40	940	230		110	100	380	1600			120	1420	-	-	180	M 20 x 250	
	160 L	15				406													120	1470					
	180 M	18,5				452													100	1510					
150315	180 L	22	S 487 A	125	121	488	160	740	40	940	230		110	100	380	1600			120	1470	-	-	180	M 20 x 250	
	200 L	30				535													100	1510					
	200 L	30				569													80	1620					
150400	225 S	37	S 608	140	159	665	160	740	40	1060	690	270	110	100	380	1600			55	1660	-	-	140	M 20 x 250	
	225 M	45				694													30	1770					
	250 M	55				778													65	1770					
200250	280 S	75	S 487 A	125	186	989	160	740	40	1060	690	270	110	100	380	1600			90	1660	-	-	200	M 20 x 250	
	280 M	90				1079													35	1890					
	160 M	11				422													120	1548					
	160 L	15	S 608	125	186	449	160	740	40	940	550	230	110	100	380	1600			100	1638	-	-	200	M 20 x 250	
180 M	18,5	495				80													1678						
180 L	22	566				80													1728						
	200 L	30				614												80	1728						

* Dimensions for motor with enclosure IP 54, make of motor to our choice

NOW

Data for pump size – Instructions for ordering

Type+Size	Hydraulic	Bearings+Direction of rotation	Shaft seal	Construction materials	Casing gasket	Oil level indicator
	A	C Bearing housings 25 and 35¹⁾: two deep groove ball bearings in accordance with DIN 625. Oil lubrication. Bearing housing 45: one twin row contact ball bearing in accordance with DIN 628 at the pump end, and one deep groove ball bearing in accordance with DIN 625 at the drive end. Oil lubrication. B One twin row contact ball bearing in accordance with DIN 628 at the pump end, and one deep groove ball bearing in accordance with DIN 625 at the drive end. Grease Lubrication.	041 Self-sealing uncooled soft packed stuffing box. 051 Uncooled soft packed stuffing box with sealing fluid from an outside source and flushing. 501 Soft packed stuffing box for intensive cooling. BKW: Unbalanced single mechanical seal of elastomeric bellows design, NBR, with self-contained circulation. BKS: Unbalanced single mechanical seal with elastomeric bellows, FKM, with self-contained circulation. BK3: Unbalanced single mechanical seal of elastomeric bellows design, EPDM, with self-contained circulation.	0B Main components of 0.6025 0C As 0B but impeller of 2.1050.01 shaft sleeve of 2.1050.02 0E As 0B, but impeller of 1.4408 0R As 0B, but shaft of 1.4021 0S As 0C, but shaft of 1.4021 0U As 0E, but shaft of 1.4021 3B Main components of 2.1050.01, shaft of 1.4571	2 Flat gasket 3 Confined gasket	1 Oil sight glass 2 Constant Level Oiler
32125 NOWC . . . 200250	A	Alternatively B C	Alternatively 041 051 501 BKW BKS BK3	Alternatively 0B 0C 0E 0R 0S 0U 3B	Alternatively 2 3	Alternatively 1 2

¹⁾ For grease lubrication on the pump side a double row angular contact ball bearing to DIN 628, on the drive side a deep groove ball bearing to DIN 625.

This construction is also possible for oil lubrication as a reinforced bearing arrangement.

Extent of supply	Designation	Motor selection table					
Pump with free shaft end	01	Three phase motor n = 2900 rpm			Three phase motor n = 1450 rpm		
		kW	Size	Designation	kW	Size	Designation
Pump with coupling, finish bored on motor side and with coupling guard	41	0,75	80	FA	0,37	71	EB
		1,1	80	GA	0,55	80	FB
		1,5	90 S	HA	0,75	80	GB
		2,2	90 L	JA	1,1	90 S	HB
As above, but pump and coupling guard mounted on bedplate, including shims for pump or motor and one set of rag bolts	53	3	100 L	KA	1,5	90 L	JB
		4	112 M	MA	2,2	100 L	KB
		5,5	132 S	NA	3	100 L	LB
		7,5	132 S	OA	4	112 M	MB
		11	160 M	SA	5,5	132 S	NB
		15	160 M	TA	7,5	132 M	PB
As above, but with motor e.g. 18.5 kW three phase motor (50 Hz, 380/660 V) at 2900 rpm	e.g. UA	18,5	160 L	UA	11	160 M	SB
		22	180 M	VA	15	160 L	UB
		30	200 L	XA	18,5	180 M	VB
		37	200 L	YA	22	180 L	WB
		45	225 M	AA	30	200 L	XB
		55	250 M	BA	37	225 S	ZB
		75	280 S	CA	45	225 M	AB
		90	280 M	DA	55	250 M	BB
		110	315 S	EA	75	280 S	CB
					90	280 M	DB

Example of order

For pump size NOWC 80160 AC 501 0B 3 1 with coupling finish bored on motor side and with coupling guard the full order number is

NOWC 80160 AC 501 0B 3 1 41

For pump size NOWC 80160 AC 501 0B 3 1 as complete unit with 18.5 kW three phase motor, 2900 rpm, the full order number is

NOWC 80160 AC 501 0B 3 1 UA

When ordering the extent of supply corresponding to 41 and 53, please state the motor selected in all cases so that the coupling can be finish bored on the motor side, the correct bedplate selected and the right shims provided.

Subject to modification without notice to incorporate technical improvements.

END SUCTION PUMPS PERFORMANCE CURVES

