



euroflow
**Horizontal Stainless Steel
End Suction Centrifugal Pump**

SZS/SZSS

50HZ OR 60HZ



SZB/SZBS

Horizontal Stainless Steel
End Suction Centrifugal Pump

APPLICATIONS

- General water supply
- Cooling water system
- Sprinkler system
- Agriculture
- Boosting & circulation systems
- Water treatment
- Medicine & sanitation
- Petrochemical industry
- Fire fighting system

OPERATING LIMITS

- Flow rate up to 200m³/h
- Head up to 74m
- Max operating pressure: 10bar
- Water temperaturer: -20°C- +100°C
- Max ambient temperaturer: +50°C

DESIGN

Hydraulic parts

All stainless steel horizontal single stage not self-priming design, suitable for various mediums including water or industrial liquid. Manufactured in AISI316 or AISI304 stainless steel in compliance with EN733 DIN24255. The assembly dimensions of the mechanical seal are in compliance with DIN24960-ISO3069. Pump with stub shaft and standard motor.

Electric motor

The pump is coupled with a totally enclosed, fan-cooled squirrel-cage aluminum casing(less than 7.5kw) IEC standard motor built-in thrermal overload unit.

Enclosure class: IP55

Speed: 2900rpm or 3500rpm

Insulation class: F

Standard voltage: 1x220-240V, 50hz or 60hz
3x220-240/380-415V, 50hz or 60hz

Sound level: <75dB(A)


MODEL CODE

SZS 50 - 32 - 200/5.5

- Motor power (kW)
- Impeller nominal diameter (mm)
- Diameter of discharge port (mm)
- Diameter of suction port (mm)
- Series name:
SZS-50Hz stub shaft type
SZSS-60Hz stub shaft type

SZB-50Hz monoblock type
SZBS-60Hz monoblock type(up to 65-50-200)



GENERAL ARRANGEMENT DRAWING AND MATERIAL

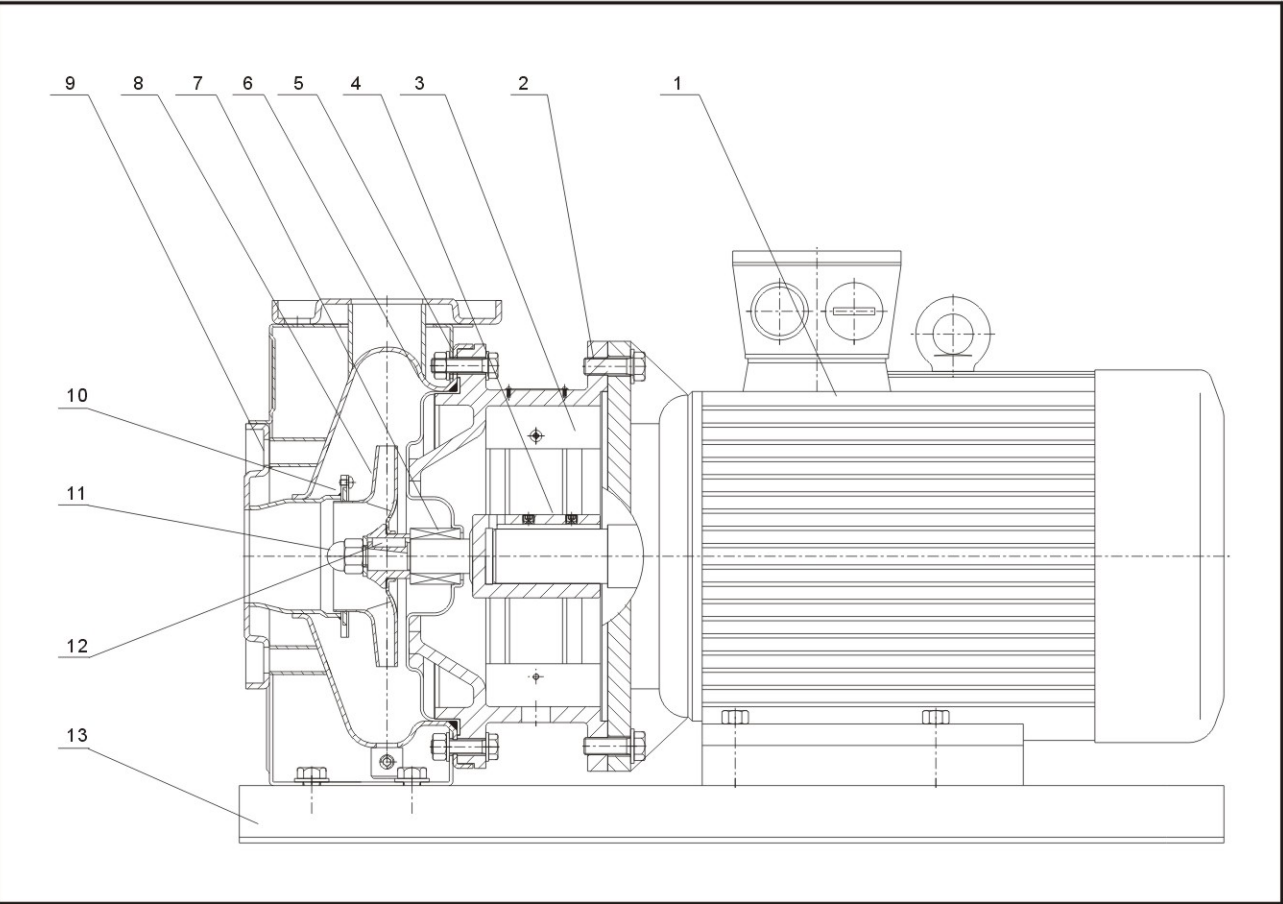

Part No.	Name	Material	AISI/ASTM
1	Motor		
2	Motor bracket	Cast iron	ASTM25B
3	Guard plate	Stainless steel	AISI 304
4	Stub shaft	Stainless steel	AISI 420/AISI 304
※ 5	Rubber parts	Rubber	EPDM
※ 6	Lining of pump head	Stainless steel	AISI 304
※ 7	Mechanical seal	Carbon/Silicon Carbide	
※ 8	Impeller	Stainless steel	AISI 304
9	Casing	Stainless steel	AISI 304
※ 10	Wear ring	PTEF	PTEF
※ 11	Impeller nut	Stainless steel	AISI 304
※ 12	Impeller key	Stainless steel	AISI 304
13	Base plate	Carbon steel	ASTMA570

※Recommended spare parts.
316 Stainless steel for the pump on request.

SELECTION CHARTS

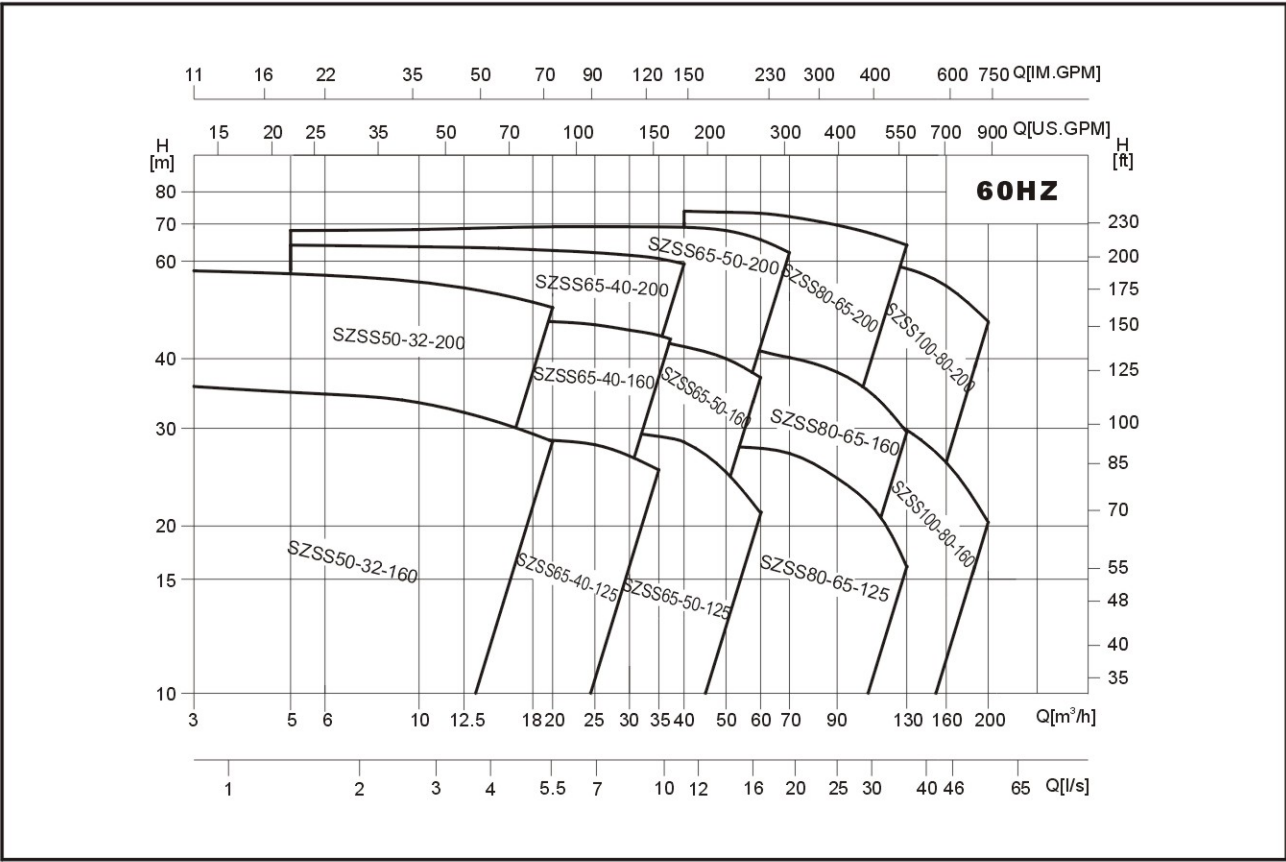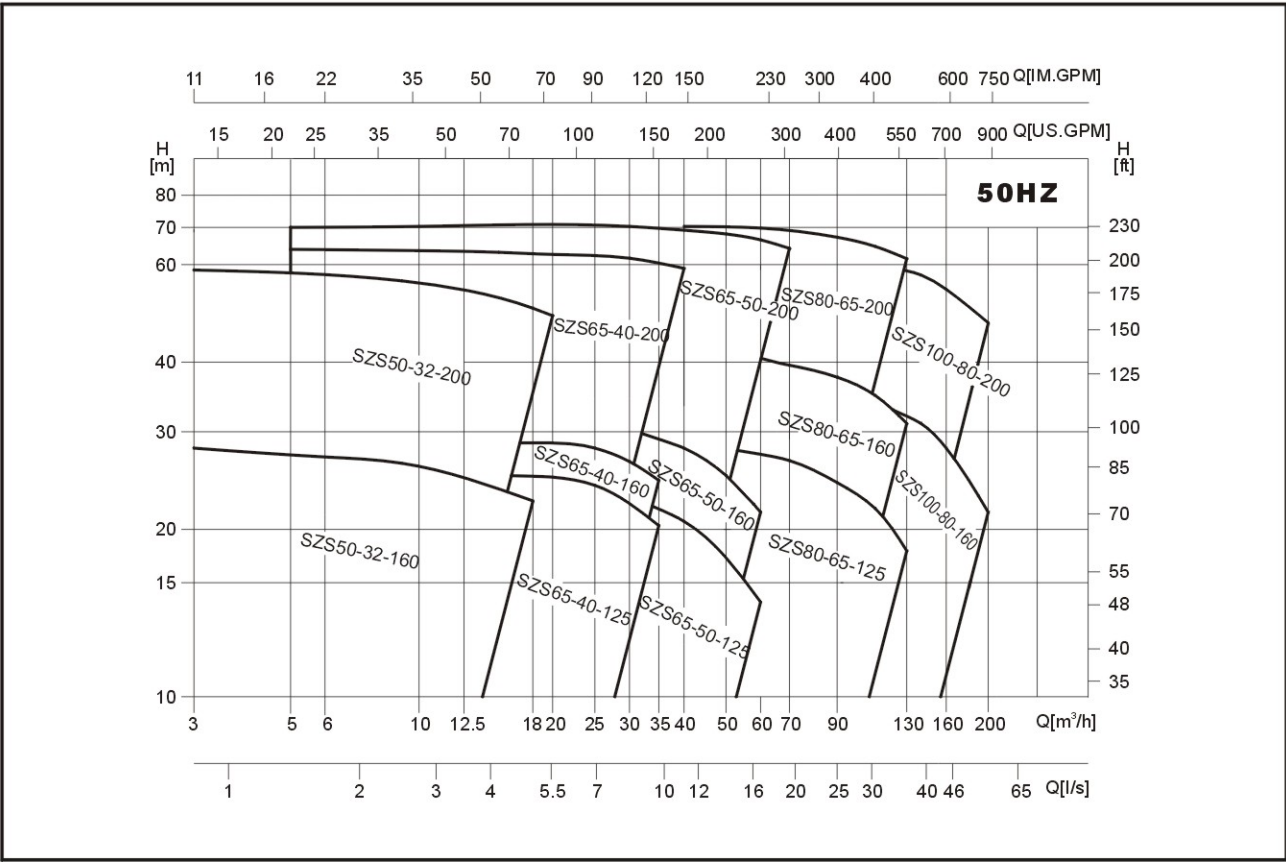

OPERATING TABLE 50HZ

Model	Power (kW)	Q (m³/h)	Head (m)	3	5	10	12.5	15	18	20	25	30	35	40	50	60	70	80	90	100	110	120	130	140	160	180	192	200
50-32-160/1.1	1.1	18.7	18.2	17	16.4																							
50-32-160/1.5	1.5	22.5	22.3	21	20	19	18																					
50-32-160/2.2	2.2	28	27.5	26	25	24	22.5																					
50-32-200/3.0	3	34.9	34.4	33	32	31	30	29																				
50-32-200/4.0	4	45.7	45	43	42	41	39	38																				
50-32-200/5.5	5.5	58.5	58	56	54	53	50	49																				
65-40-125/1.5	1.5			15.4	15.2	15	14.7	14.4	13	11.3																		
65-40-125/2.2	2.2			19.7	19.6	19.5	19.3	19	18	16.7	15.2																	
65-40-125/3.0	3			25.3	25.2	25.1	25	24.8	24	22.3	20.3																	
65-40-160/4.0	4			29.7	29.4	29.3	29	28.9	28	26.5	24.5																	
65-40-200/5.5	5.5			37.2	37	36.7	36.5	36.4	36	35.5	34.6	33.3																
65-40-200/7.5	7.5			47.5	47.2	47	46.8	46.6	46	45.2	44.5	43.3																
65-40-200/11.0	11			63.5	63.2	63	62.8	62.5	62	61.5	60.5	59																
65-50-125/3.0	3						17.3	17.2	17	16.4	15.7	15.1	10															
65-50-125/4.0	4						23.8	23.6	23	22.6	21.5	20.7	18	14.8														
65-50-160/5.5	5.5						31.1	31	31.5	30	29	28	25	21.5														
65-50-200/7.5	7.5						36.4	36.4	36	35.6	35	34.1	32	29.6														
65-50-200/9.2	9.2						43.5	43.5	43.2	43	43.5	42	40	37.5														
65-50-200/11.0	11						51.3	51	51.5	50	49.8	49.3	48	45.6														
65-50-200/15.0	15						59.7	59.6	59.5	59.5	59.3	59	58	56.2	53													
65-50-200/18.5	18.5						70.2	70.1	70.1	70	69.5	69.1	68	66.4	64													
80-65-125/5.5	5.5											19.3	18.7	18	17	15.8	14.8	13	11.4	9.7								
80-65-125/7.5	7.5											24.5	23.8	23.1	22.2	21	19.6	18	16.2	14.1								
80-65-125/9.2	9.2											28.1	27.8	27.3	26.6	25.7	24.3	23	21.8	20.1	18.3							
80-65-160/11.0	11											33.9	33	32.2	31.3	29.9	28.8	27	25.1	22.9	20.7							
80-65-160/15.0	15											41.8	41.1	40.4	39.5	38.6	37.6	36	34.8	33	31							
80-65-200/18.5	18.5											51	50.5	49.6	48.7	47.6	46.3	45	43.5	42.2	40.2							
80-65-200/22.0	22											57.7	57.2	56.8	55.9	55.1	54	53	51.6	49.7	48.2							
80-65-200/30.0	30											70.2	70.2	69.6	68.9	68.2	67.1	66	64.6	63.3	61.4							
100-80-160/11.0	11															23.8	23.3	22.7	21.7	21.1	20.3	19.7	18.8	17.6	15	11.8	9.7	
100-80-160/15.0	15															32.3	31.4	30.8	29.7	29.1	28.2	27.2	26	25.1	22	18.8	16.9	16.1
100-80-160/18.5	18.5															36.2	35.5	35.2	34.5	33.8	33	32.7	31.7	31	28	24.8	22.8	21.5
100-80-200/22.0	22															43.5	42.7	42	40.9	39.7	39	38.3	36.9	35.9	33	29	26.3	24.9
100-80-200/30.0	30															55.4	54.6	54.1	53	52.6	51.5	50.5	49.2	48.2	45	41.9	39.2	37.6
100-80-200/37.0	37															64.1	63	62.5	61.7	61	59.6	59	58	57.4	54	51.2	48.9	47.1


OPERATING TABLE

60HZ

Model	Power (kW)	Q (m³/h)	3	5	6.3	9	10	12.5	15	18	20	25	30	35	40	50	60	70	80	90	100	110	120	130	140	160	180	200
50-32-160/1.1	1.1	Head (m)	19	18.3	18	17.3	17	16.4																				
50-32-160/1.5	1.5		23.4	22.6	22.2	21.2	20.8	20	18.8	16.8																		
50-32-160/2.2	2.2		28.6	27.7	27.4	26.4	25.8	25	24	22.8																		
50-32-200/3.0	3		35.6	34.8	34.5	33.7	33	32	30.8	29.3	28.4																	
50-32-200/4.0	4		45	44.2	44.1	43.3	42.9	42	41.2	40	39.1																	
50-32-200/5.5	5.5		57.5	56.8	56.5	55.7	55.2	54	52.5	50.5	49.4																	
65-40-125/1.5	1.5			16.1	15.9	15.7	15.6	15.3	15.1	14.5	14.2	13	11.2															
65-40-125/2.2	2.2			20.3	20.2	20.1	20	19.8	19.7	19.3	19.1	18	16.2	14.3														
65-40-125/3.0	3			26	25.8	25.7	25.6	25.3	25.2	24.7	24.6	24	22.5	20.7														
65-40-125/4.0	4			29.6	29.4	29.4	29.4	29.2	29.1	28.6	28.5	28	26.7	25.2														
65-40-160/5.5	5.5			37.8	37.5	37.4	37.3	37	36.8	36.4	36.3	36	35.5	34.5	33.2													
65-40-160/7.5	7.5			48	47.9	47.9	47.8	47.4	47.2	46.5	46.6	46	45	44	42.5													
65-40-200/11.0	11			64	63.8	63.7	63.6	63	63.2	62.7	62.6	62	61.3	60.5	59.2													
65-50-125/3.0	3			20.1	20	20	20	19.8	19.6	19.5	19.3	18.5	17.9	16.8	15.8	13	9.3											
65-50-125/4.0	4			25.3	25.2	25.2	25.2	25	24.8	24.5	24.5	23.8	23.2	22	20.8	18	14.1											
65-50-125/5.5	5.5			32	31.7	31.7	31.7	31.5	31.3	31.3	31.2	30.7	30.2	29.2	28.3	25	21.1											
65-50-160/7.5	7.5			35	34.8	35	35.3	35.3	35.5	35.5	35.8	35.7	35.5	34.8	34.2	32	29.3											
65-50-160/9.2	9.2			43	42.8	43	43.2	43.3	43.6	43.9	44	43.8	43.5	42.6	42	40	37											
65-50-200/11.0	11			51.2	51	51.3	51.6	51.7	51.7	51.7	51.8	51.4	51.2	50.3	50	48	45											
65-50-200/15.0	15			61	61.2	61.2	61.5	61.5	61.5	61.5	61.5	61.4	61.3	60.4	60	58	55.5	52										
65-50-200/18.5	18.5			68	68	68.2	68.3	68.2	68.6	68.6	69	69	69.2	68.6	68.9	68	65.4	62										
80-65-125/5.5	5.5														20.6	20	18.8	17.4	16.1	14.4	12.5	11	8.8					
80-65-125/7.5	7.5														24.5	23.7	22.9	22	20.9	19.5	18	15.8	14.4					
80-65-125/9.2	9.2														29	28.4	27.7	27	25.8	24.4	23	21.3	19.3	16.9				
80-65-160/11.0	11														34.3	33.5	32.5	31.6	30.6	29	27	24.7	22.9	20.5				
80-65-160/15.0	15														42.7	41.8	41	40.2	38.8	37.8	36	34.1	32.2	29.5				
80-65-200/18.5	18.5														52.2	51.6	50.8	49.2	47.7	46.3	45	43	40.9	38.9				
80-65-200/22.0	22														60.1	59.2	58.3	57	55.8	54.4	53	51.4	49.7	47.5				
80-65-200/30.0	30														73.7	73.3	73	72.1	70.7	69.5	68	66.8	65.5	64				
100-80-160/15.0	15															31.5	30.8	30	28.9	28.4	26.6	25.3	24.2	23.4	20	16.5	13.7	
100-80-160/18.5	18.5															35.9	35.2	34.8	33.8	33.1	31.8	31	29.6	28.6	26	23.5	20.3	
100-80-200/22.0	22															44.1	43	42.5	41.1	40.3	39.1	38.5	37.2	35.8	33	29.6	25.8	
100-80-200/30.0	30															56.5	55.5	55.2	54.1	52.7	52	50.6	49.3	48.7	45	42	39.1	
100-80-200/37.0	37															65.5	64.5	63.9	62.6	61.6	60	59	57.6	57	54	50.5	46.6	




50-32-160 50HZ

ISO2548 AnnexB

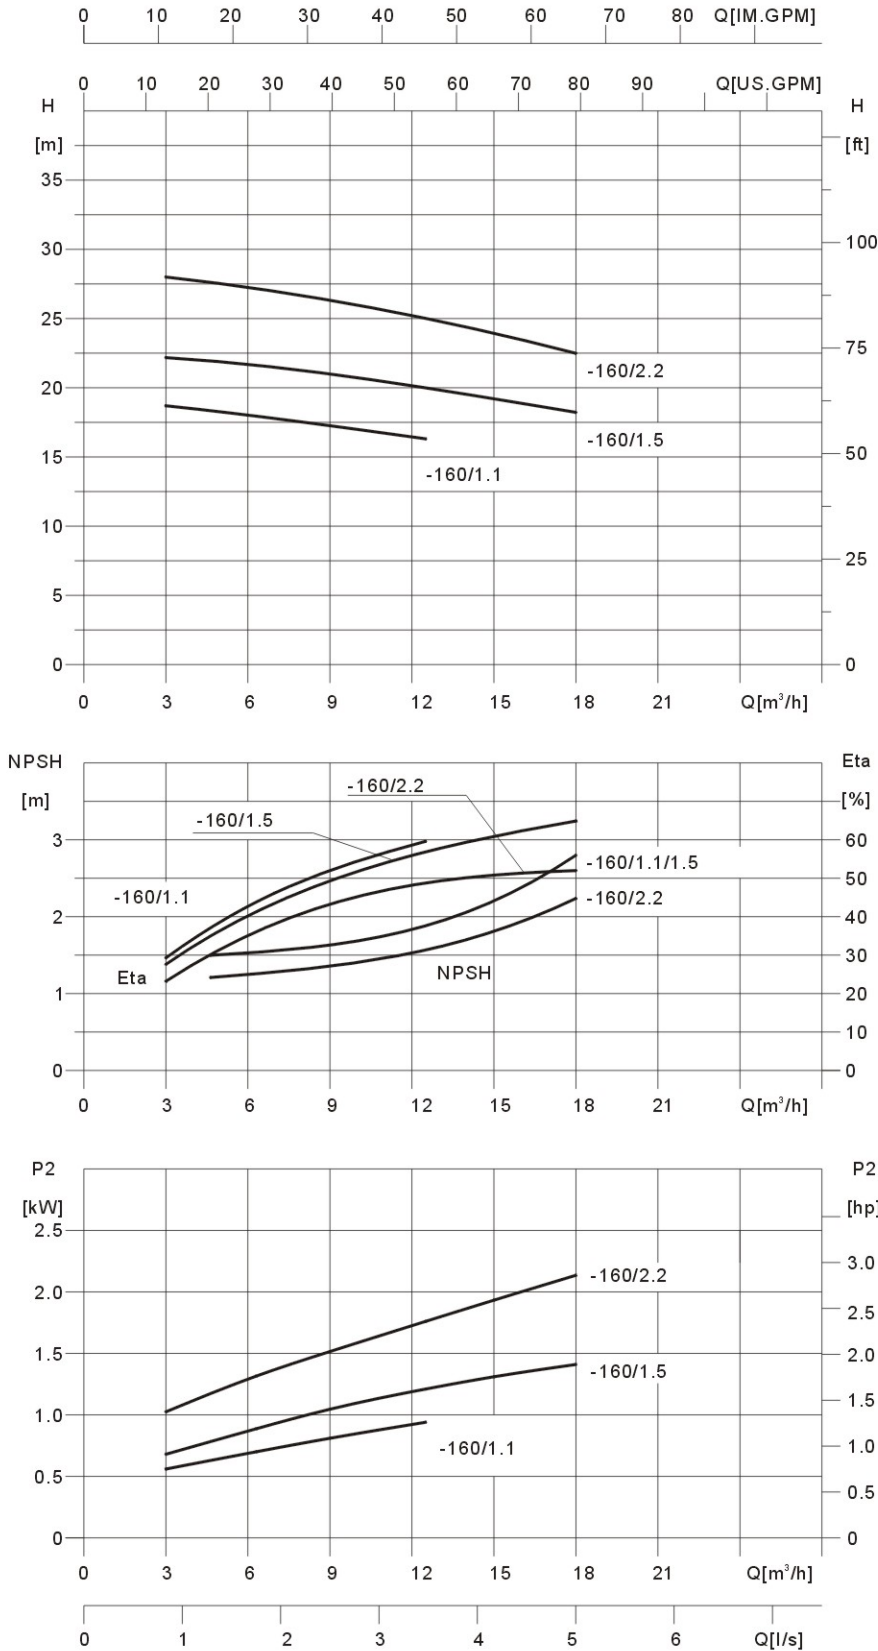




50-32-200 50HZ

ISO2548 AnnexB

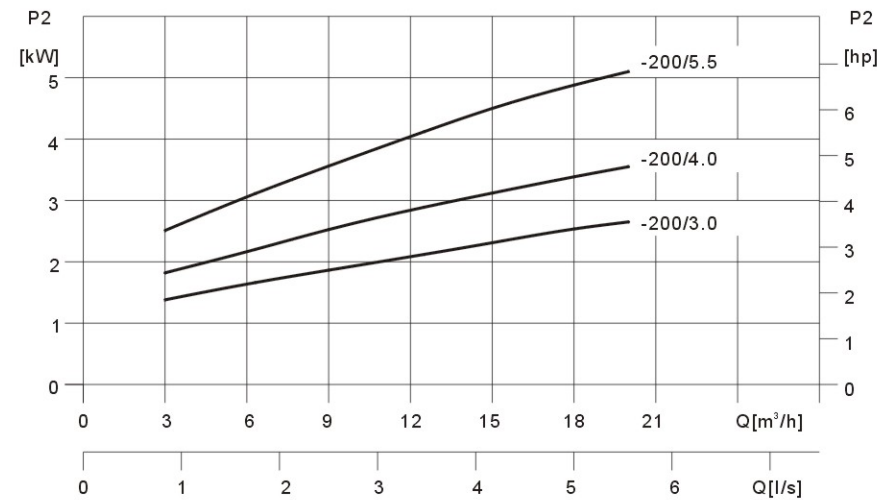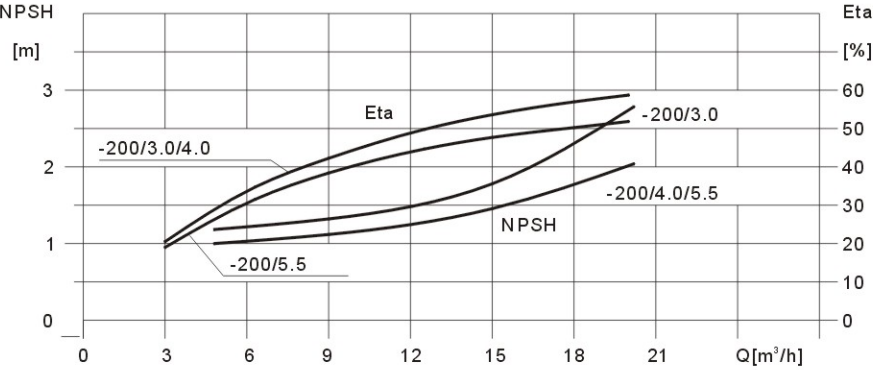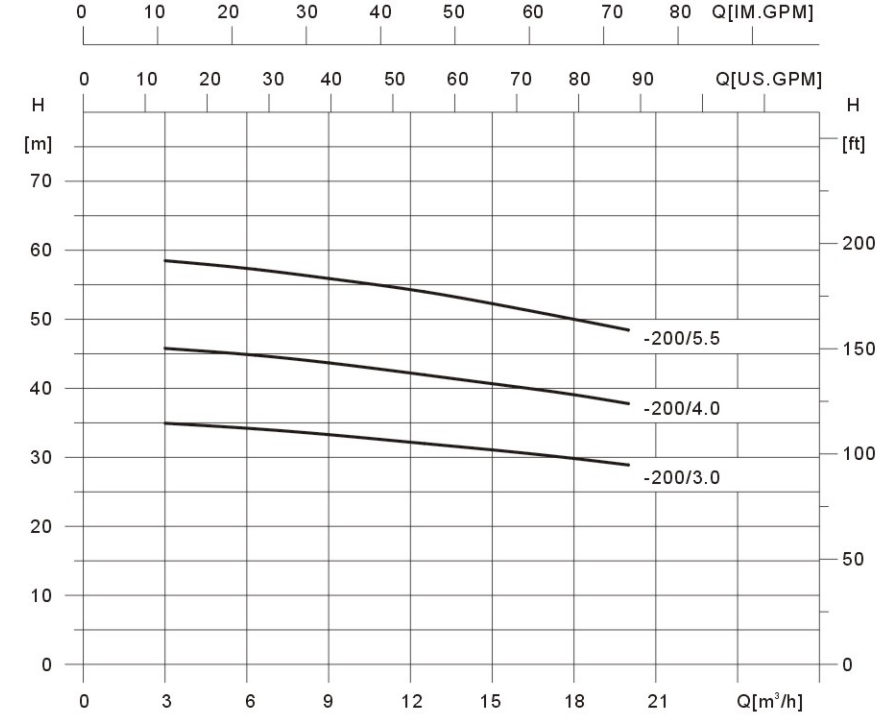


65-40-125 50HZ

ISO2548 AnnexB

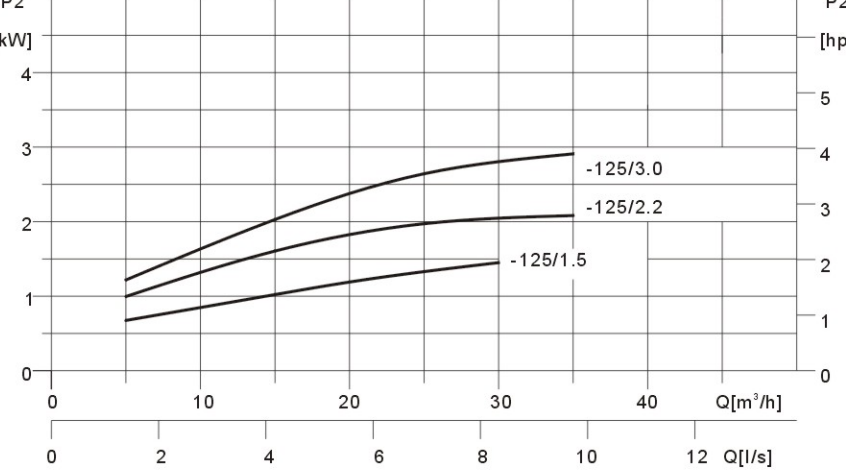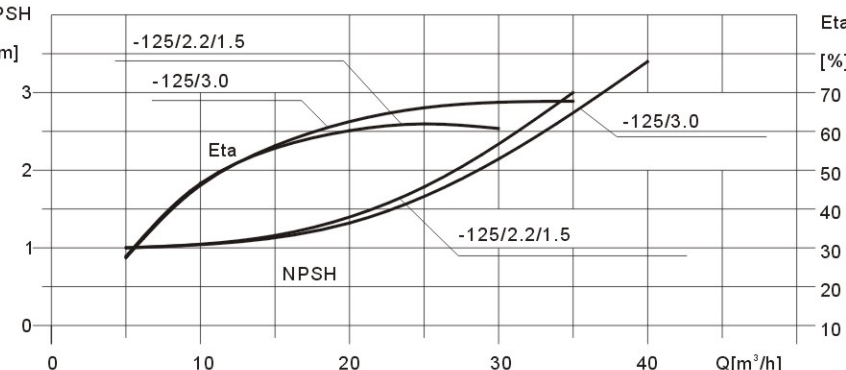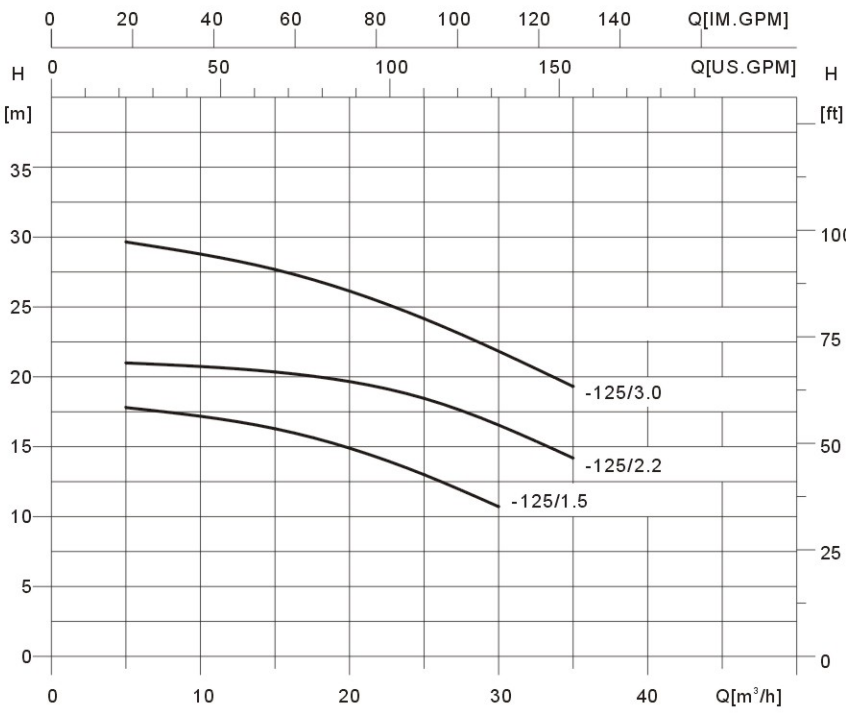


65-40-160 50HZ



ISO2548 AnnexB


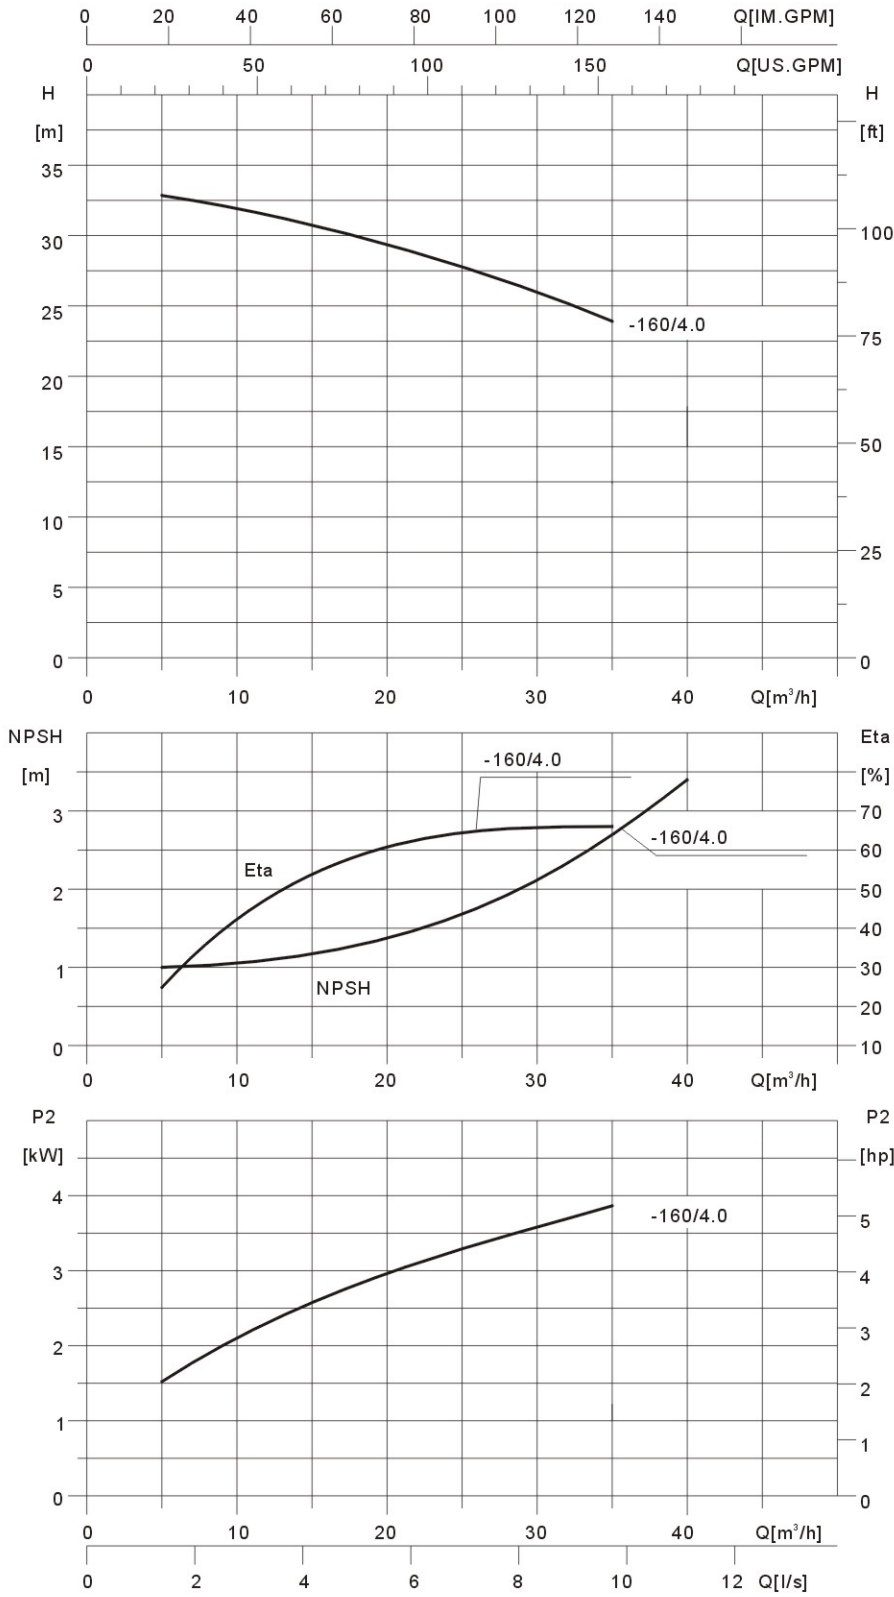




65-40-200 50HZ

ISO2548 AnnexB

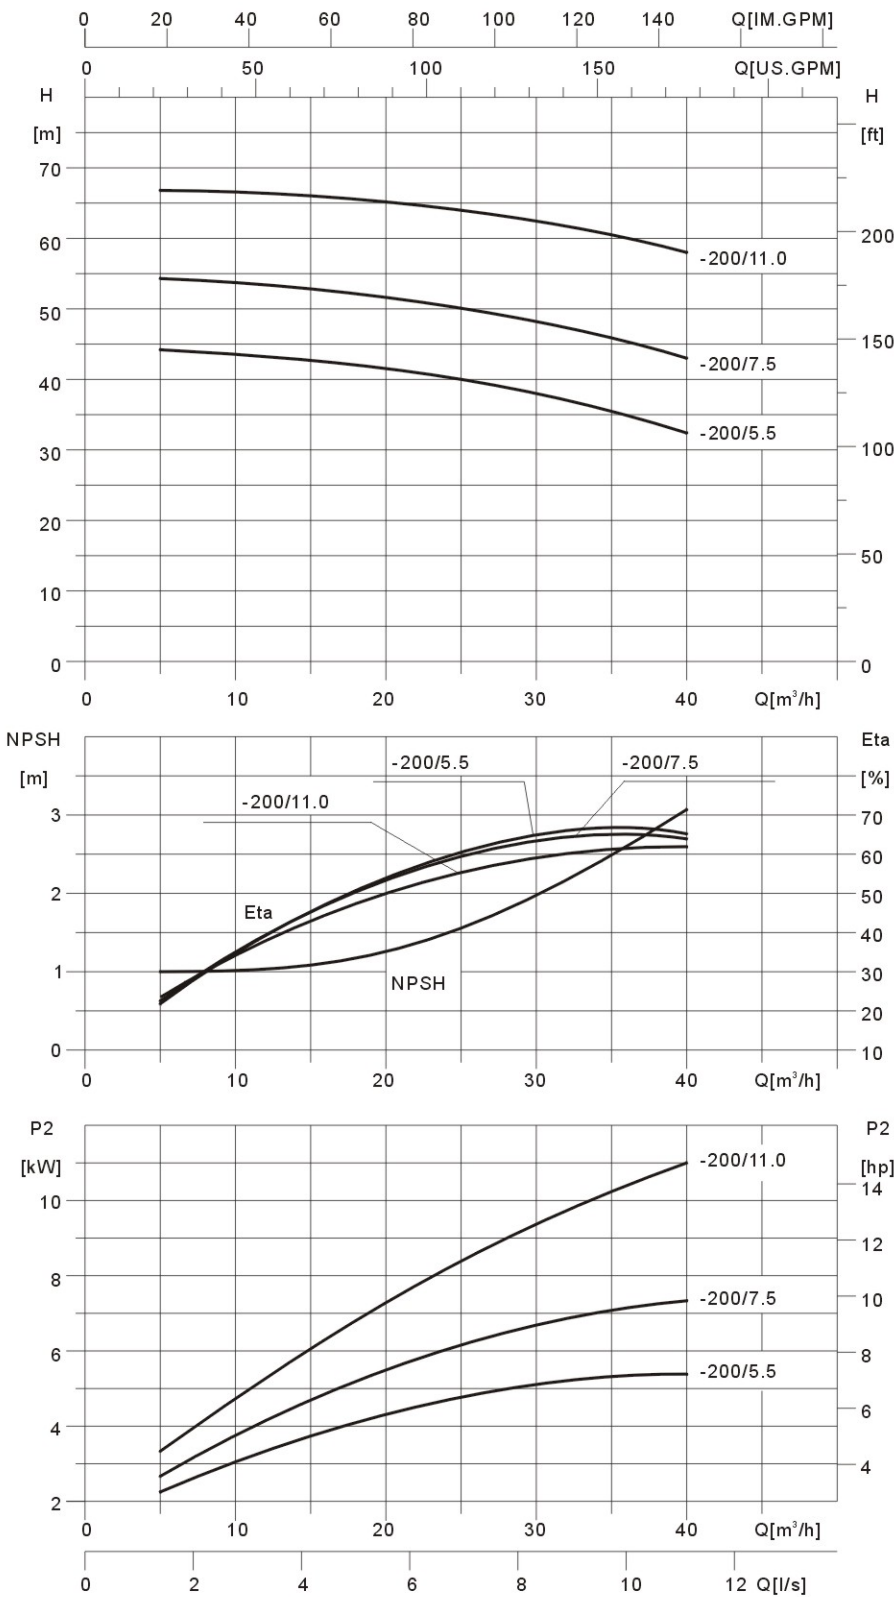

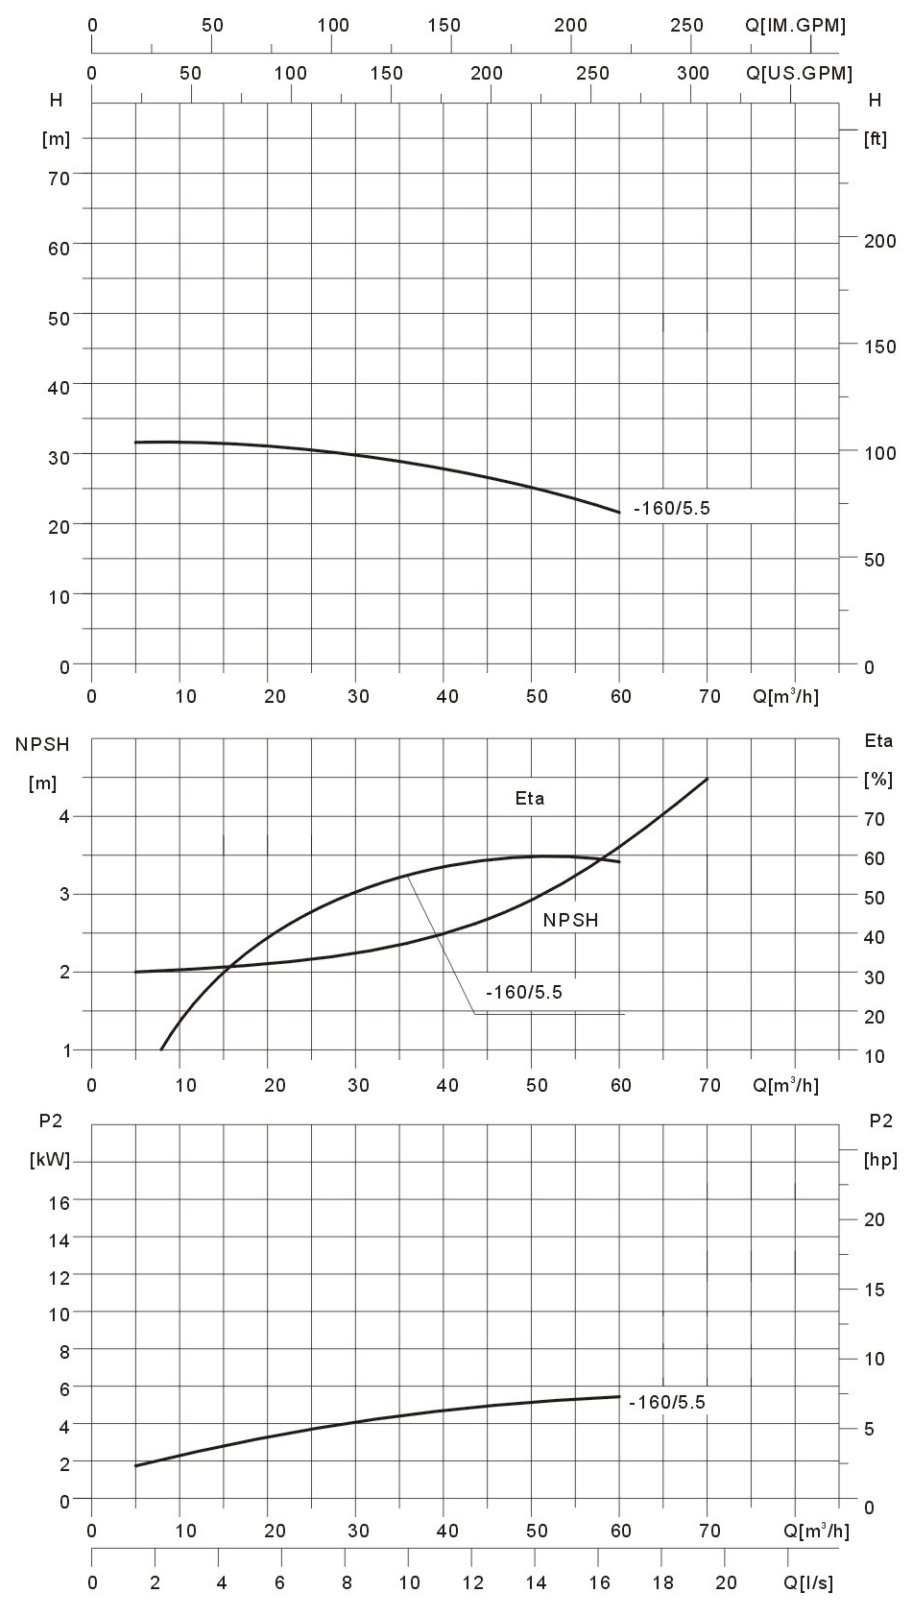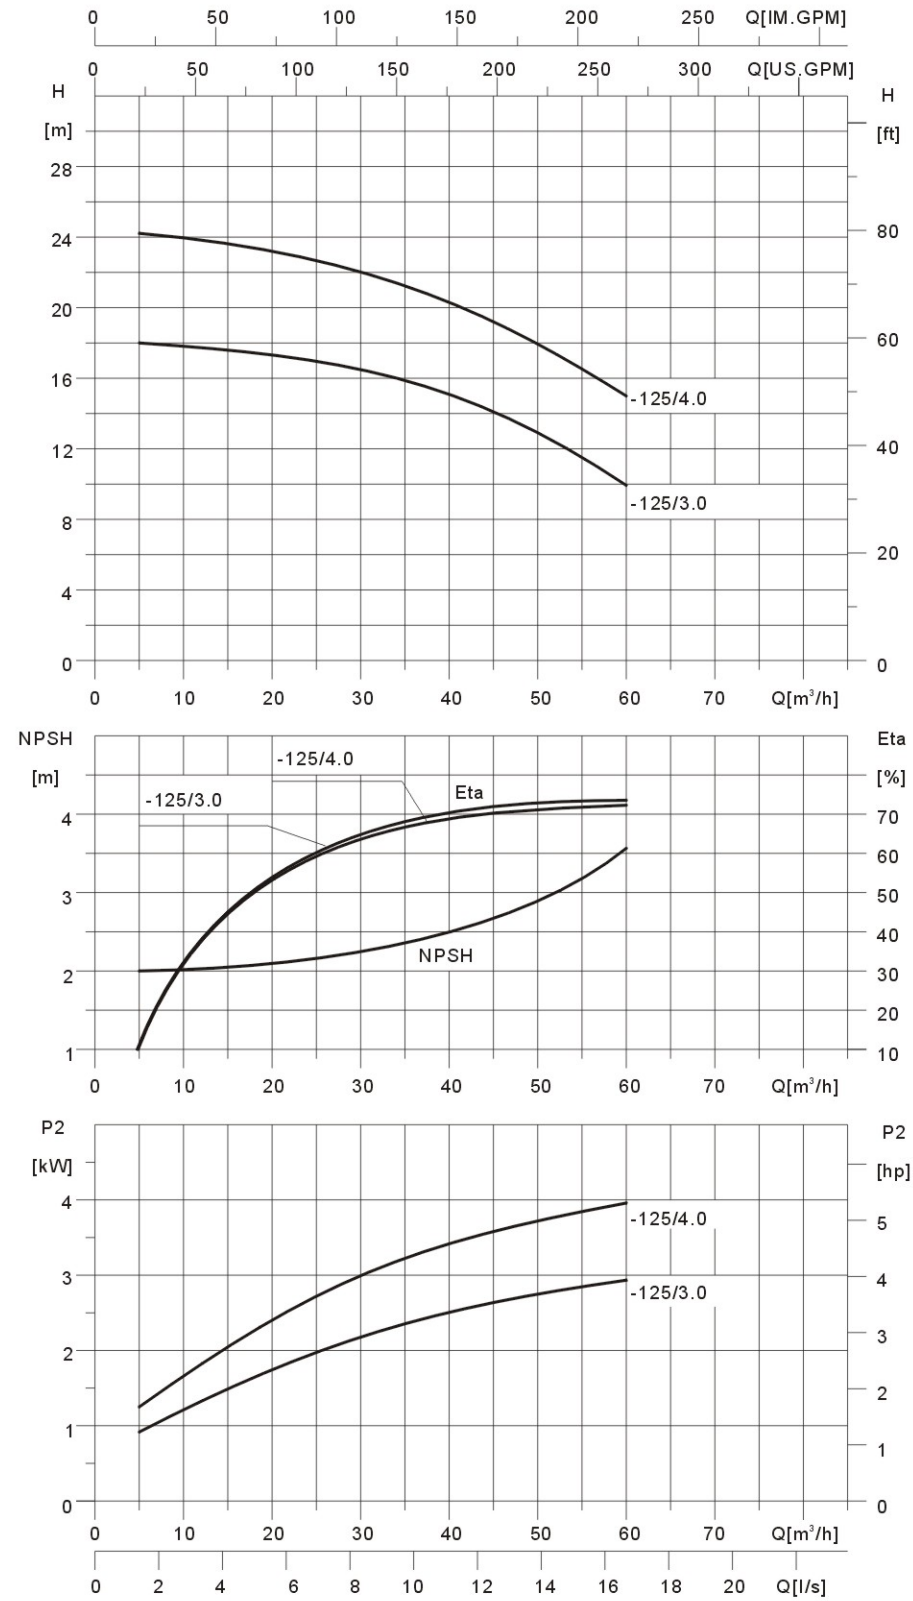


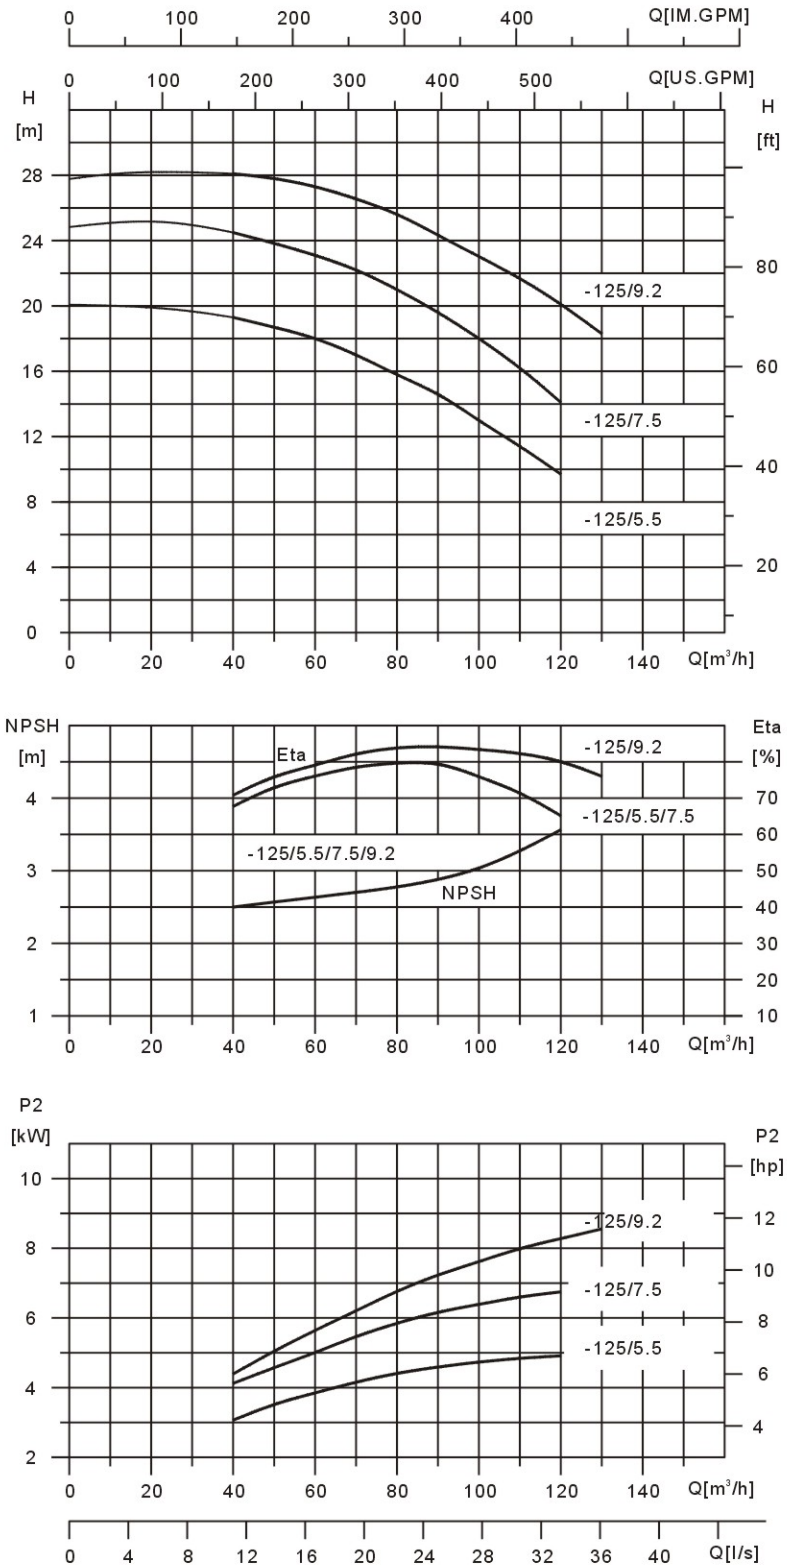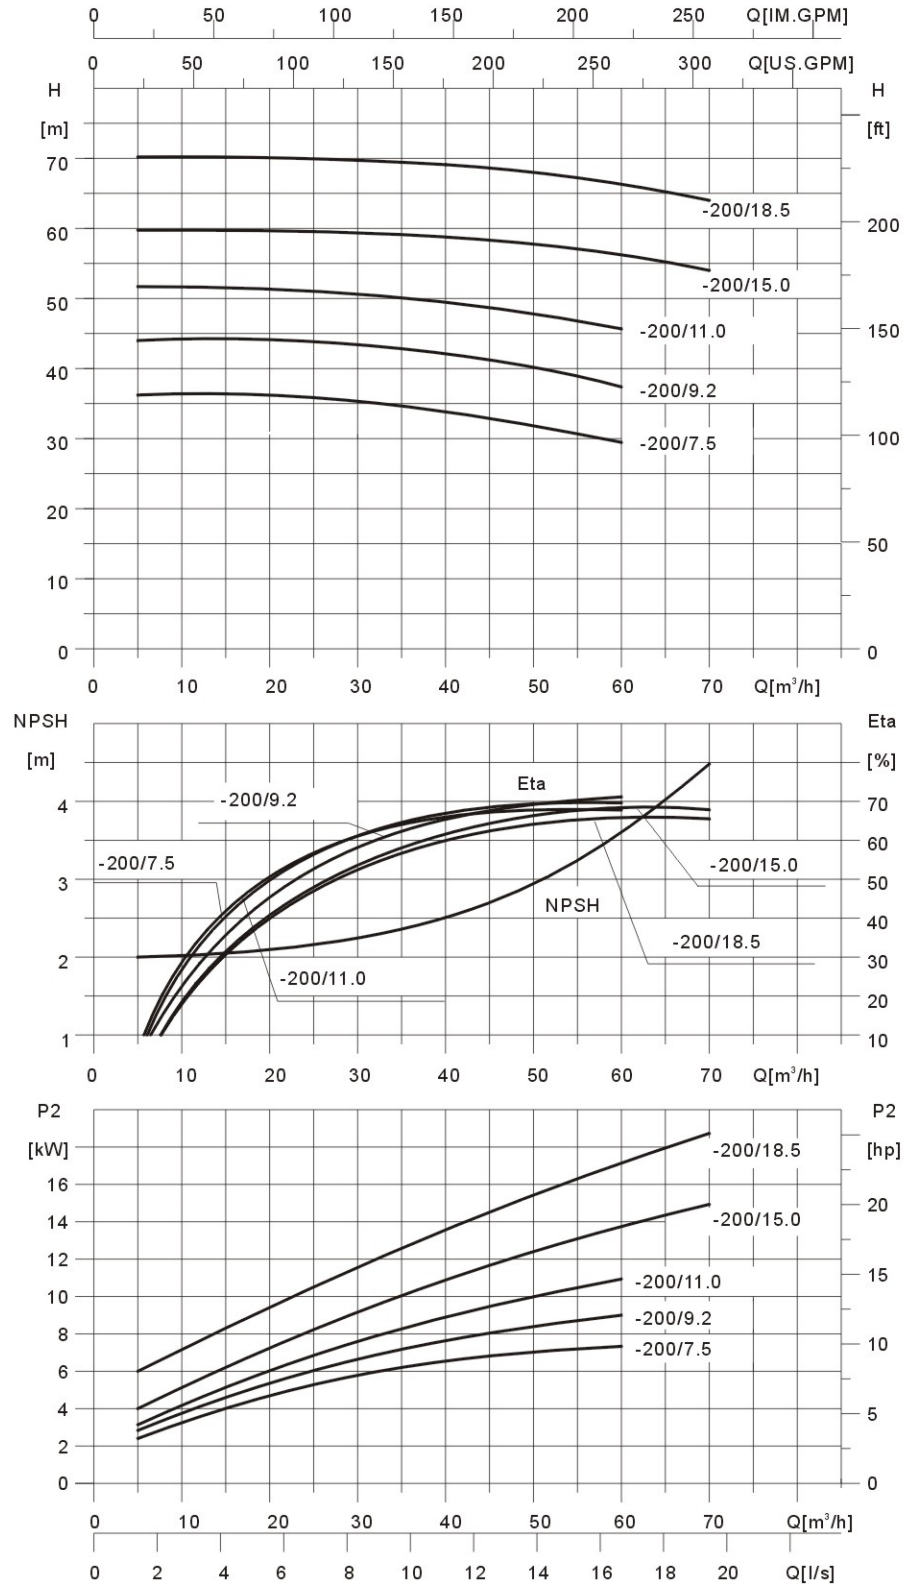

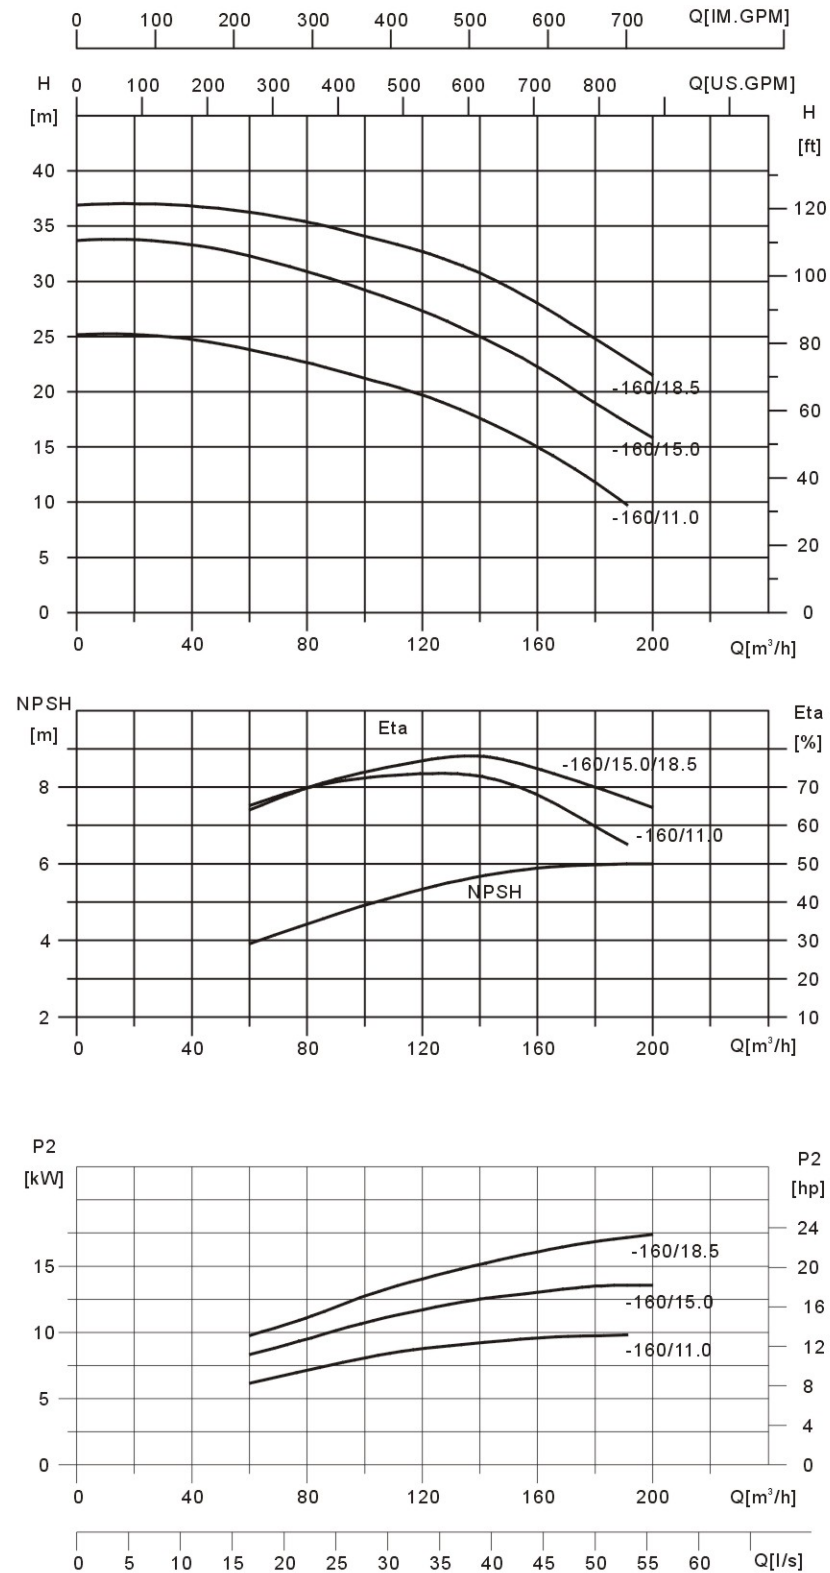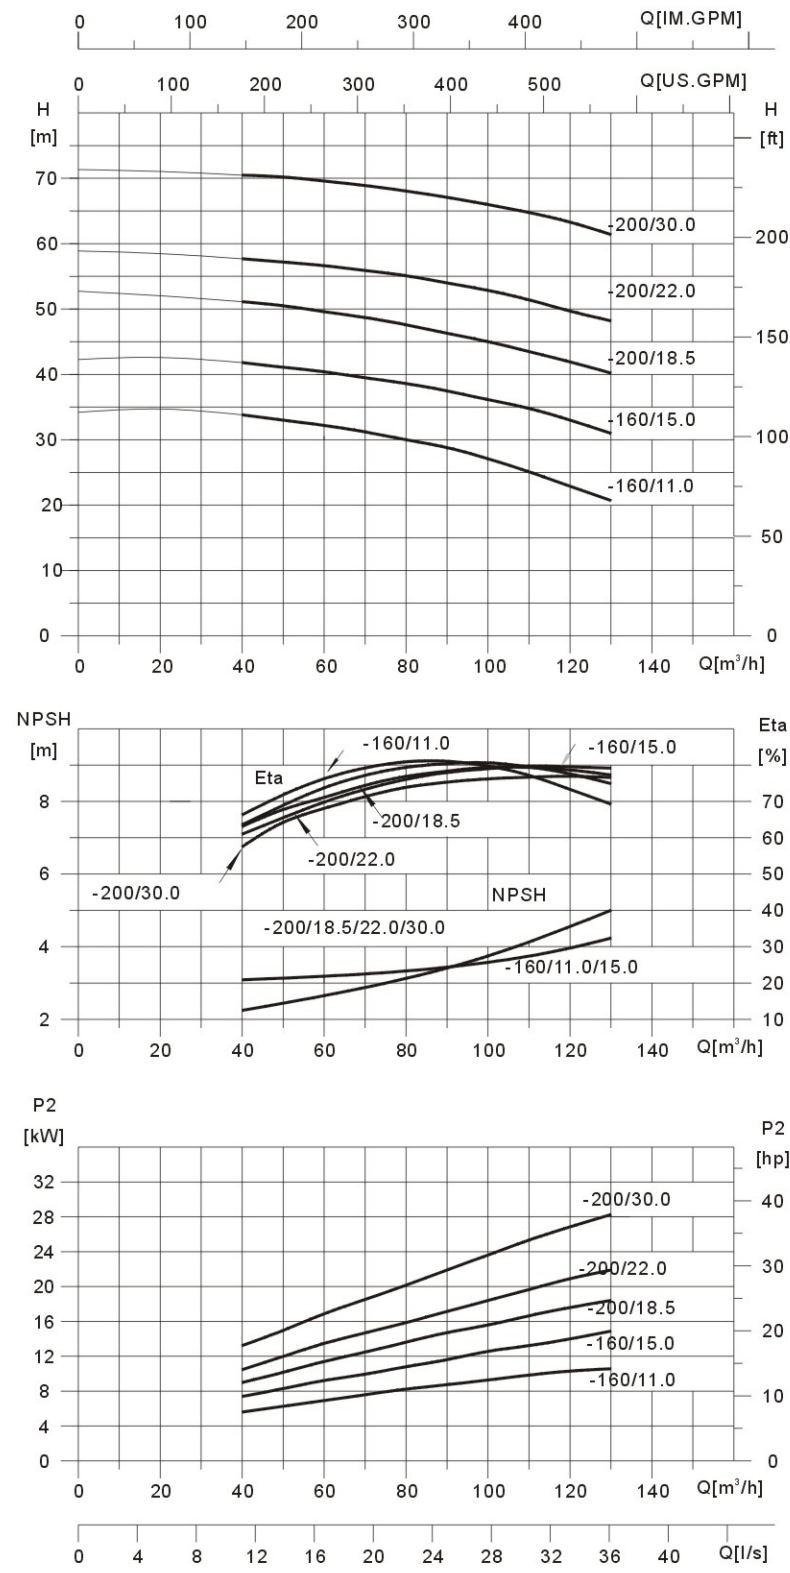


100-80-200 50HZ







ISO2548 AnnexB






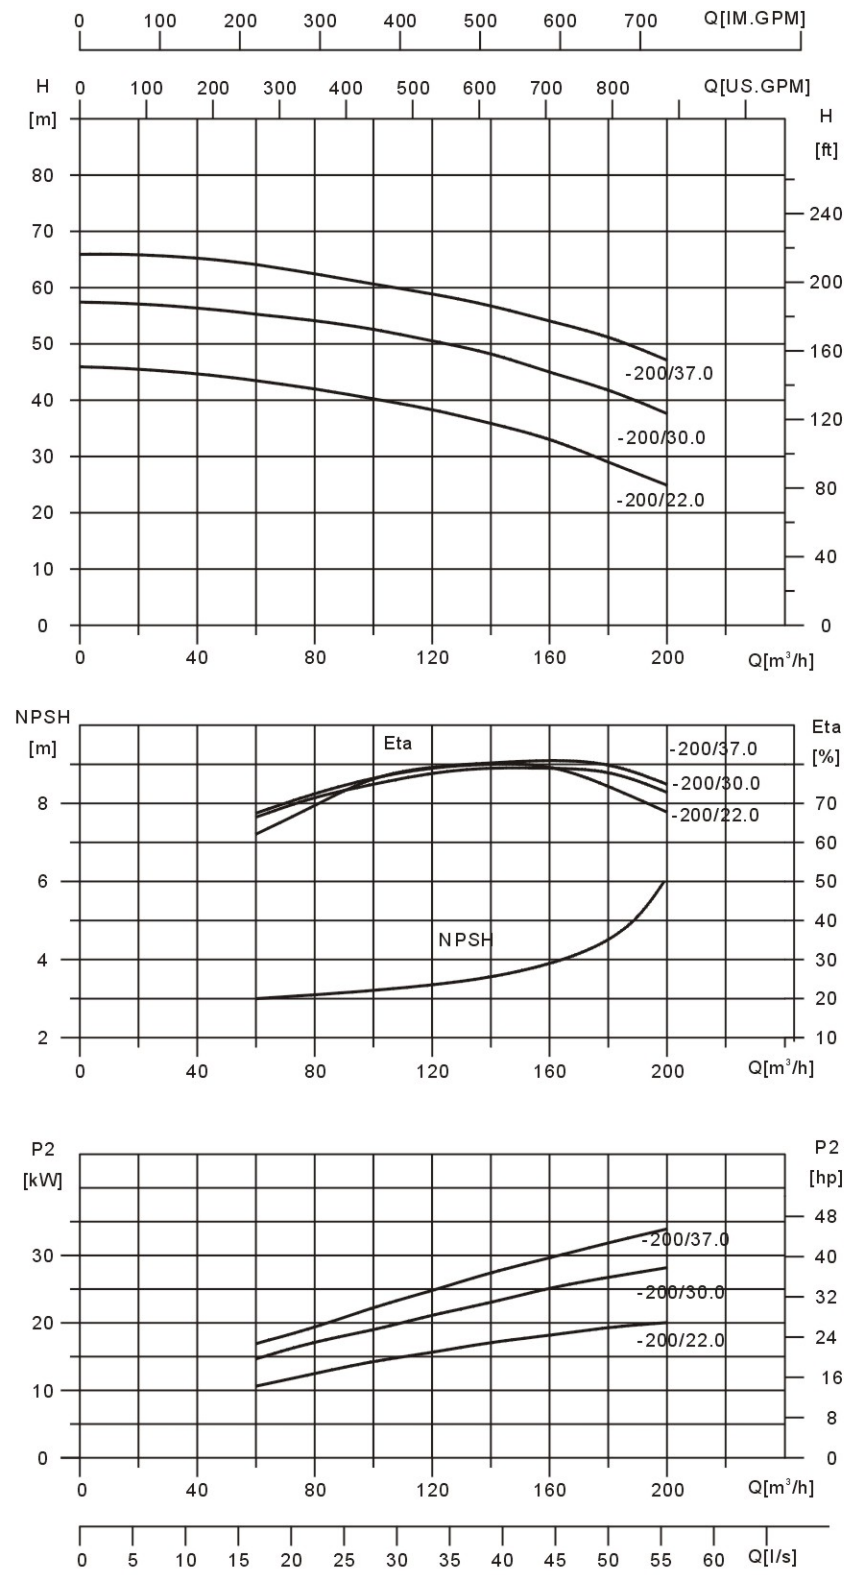




50-32-160 60HZ



ISO2548 AnnexB




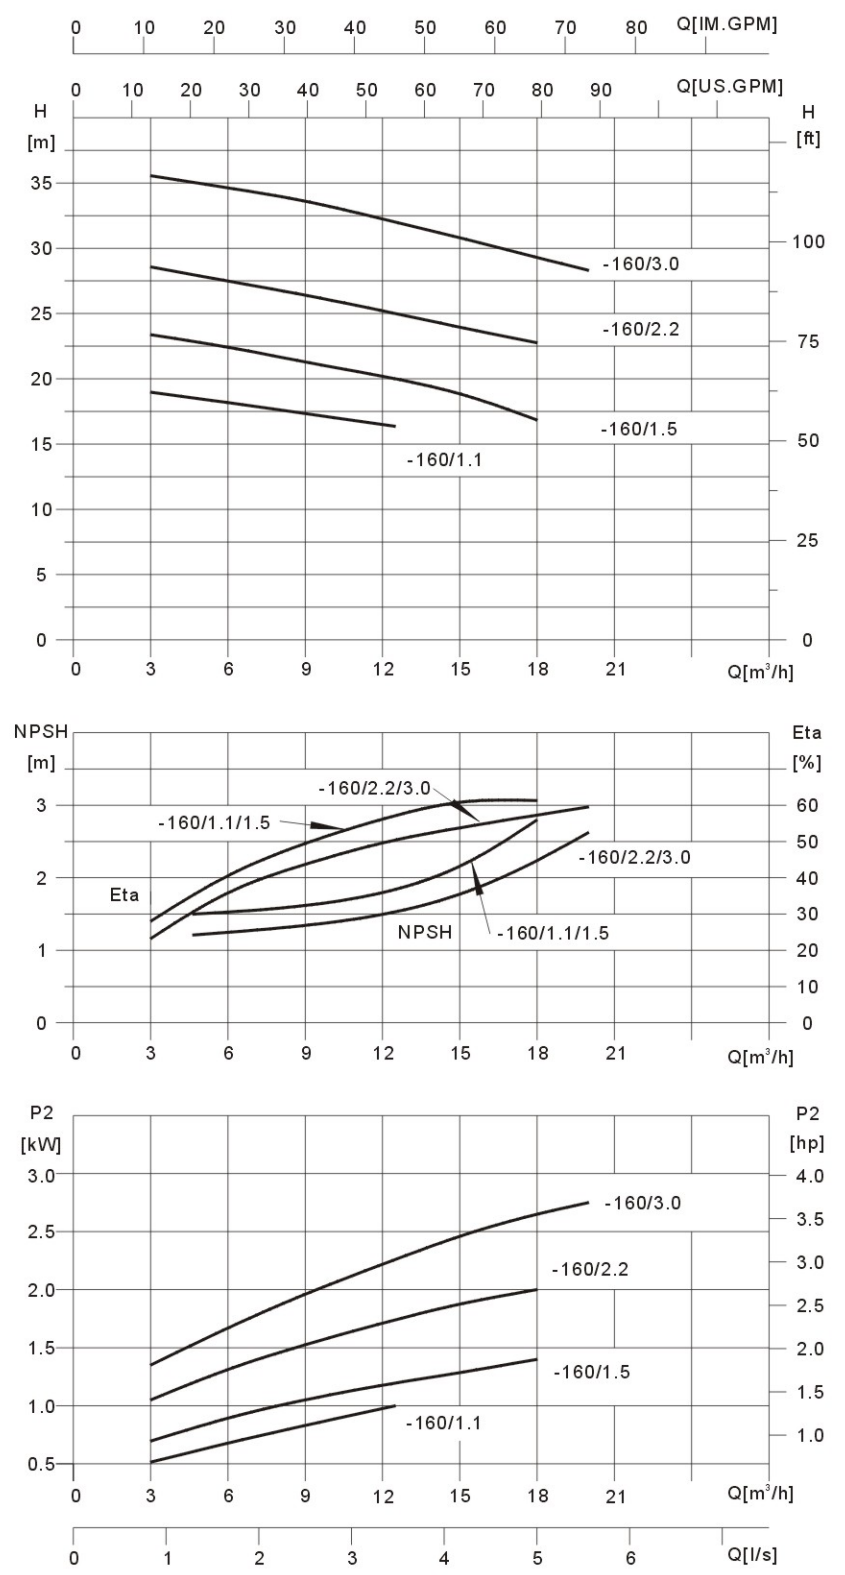


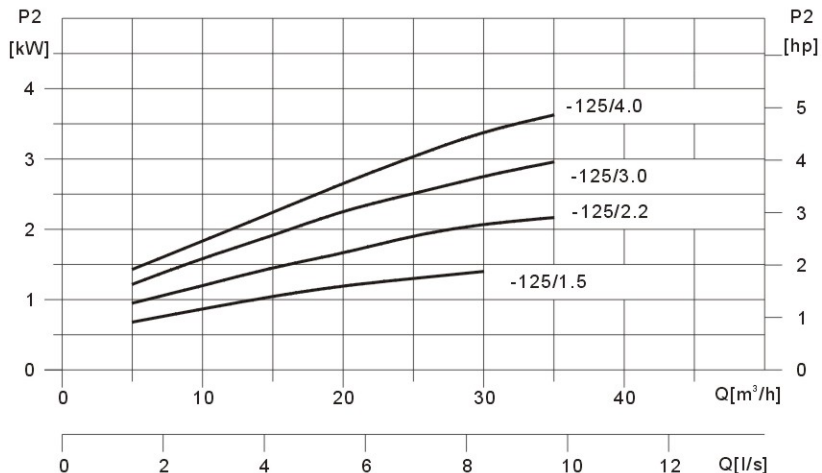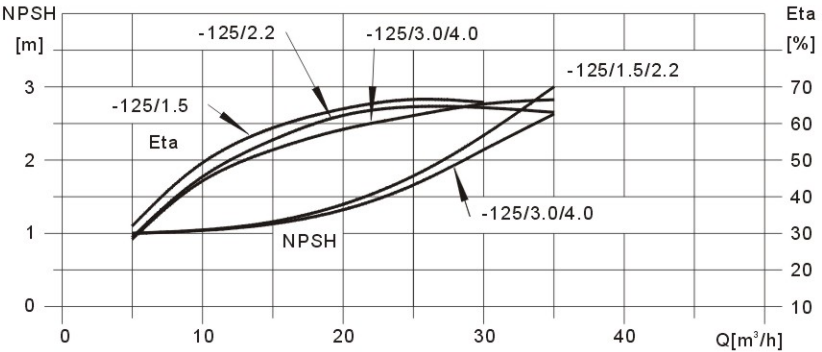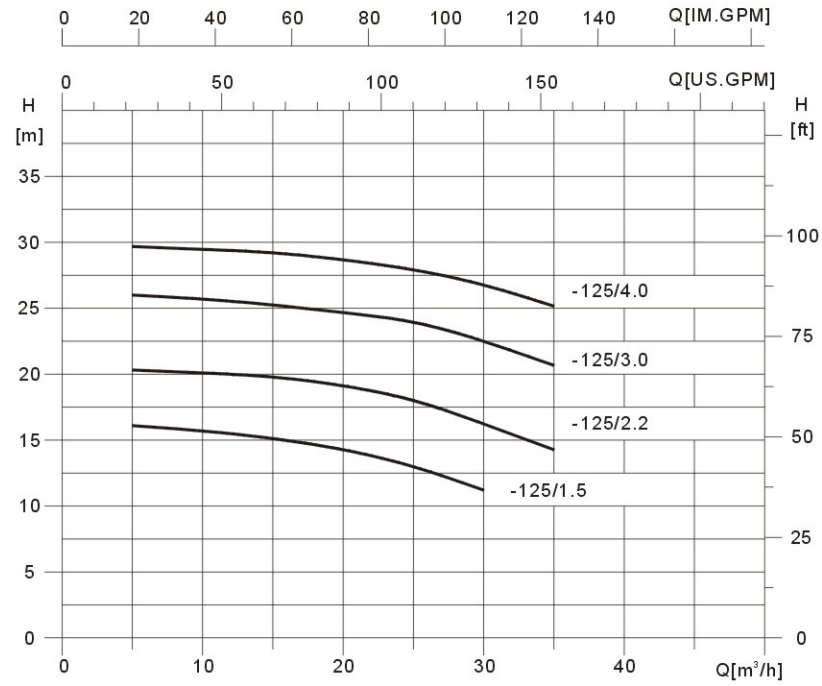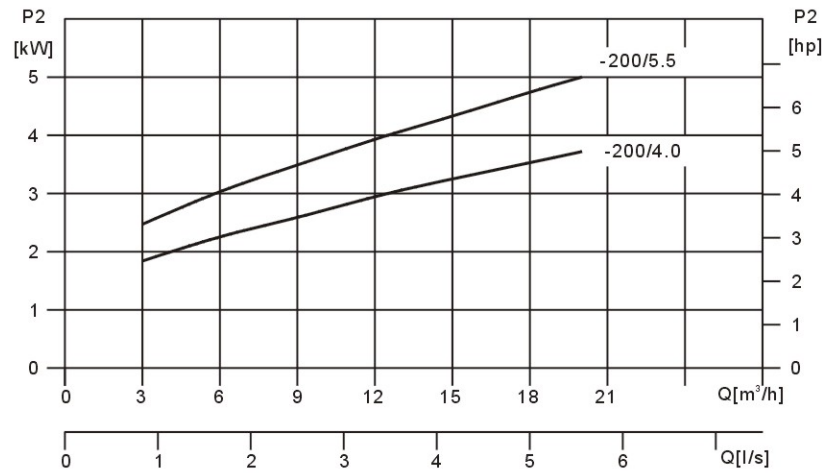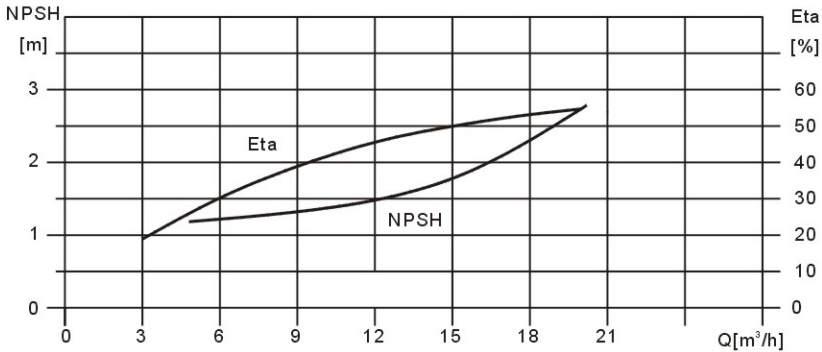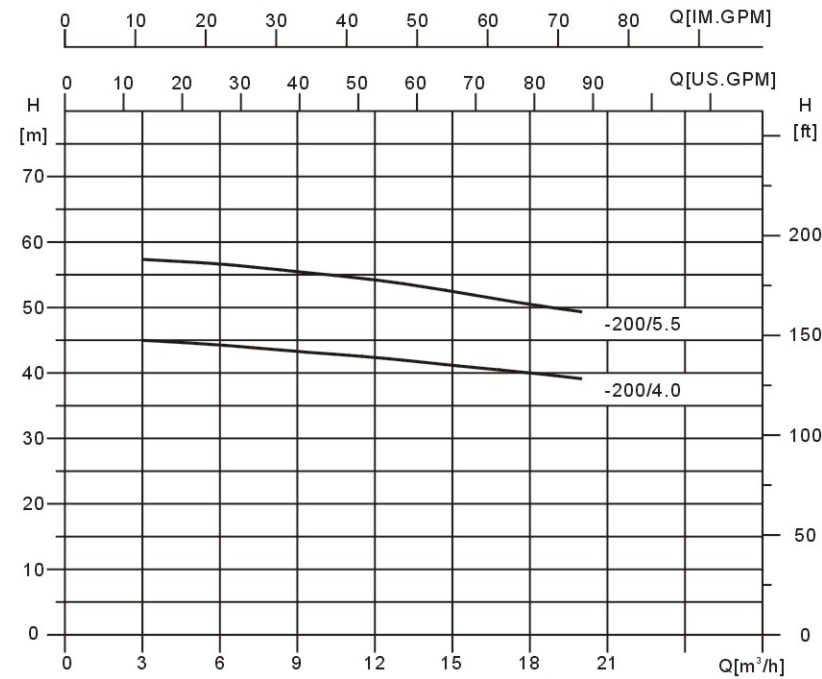

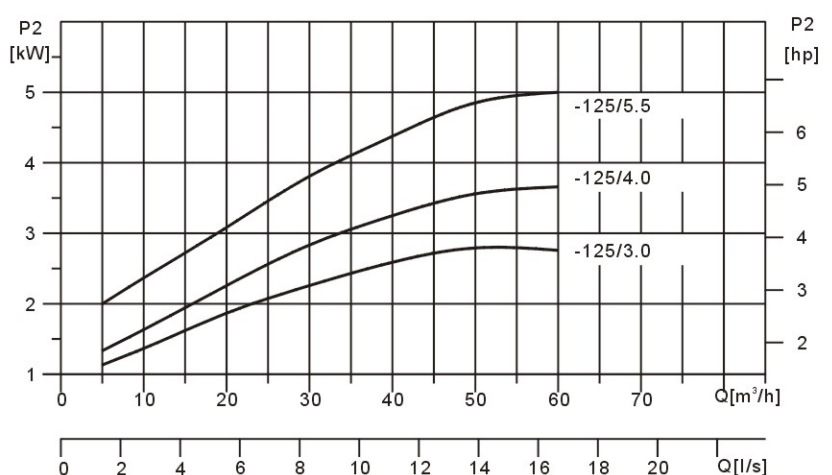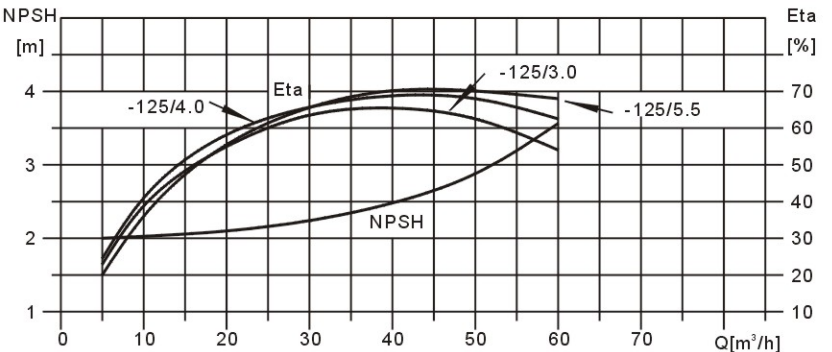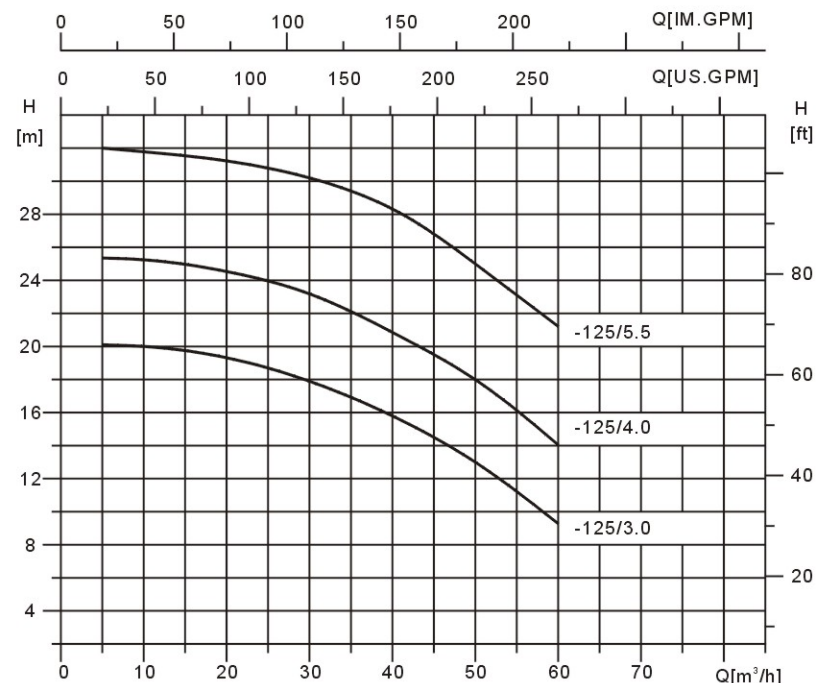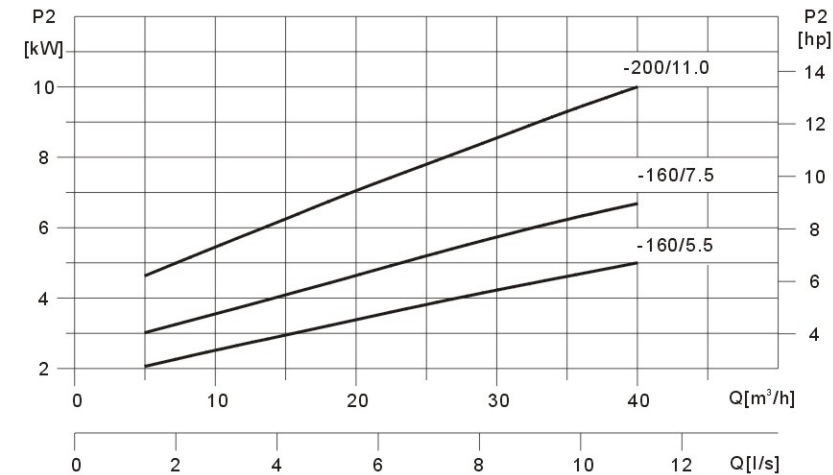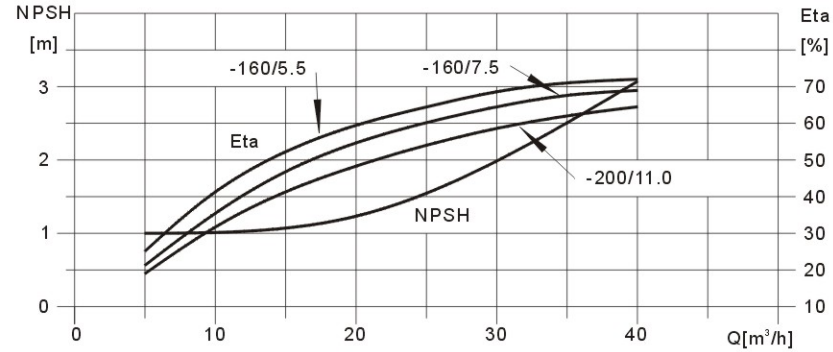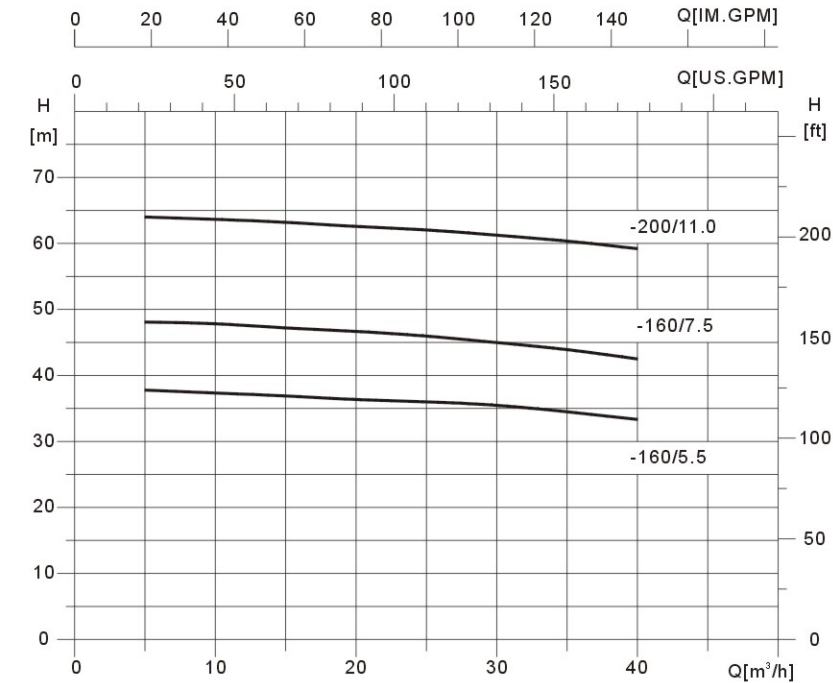

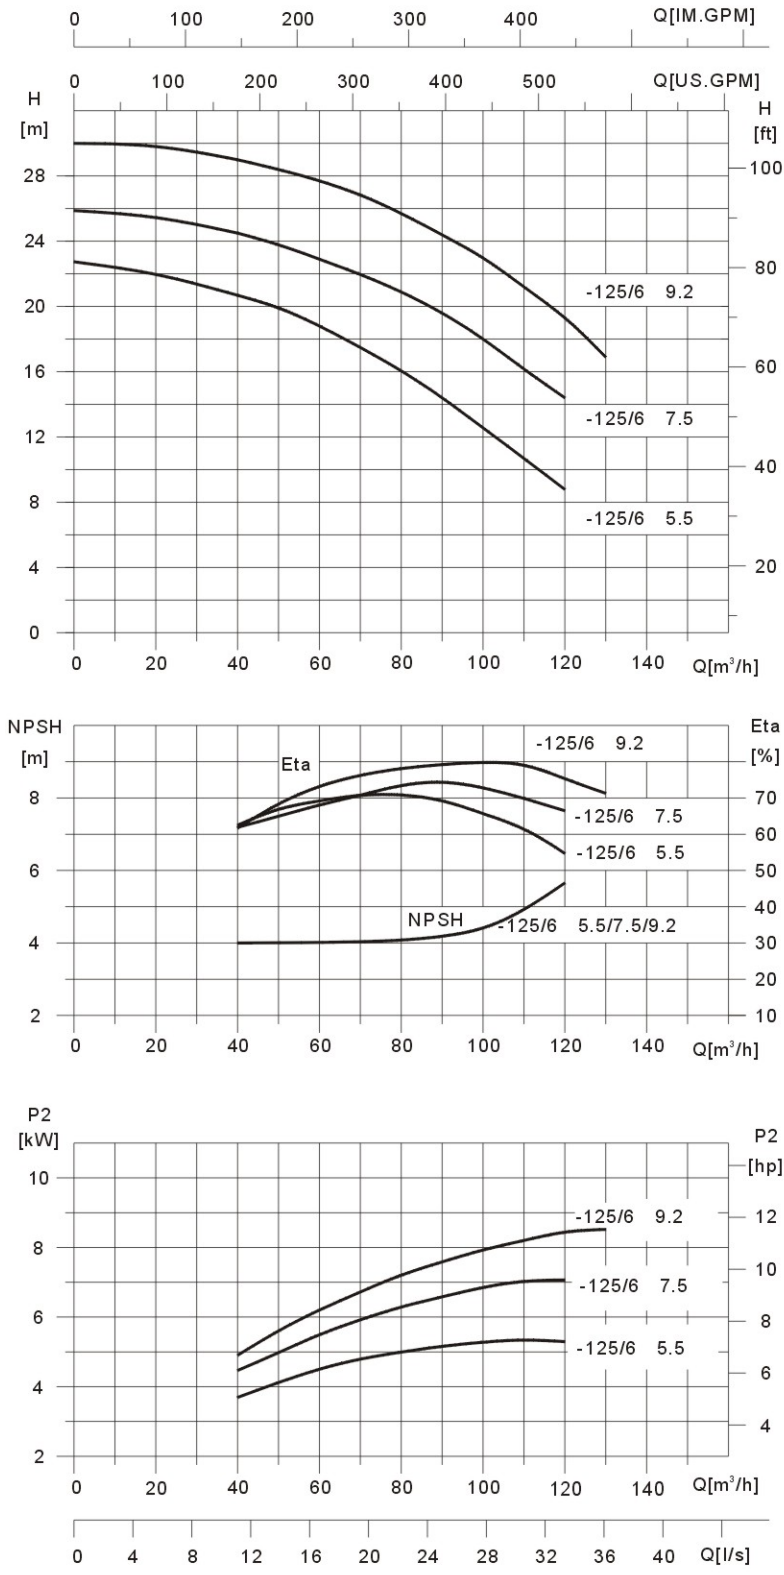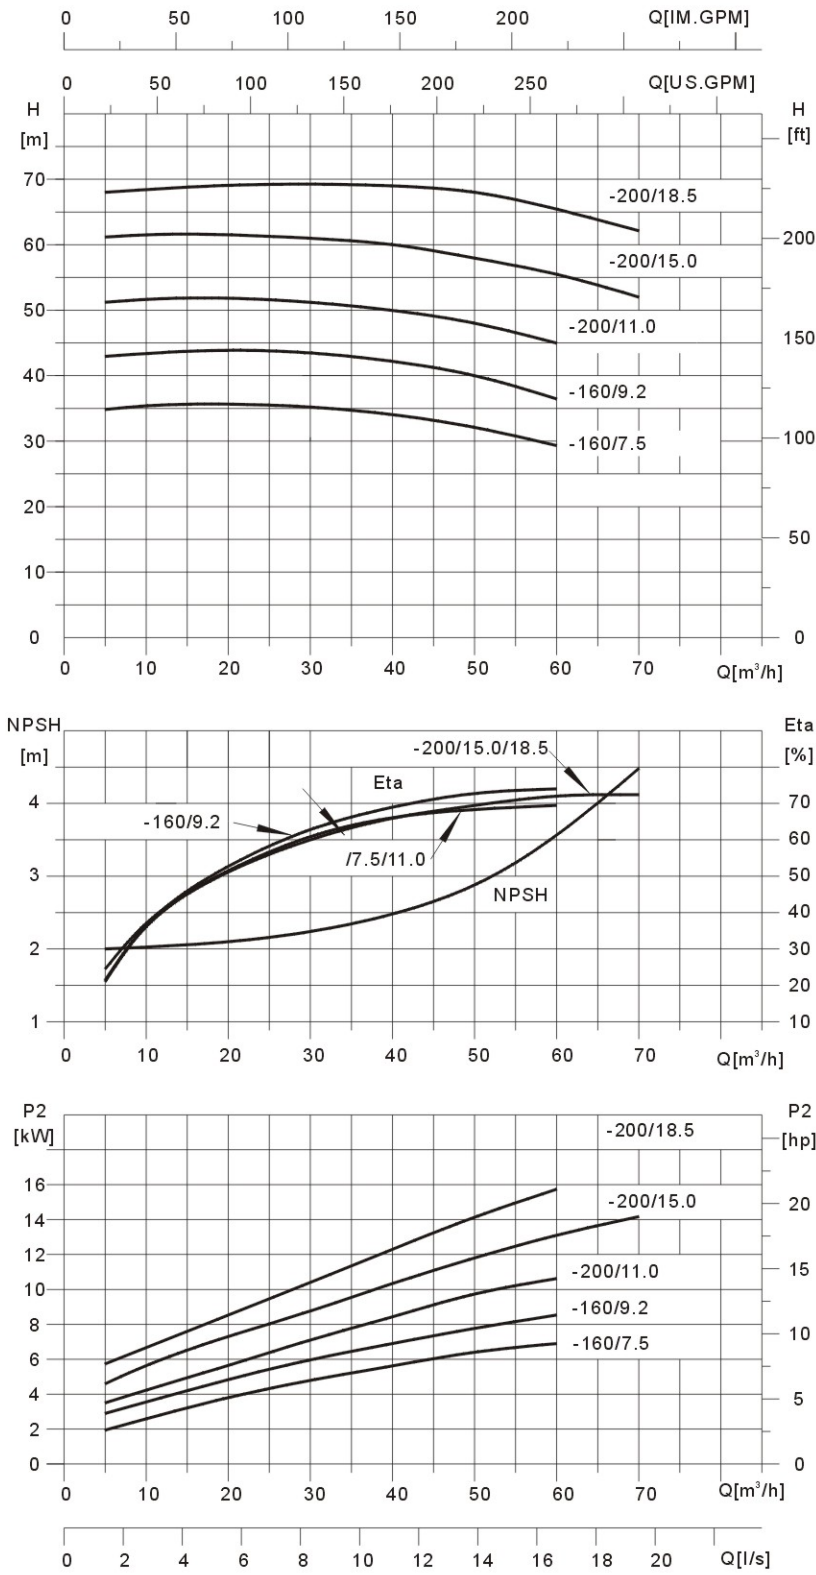

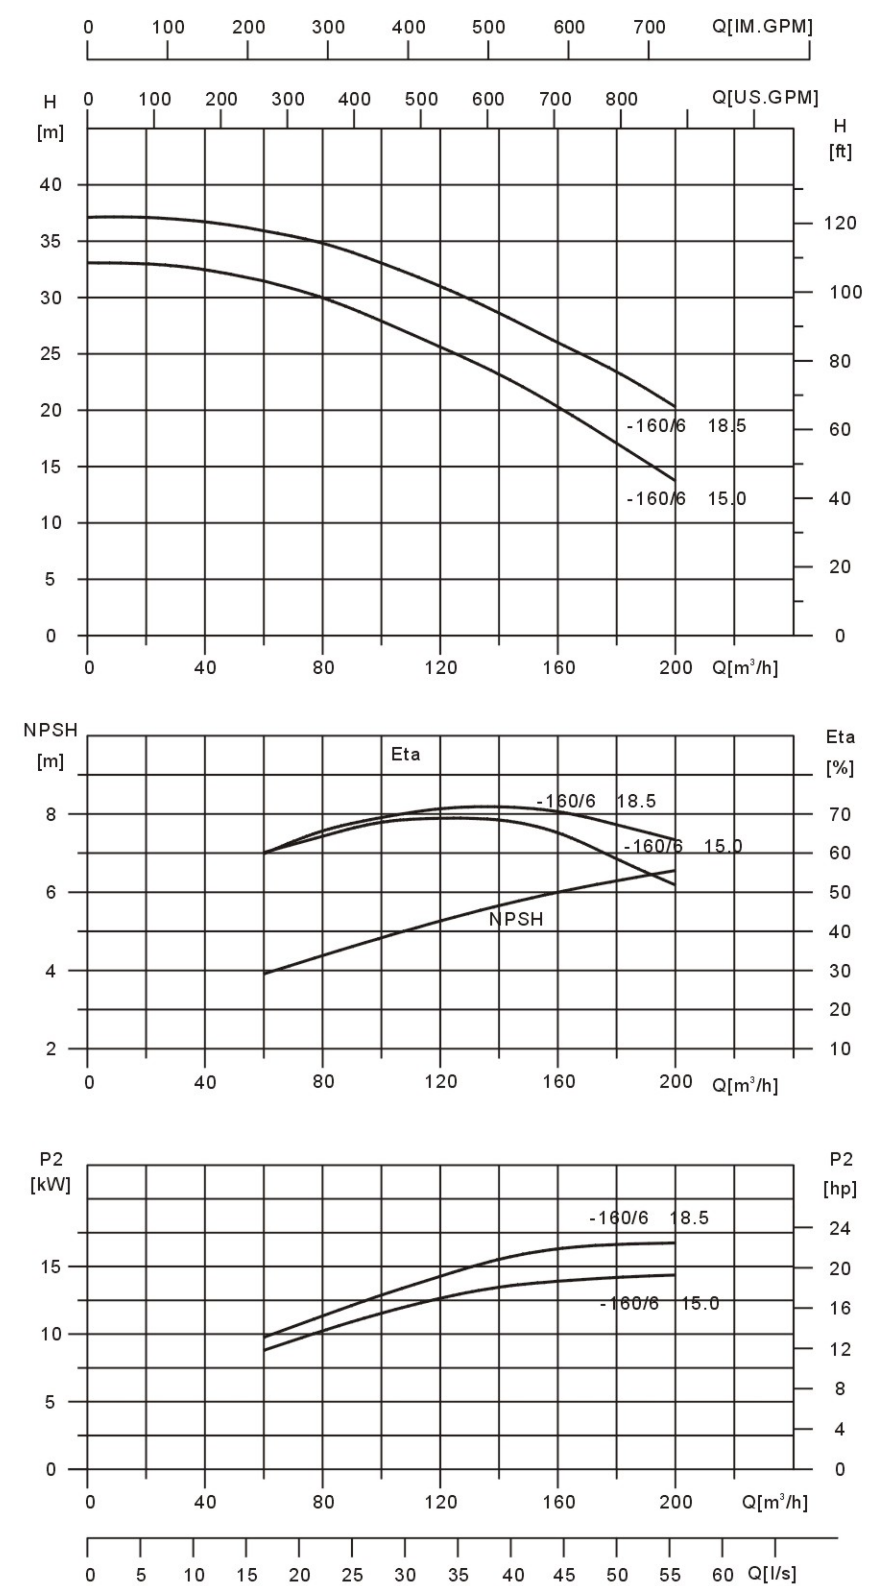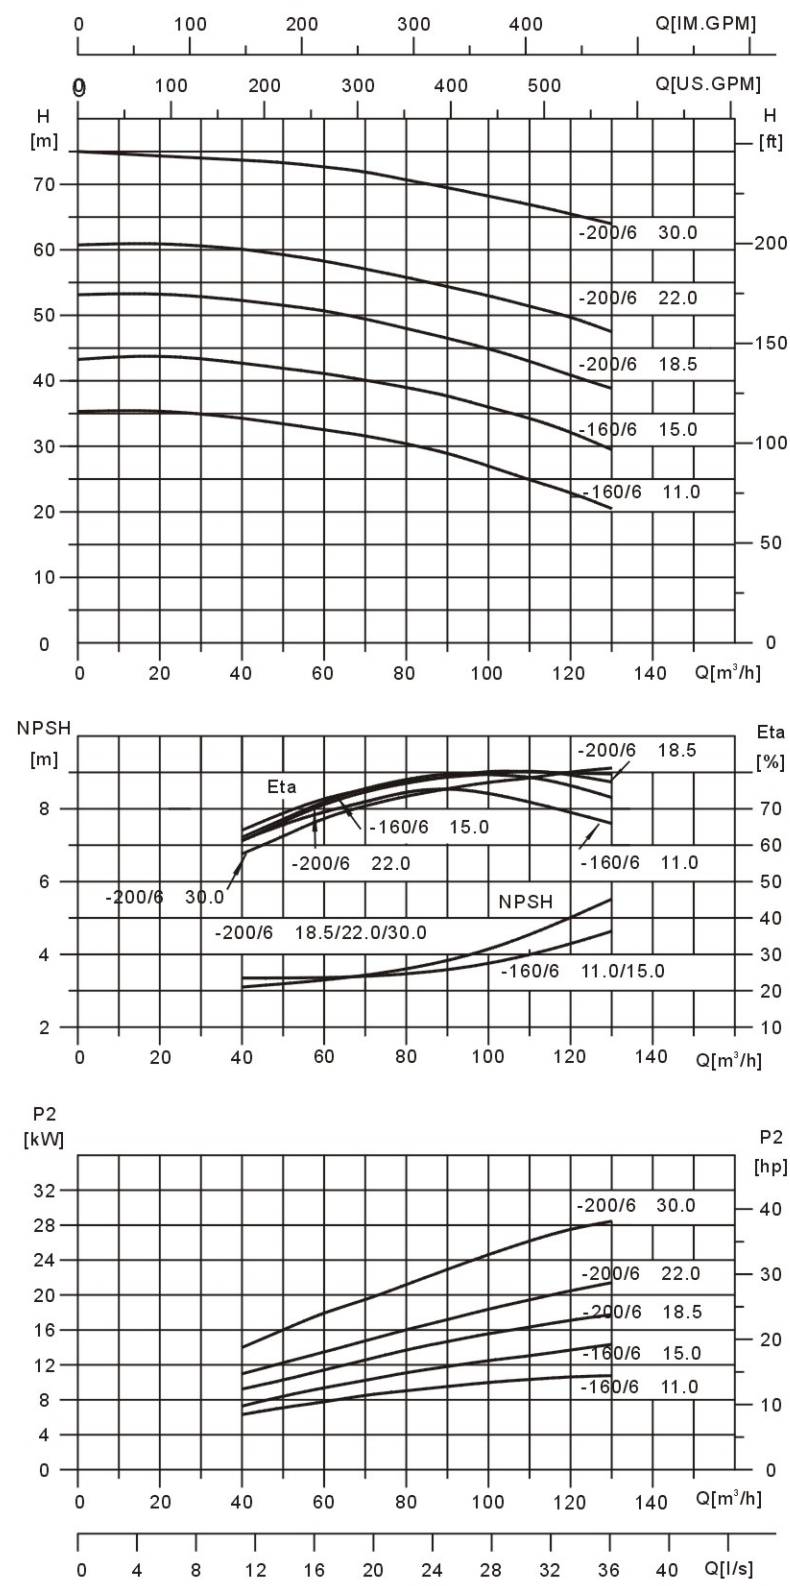

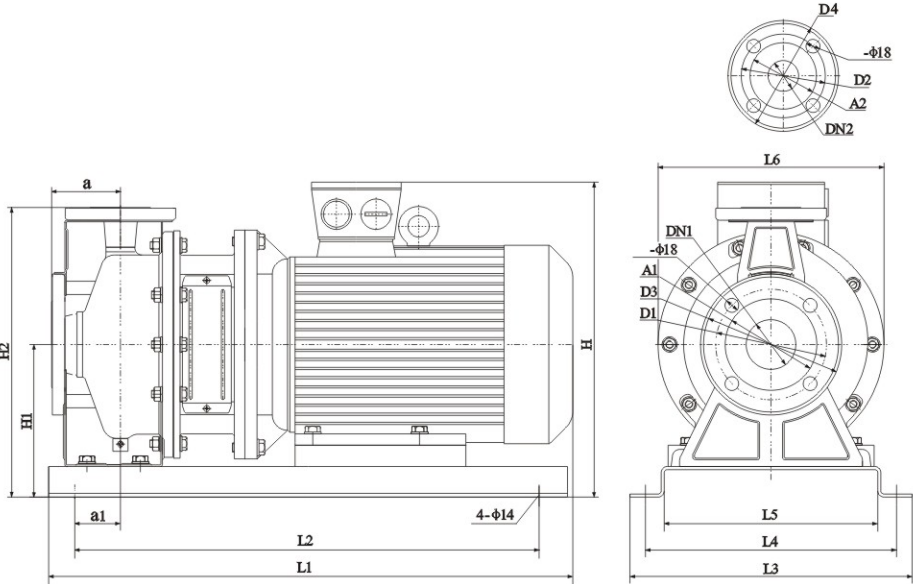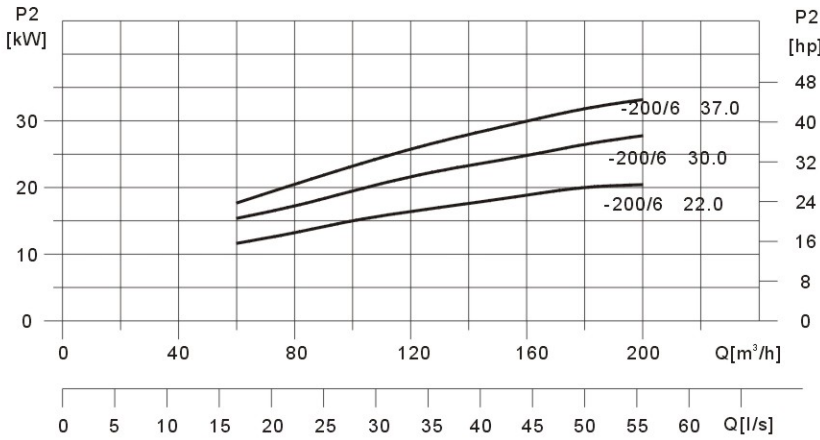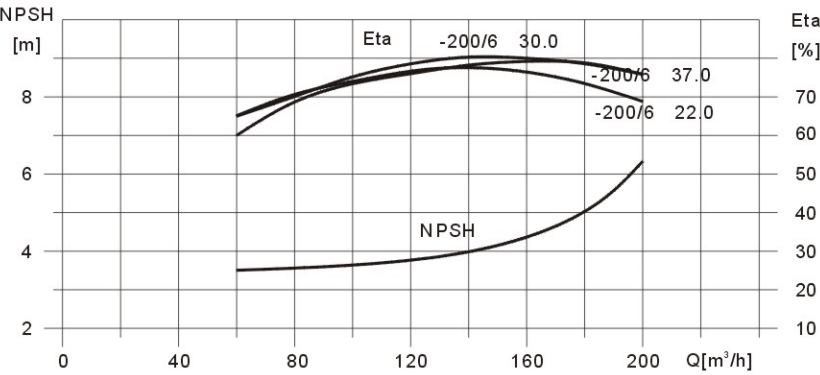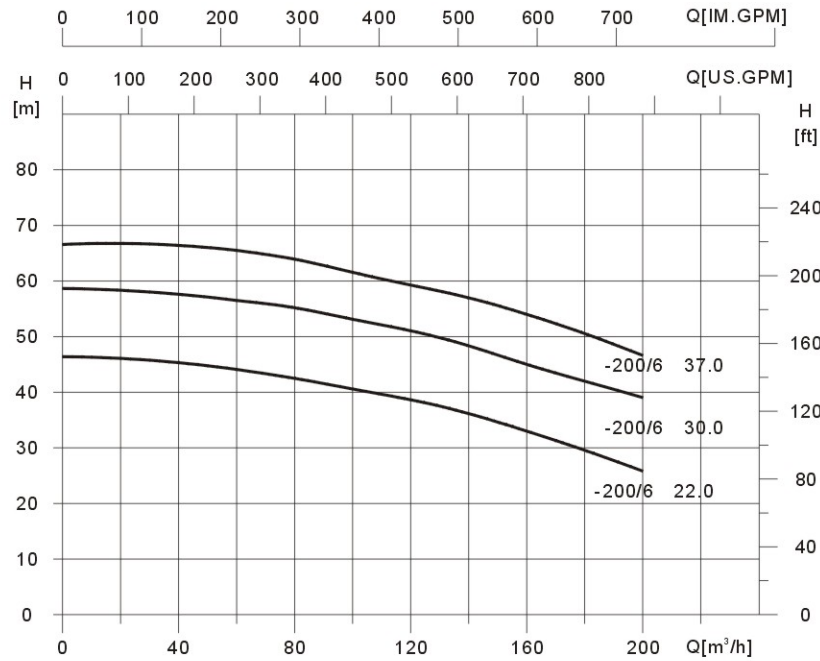

Model	Size(mm)																					
	DN1	DN2	A1	A2	D1	D2	D3	D4	n1	n2	a	a1	H	H1	H2	L1	L2	L3	L4	L5	L6	kgs
SZS50-32-160/1.1	50	32	98	75	125	100	160	139	4	4	80	32	290	152	296	470	370	280	240	192	210	31
SZS50-32-160/1.5	50	32	98	75	125	100	160	139	4	4	80	46	307	152	296	500	430	280	240	192	210	37
SZS50-32-160/2.2	50	32	98	75	125	100	160	139	4	4	80	46	307	152	296	500	430	280	240	192	210	39
SZS50-32-200/3.0	50	32	98	75	125	100	160	139	4	4	84	42	370	200	386	550	460	330	290	242	300	53
SZS50-32-200/4.0	50	32	98	75	125	100	160	139	4	4	84	47	393	200	386	560	480	330	290	242	300	58
SZS50-32-200/5.5	50	32	98	75	125	100	160	139	4	4	84	50	413	200	386	660	580	370	330	280	300	77
SZS65-40-125/1.5	65	40	118	84	145	110	185	145	4	4	80	45	307	152	294	502	430	280	240	192	210	33
SZS65-40-125/2.2	65	40	118	84	145	110	185	145	4	4	80	45	307	152	294	502	430	280	240	192	210	35
SZS65-40-125/3.0	65	40	118	84	145	110	185	145	4	4	80	45	322	152	294	532	460	300	260	212	250	47
SZS65-40-160/4.0	65	40	118	84	145	110	185	145	4	4	80	45	345	152	294	557	480	330	290	242	250	52
SZS65-40-200/5.5	65	40	118	84	145	110	185	145	4	4	100	50	413	200	380	680	580	370	330	280	300	78
SZS65-40-200/7.5	65	40	118	84	145	110	185	145	4	4	100	50	413	200	380	680	580	370	330	280	300	82
SZS65-40-200/11.0	65	40	118	84	145	110	185	145	4	4	100	50	456	200	380	790	690	420	380	330	350	161
SZS65-50-125/3.0	65	50	118	98	145	125	185	160	4	4	86	45	342	172	338	548	468	330	290	242	250	49
SZS65-50-125/4.0	65	50	118	98	145	125	185	160	4	4	86	45	365	172	338	570	490	330	290	242	250	54
SZS65-50-160/5.5	65	50	118	98	145	125	185	160	4	4	100	50	413	200	380	680	580	370	330	280	300	78
SZS65-50-200/7.5	65	50	118	98	145	125	185	160	4	4	100	50	413	200	380	680	580	370	330	280	300	82
SZS65-50-200/9.2	65	50	118	98	145	125	185	160	4	4	100	50	413	200	380	680	580	370	330	280	300	85
SZS65-50-200/11.0	65	50	118	98	145	125	185	160	4	4	100	50	456	200	380	790	690	420	380	330	350	161
SZS65-50-200/15.0	65	50	118	98	145	125	185	160	4	4	100	50	456	200	380	790	690	420	380	330	350	171
SZS65-50-200/18.5	65	50	118	98	145	125	185	160	4	4	100	50	456	200	380	830	730	420	380	330	350	188
SZS80-65-125/5.5	80	65	130	118	160	145	200	185	8	4	100	50	413	200	380	690	590	370	330	280	300	79
SZS80-65-125/7.5	80	65	130	118	160	145	200	185	8	4	100	50	413	200	380	690	590	370	330	280	300	83
SZS80-65-125/9.2	80	65	130	118	160	145	200	185	8	4	100	50	413	200	380	690	590	370	330	280	300	87
SZS80-65-160/11.0	80	65	130	118	160	145	200	185	8	4	100	50	456	200	400	790	690	420	380	330	350	163
SZS80-65-160/15.0	80	65	130	118	160	145	200	185	8	4	100	50	456	200	400	790	690	420	380	330	350	173
SZS80-65-200/18.5	80	65	130	118	160	145	200	185	8	4	100	50	476	220	445	830	730	420	380	330	350	190
SZS80-65-200/22.0	80	65	130	118	160	145	200	185	8	4	100	50	500	220	445	880	780	455	415	365	350	220
SZS80-65-200/30.0	80	65	130	118	160	145	200	185	8	4	100	50	550	240	465	950	850	495	455	405	400	292
SZS100-80-160/11.0	100	80	150	130	180	160	220	200	8	8	125	75	476	220	445	830	730	420	380	330	350	163
SZS100-80-160/15.0	100	80	150	130	180	160	220	200	8	8	125	75	476	220	445	830	730	420	380	330	350	173
SZS100-80-160/18.5	100	80	150	130	180	160	220	200	8	8	125	75	476	220	445	870	770	420	380	330	350	185
SZS100-80-200/22.0	100	80	150	130	180	160	220	200	8	8	125	75	500	220	470	915	810	455	415	365	350	223
SZS100-80-200/30.0	100	80	150	130	180	160	220	200	8	8	125	75	550	240	490	985	880	495	455	405	400	295
SZS100-80-200/37.0	100	80	150	130	180	160	220	200	8	8	125	75	550	240	490	985	880	495	455	405	400	315

Technical drawing of a centrifugal pump assembly, showing side, front, and top views with dimension labels.

Side View (Left):

- a:** Dimension across the top of the pump housing.
- H2:** Total height of the pump assembly.
- H1:** Height from the base to the center of the pump.
- a1:** Dimension from the base to the center of the pump.
- L2:** Length of the pump housing.
- L1:** Total length of the pump assembly.
- 4-φ14:** Four mounting holes with diameter 14.
- H:** Height of the motor.

Front View (Right):


- L6:** Total width of the pump assembly.
- DN1:** Nominal diameter of the inlet.
- φ18:** Diameter of the inlet.
- A1, D3, D1:** Dimensions related to the inlet and pump housing.
- L5:** Width of the pump housing.
- L4:** Width of the base.
- L3:** Total width of the base.

Top View (Top Right):

- D4:** Diameter of the top flange.
- φ18:** Diameter of the top flange.
- D2:** Diameter of the top flange.
- A2:** Dimension across the top flange.
- DN2:** Nominal diameter of the outlet.

29

Installation Struction(18.5kW)

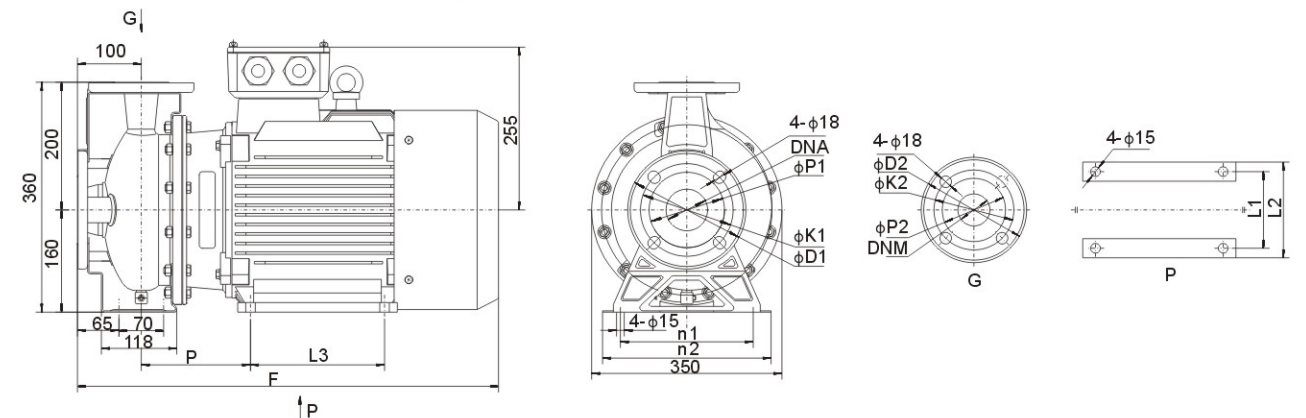30