

Type BFOS

Bag filter housing

The filter housing series BFOS are welded stainless steel constructions to install a filter bag size 1 (0,25 m²) or size 2 (0,5 m²). The cylindric vessel is equipped with a casted hinged lid and a casted basket support. The top cover is to fold away, equipped with eyebolts and sealed with an O-ring. The filter bags certainly fixed with a special downholder to provide an optimum sealing without any bypass. The design of the housing allows the use of Standard and High Efficiency bags and a wide variety of O-ring materials with no change in design. The stainless steel support basket ensures a pressure-proof support of the installed filter bag. The inlet flange (N1) is located sidewise to the shell of the body and the outlet flange (N2) to the bottom head. Optional with sidewise outlet. Additional connections on both sides and a cast-bolting allow fast mounting of a diff. pressure gauge. The filter housings are internally and externally electropolished and delivered with a adjustable tripod stand.

TECHNICAL DATA

BFOS

Inlet- and Outlet connection (N1/N2)	DN50 / DN80 / Rp2"
Vent, Pressure Gauge (N3, N4)	Rp 1/4
Drain (N5)	Rp 1/2
Diff. pressure gauge (N6, N7)	Rp 1/4
Material	AISI 304 / AISI 316*1
Gasket	O-ring FPM*2
Max. Pressure	10 bar
Max. Temperature	-10/+80°C

*1 available on request

*2 other gasket materials are possible

ORDERING INFORMATIONS OF FILTER HOUSINGS BFOS

BFOS2-10/F50-A2	
Housing type	Material
BFOS = Bag filter-sidelineer	A2 = Stainless Steel AISI 304
Bag filter size	A4 = Stainless Steel AISI 316 (on request)
1 = size 1, ca. 0,25 m ²	Connection
2 = size 2, ca. 0,50 m ²	F50 = Flange DN50 PN16; DIN 2633, C
Pressure	F50S = Flange DN50 PN16; DIN 2633, C*
10 = 10 bar	F80 = Flange DN80 PN16; DIN 2633, C
	F80S = Flange DN80 PN16; DIN 2633, C*
	G50 = Bushing Rp 2"

*with sidewise outlet (only for bag size 2)



CONSTRUCTION

- Declaration of conformity acc. DGRL 2014/68/EU • Classification acc. Art.4, Paragraph 3
- Approved for the operation with fluids only of group 2 (not dangerous)

DIMENSIONS

Optional: with sidewise outlet (only for bag size 2) / plus bushing 2 inch

vessel type	filter area (m ²)	connection in/out (N1/N2)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
BFOS1-F50-A2	~0,25	DN50 PN16	110	556	765	Ø204	max. 275
BFOS2-F50-A2	~0,5	DN50 PN16	110	920	1130	Ø204	max. 275
BFOS2-F80-A2	~0,5	DN80 PN16	110	920	1130	Ø204	max. 275

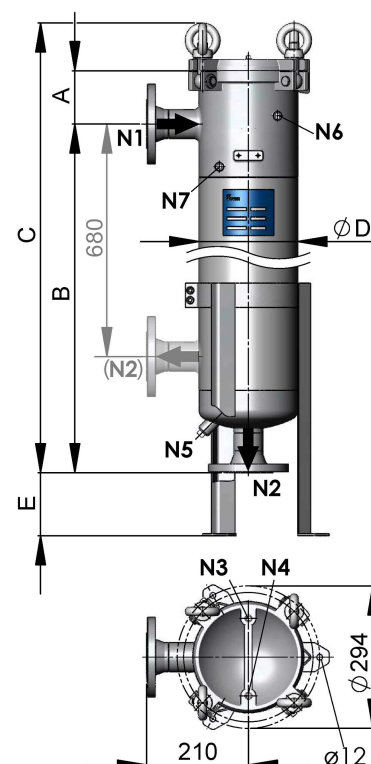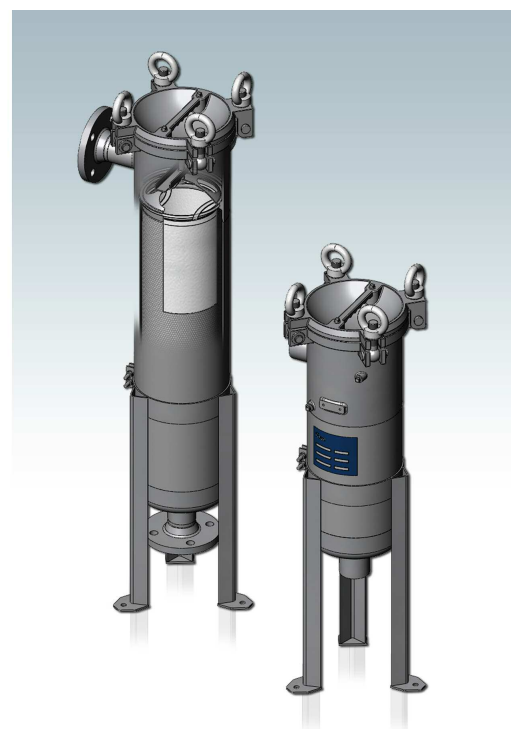

OPTIONAL

differential pressure gauge mounted

