


CERTIFICADO DE CALIDAD DE MATERIALES



Vallourec Soluções Tubulares do Brasil S.A.
Barreiro Plant - Av. Olinto Meireles, 65
ZIP 30640-010 - Belo Horizonte, MG



Inspection Certificate

(According to DIN EN 10204.3.1)

Nº.: 0050816516 / 00

Sheet:1 / 2

Customer: F. EBERHARDT S.A.

Country: Peru

Material Number: 280528

Work Order: 628663 / 10

Customer Order: 2021/012

Inspection: Vallourec Soluções Tubulares do Brasil S.A.

DESCRIPTION OF PRODUCTS: SEAMLESS STEEL PIPE, HOT FINISHED , PLAIN ENDS , AS ROLLED
DIMENSIONS: 114,30 mm X 3,60 mm **GRADE:** ASTM A 192
STANDARD: ASTM A 192M - 17 ASTM A 450M - 18 A
SURFACE PROTECTION: EXTERNAL: LACQUER **PIPE ENDS PROTECTOR:** PLASTIC CAP
TOLERANCES: OUTSIDE DIAMETER (PIPE BODY): -1,20 mm / +0,40 mm **WALL THICKNESS:** +1,01 mm
LENGTH: FIXED 9000,00 mm - 9100,00 mm **TOLERANCES:** -0,00 mm \ +100,00 mm
STANDARD MARKING: Paint stenciled in the pipe body: MANUFACTURER ASTM A 192M HF 114,30 X 3,60 HEAT NUMBER SEQ \$SEQNUMBER\$ VSB LOGO
SHIPPING MARKING: MADE IN BRAZIL * CALLAO / PERU * F. EBERHARDT S.A. * No 2021/012. 600927/10

Heat	Pieces
194847	393
194848	445
Total	838

THE PRODUCT IS SATISFACTORY IN THE FOLLOWING TESTS / INSPECTIONS: DIMENSIONAL # VISUAL # FLATTENING TEST # FLARING TEST # HYDROSTATIC TEST: 7,0 MPA 5 S #

Chemical Composition (%)

Process: Basic Oxygen Furnace, heats fully killed

		C	Mn	P	S	Si
Heat Analysis	Min	0,060	0,27			
	Max	0,180	0,63	0,035	0,0350	0,25
Product Analysis	Min	0,060	0,27			
	Max	0,180	0,63	0,035	0,0350	0,25
Heat	Control Lot					
194847	030003716414	0,116	0,44	0,009	0,0070	0,20
194848	030003716415	0,124	0,45	0,009	0,0018	0,20

Hardness Test

Scale: HRB

Required: Min

Max 77,0

Heat	Control Lot	
194847	030003716414	67,5
194848	030003716415	70,0

Remarks:

We hereby certify that this product has been manufactured and examined in accordance with all requirements of the standards and specifications and all the results are found to be satisfactory. This testimonial and certificate respectively is recorded by a computer system and is valid without signature. Alteration or use for others products are regarded as falsification of documents and will be subject to criminal jurisdiction.

QUALITY CONTROL DEPARTMENT

FAX: (55-31) 2141- 5365

e-mail: carlos.horta@vstubos.com


CARLOS EDUARDO LIMA HORTA
TECHNICAL RESPONSIBLE

DATE

03.15.2022

Certificate of Analysis

Page 1

(No. COA002371)

Kemper System America, Inc. | 1200 North America Dr. | 14224 West Seneca

Product Description: P101S-A PENETRANT GLOBAL 354G

Product No.:	40081	Lot:	2024080001
Date of Entry:	08/30/24	Release Date:	08/30/24
		Best before:	08/30/29

HALOGEN TESTING

Feature / Inspection Method	Actual Value	Unit	LTL	UTL
CHLORINE CONTENT (ASME BPCD SEC V SD-8	0.00000	%		+0.10000
SULPHUR CONTENT (ASME BPCD SEC V SD-12	0.00000	%		+0.10000
FLOURINE CONTENT (ASME BPCD SEC V SE-16	0.00000	%		+0.10000
TOTAL HALOGEN CONTENT (ASME T-641)	0.00000	%		

City, Date:West Seneca, 08/30/24

Signed by

Stephen Nowicki

Kemper System America, Inc.
1200 North America Dr.
West Seneca, NY 14224

Phone No.: 716-558-2971
Fax No.: 716-558-2967
Homepage: www.kempersystem.net



ACE Scanner

Certificate of Analysis

Page 1

(No. COA002372)

Kemper System America, Inc. | 1200 North America Dr. | 14224 West Seneca

Product Description: D101-A DEVELOPER GLOBAL 340G

Product No.:	40083	Lot:	2024080002
Date of Entry:	08/29/24	Release Date:	08/30/24
		Best before:	08/29/29

INCOMING QC of D101-A

Using QSF 970 Aerosol Evaluation Form, determine if the performance is passing or failing.

Feature / Inspection Method	Actual Value	Unit	LTL	UTL
CHLORINE CONTENT (ASME BPCD SEC V SD-8	0.00000	%		+0.10000
SULPHUR CONTENT (ASME BPCD SEC V SD-12	0.00000	%		+0.10000
FLOURINE CONTENT (ASME BPCD SEC V SE-16	0.00000	%		+0.10000
TOTAL HALOGEN CONTENT (ASME T-641)	0.00000	%		

City, Date:West Seneca, 08/30/24

Signed by

Stephen Nowicki

Kemper System America, Inc.
1200 North America Dr.
West Seneca, NY 14224

Phone No.: 716-558-2971
Fax No.: 716-558-2967
Homepage: www.kempersystem.net



ACE Scanner

Certificate of Analysis

(No. COA002378)

Kemper System America, Inc. | 1200 North America Dr. | 14224 West Seneca

Product Description: C101-A CLEANER GLOBAL 340G

Product No.:	40085	Lot:	2024080004
Date of Entry:	08/30/24	Release Date:	08/30/24
		Best before:	08/30/29

HALOGEN TESTING

Feature / Inspection Method	Actual Value	Unit	LTL	UTL
CHLORINE CONTENT (ASME BPCD SEC V SD-8	0.00000	%		+1.00000
SULPHUR CONTENT (ASME BPCD SEC V SD-12	0.00000	%		+1.00000
FLOURINE CONTENT (ASME BPCD SEC V SE-16	0.00001	%		+1.00000
TOTAL HALOGEN CONTENT (ASME T-641)	0.00001	%		

City, Date:West Seneca, 09/04/24	Signed by	B Applewhite
----------------------------------	-----------	--------------

Kemper System America, Inc.
1200 North America Dr.
West Seneca, NY 14224

Phone No.: 716-558-2971
Fax No.: 716-558-2967
Homepage: www.kempersystem.net





INTER ANDEAN TRADING SAC

RUC N°20511393648
GUÍA DE REMISIÓN ELECTRÓNICA
REMITENTE
N° EG07 - 00001011

Fecha y hora de emisión : 30/01/2025 12:23 PM

Punto de Partida JR. CASTROVIRREYNA 174 BREÑA LIMA - BREÑA - LIMA - LIMA

Fecha de entrega de Bienes al transportista:30/01/2025

Motivo de Traslado :OTROS

Punto de Llegada CAR. PARCELLA 16758A NR. LA PERLA SECTOR 3 CABEZAS - COISHCO - SANTA - ANCASH

Descripción de Motivo :SERVICIO DE CORTE

Datos del Destinatario :CONMETAL Y SERVICIOS E.I.R.L. - REGISTRO ÚNICO DE CONTRIBUYENTES N° 20532059250

Bienes por transportar:

N°	Bien normalizado	Código de Bien	Código producto SUNAT	Partida arancelaria	Código GTIN	Descripción Detallada	Unidad de medida	Cantidad
1	NO					PLANCHA ESTRUC A-36 9.0MM X 1500MM X 3000MM	UNIDAD (NIU)	15.00
2	NO					PLANCHA ESTRUC A-36 12 MM X 1500MM X 6000MM	UNIDAD (NIU)	2.00
3	NO					PLANCHA GLAC A-36 32.0MM X 1200MM X 2400MM	UNIDAD (NIU)	6.00
4	NO					PESTRUC A-36 9.0MM X 1500MM X 6000MM	UNIDAD (NIU)	4.00
5	NO					PESTRUC A-36 4.5MM X 1500MM X 3000MM	UNIDAD (NIU)	16.00
6	NO					PLANCHA ACERO INOX. A-240 C-304 L 3.0MM X 1500 X 3000 2B-PVC	UNIDAD (NIU)	9.00

Unidad de Medida del Peso Bruto: TNE

Peso Bruto total de la carga: 18

Datos del traslado:

Modalidad de Traslado:Público

Indicador de retorno de vehículo con envases o embalajes vacíos: NO

Indicador de transbordo programado:NO

Indicador de traslado en vehículos de categoría M1 o L:NO

Indicador para registrar vehículos y conductores del transportista:NO

Datos del transportista:

LOGISTICA Y TRANSPORTES S & P E.I.R.L. - REGISTRO ÚNICO DE CONTRIBUYENTES N° 20609059207

Número de registro del MTC15135104CNG

FORCE WELDING
CERTIFICATE OF QUALITY

CERTIFICATE No. 190720-4 FURCHARSER MARWELD PERU SAC CONTRACT No. SE190619

DESIGNATION ER70S-6 WEIGHT (Kg) 2000 PURCHASE SPEC.No. SE2019-010

SIZE ϕ2.4mm LOT No. 2204064 MATERIAL SPECIFICATION AWS A 5.18

CHEMICAL COMPOSHTON											
LOT No.	C	Mn	Si	P	S	Cr	Ni	Cu	Mo	V	
19070732	0.072	1.47	0.85	0.013	0.011	0.010	0.014	0.15	0.03	0.002	
Typical mechanical properties of deposited metal											
LOT No.	Yield point $\sigma_{0.2}$ MPa		Tensile Strength σ_b MPa			Elongation δ_5 %		V-Type charpy Impact Value (-29°C)J			
19070732	450		545			28.5		74.7			
RESULT OF EXAMINATION	IN ACCORDANCE WITH GB/T8110-95 （As AWS A5.18ER70S-6）OF WELDING WIRES						PERSON- IN - CHARGE OF QUALITY EXAMINATION				



FARINA (JINAN) WELDTEC & MACHINERY CO.,LTD

MILL CERTIFICATE


Invoice NO.		FW240927DR		Specification			E71T-1C		Lot No.		T124101203	
Classification		AWS A5.20 E71T-1C		Size			1.2mm		Date of Issue		2024.11.10	
Chemical Composition of Deposited Metal (%)												
Elements	C	Mn	Si	S	P	Cr	Ni	Mo	V			
Requirement	0.18 max	2.0 max	0.90 max	0.03 max	0.03 max	0.20 max	0.50 max	0.30 max	0.08 max			
Actual Result	0.85	1.30	0.43	0.011	0.011	0.02	0.010	0.02	0.02			
Mechanical Properties of Deposited Metal								Welding Condition				
	Yield Strength Mpa	Tensile Strength Mpa	Elongation %	Test Temperature (°C)		Impact Resistance (J)		Welding position	Welding Current	Welding Voltage	Shielding Gas	
Requirement	390 min	480 min	22 min	-20		47min		Flat	120~320	16~34	100% CO2	
Actual Result	470	557	28	-20		106/107/108		Horizontal	120~280	16~29		
Bending Test		Fillet Welding Test		X Ray Test				Overhead	120~240	16~28		
Face Bending	Back Bending							Vertical Up	120~240	16~27		
OK	OK							Vertical Down	120~260	16~29		
We hereby certify that this report is correct and that all test results are in compliance with the specification describe herein.							WELDTEC & MACHINERY Inspeciton Stamp 济南法瑞焊接 器材股份有限公司			Inspector		



FICHA TÉCNICA

Alambre Tubular

AWS E71T - 1C

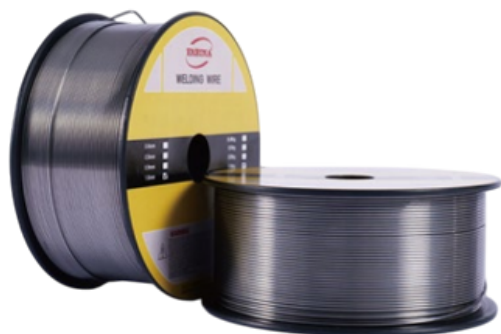

Alambre de soldadura con núcleo de titanio CO2 protegido con gas para acero con bajo contenido de carbono y acero de alta resistencia.

Especificaciones técnicas

Composición química del alambre de soldadura

C	Mn	Si	P	S	V	Cr	Ni	Mo	Cu
0.04	1.30	0.40	0.011	0.005	0.01	0.02	0.02	0.01	0.006

Propiedades mecánicas típicas del metal depositado

Fuerza de rendimiento (Mpa)	Resistencia a la tensión (Mpa)	Alargamiento	Prueba de impacto		Gas de protección
			Temperatura	Energía de impacto	
520	580	24	-20° C	122	100 % CO2

Aplicaciones :

Medidas: Diametro

1.2 MM

1.6 MM

Se utiliza para soldar estructuras de acero al carbono y acero estructuras de baja aleación con una resistencia a la atracción de 490 MPa o superior. Utilizado para construcción naval, fabricación mecánica, calderas, maquinaria química y maquinaria de elevación