


The **Zenith B Series pumps** are designed to provide stable, precise and repeatable flow control of process fluid despite variations in temperature, viscosity, and pressure. The Zenith B Series pumps are broadly applied to metering services such as colorings, catalysts, resins, flavorings, perfumes, vitamins, oils, adhesives, coatings, paints/varnishes, polymers, lubricants, dyes, defoamers, pharmaceuticals, urethanes, fuels and viscose.



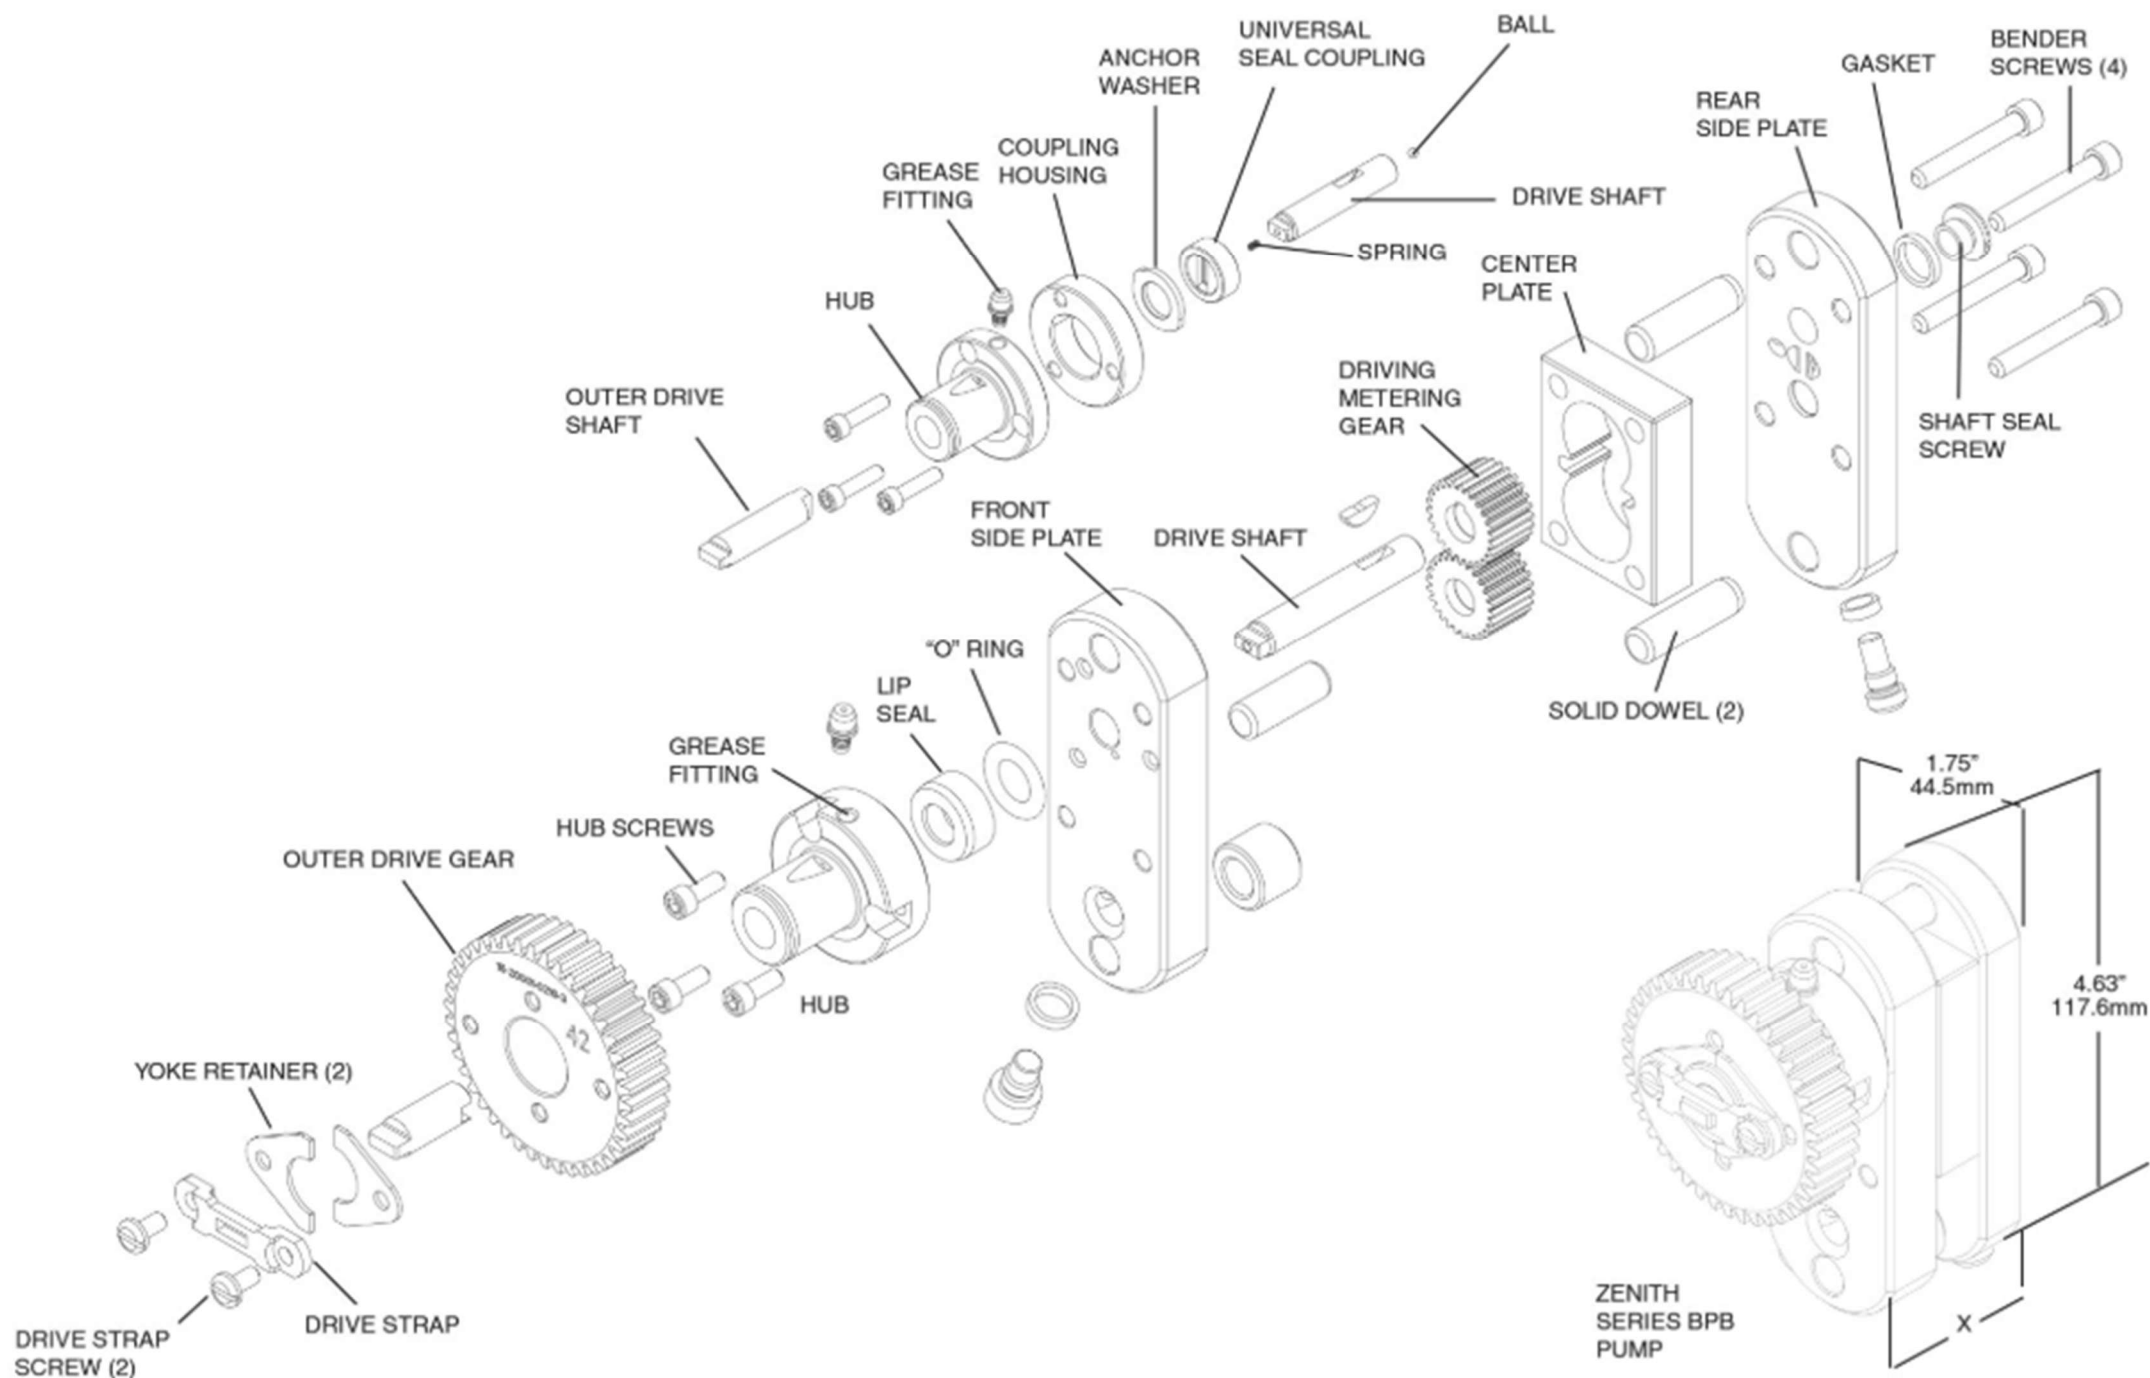

B Series : Model & Specifications

	BPB Series	BMB Series	BMC Series	BLB Series	BXB Series
Capacity	0.16-2.92 cc /rev	5-6 cc /rev	11.1-27.8 cc /rev	5-100 cc /rev	100-200 cc /rev
Flow rate	0.025 - 8.3 GPH	0.88 - 16 GPH	1.79 - 79.3 GPH	0.8 - 285 GPH	15.85 - 570 GPH
Operating Temperature	Max. 300F (150 °C)				
Inlet Pressure	Up to 500 psi	Up to 300 psi	Up to 300 psi	Up to 500 psi	Up to 300 psi
Discharge Pressure	Up to 1,500 psi	Up to 1,000 psi	Up to 500 psi	Up to 3,000 psi	Up to 3,000 psi
Viscosity Range	Up to 100,000 cp	Up to 100,000 cp	Up to 100,000 cp	Up to 500,000 cp	Up to 2,000,000 cp