

Volute Casing Pumps

NOW 32125...200250

SIHI-HALBERG



TECHNICAL DATA

Capacity:	2 – 740 m ³ /h
Head:	2 – 100 m
Speed:	up to 3600 rpm
Temperature:	up to 170 °C
Casing pressure:	up to 10 bar
Shaft seal:	stuffing box or mechanical seal
Direction of rotation:	clockwise looking towards shaft end


APPLICATION

Volute casing pumps of the NOW range are used in all applications involving the trouble-free handling of clean or turbid, non-aggressive liquids which do not contain any solid constituents. Hence they are suitable for

- drinking water supply of local communities
- general water supply duty in agriculture, trade and industry
- irrigation and draining
- spray irrigation
- handling of brine and lye
- circulating high temperature water up to 170 °C, cooling water and oil in heating and cooling circuits

Thanks to exceptionally favourable NPSH, pumps of the NOW range are also used with advantage for

- handling condensate.

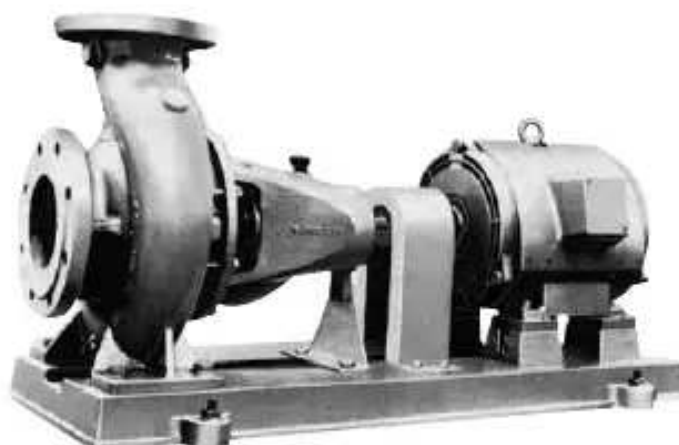

DESIGN DETAILS

Casing pressure:

- Up to 10 bar respectively from –10 °C to 120 °C
- Up to 9 bar respectively from 120 °C to 170 °C

Branch positions:

- Suction branch axial, discharge branch radially upwards.

Flanges:

- The flanges conform to DIN 2532 PN 10. Flanges drilled to ANSI.

Bearings:

- Bearing brackets 25 and 35: two deep groove ball bearings in accordance with DIN 625.
- Bearing bracket 45: one twin row angular contact ball bearing in accordance with DIN 628 at the pump end, and one deep groove ball bearing in accordance with DIN 625 at the drive end.
- Oil lubrication.
- Designation of the above pump type execution: C
- Grease lubrication of the bearings is possible.
- Designation of the above pump type execution: B

Direction of rotation:

- Clockwise as viewed from the drive towards the pump.

Shaft sealing:

- Sealing of the shaft can be effected either by a stuffing box or mechanical seal, as required.

- Designation 041: Self-sealed, uncooled stuffing box. Temperature range: –10 °C to 110 °C
- Designation 051: Uncooled stuffing box with sealing fluid from an outside source and flushing. Temperature range: –10 °C to 110 °C
- Designation 501: Soft packed stuffing box with superimposed cooling compartment for the intensive cooling of the seal unit. Temperature range: up to 170 °C
- Designation BKW: Unbalanced single mechanical seal of elastomeric bellows design, NBR, with self-contained circulation. Temperature range: from –10 °C to 60 °C
- Designation BKS: Unbalanced single mechanical seal with elastomeric bellows, FKM, with self-contained circulation. Temperature range: from –10 °C to 60 °C
- Designation BK3: Unbalanced single mechanical seal of elastomeric bellows design, EPDM, with self-contained circulation. Temperature range: from –10 °C to 110 °C

DESIGN

Horizontal, single-stage volute casing pumps with dimensions and nominal ratings to DIN 24255 based on the process principle, plus 24 additional sizes (NOW and WTS ranges).

The process principle allows dismantling of the complete bearing unit towards the drive end without the pump casing having to be disconnected from the piping. If a spacer type coupling is used it is also unnecessary to disconnect the motor.

Through use of the building block principle, the range requires only three bearing housings. Within a given shaft unit, shaft, shaft seal, impeller nut and bearings are interchangeable.

NOW

Materials of construction:

Part No.	PUMP ART	MATERIALS OF CONSTRUCTION						
		0 B	0 C	0 E	0 R	0 S	0 U	3 B
10.2 16.1	Volute casing Casing cover	0.6025						2.1050.01
23.0	Impeller	0.6025	2.1050.01	1.4408	0.6025	2.1050.01	1.4408	2.1050.01
50.2	Wear ring	0.6025						2.1052.02
21.1	Shaft	1.0503			1.4021			1.4571
52.4	Shaft sleeve (Stuffing box)	1.4122	2.1052.02	1.4122		2.1052.02	1.4122	2.1052.02
52.3	Shaft sleeve (Mechanical seal)	1.4571						
46.1	Stuffing box	Soft packing						
43.3	Shaft seal Mechanical seal	Silicon carbide / Silicon carbide, NBR or FKM Silicon carbide / Carbon, EPDM						

Casing gasket:

The casing is sealed by means of a flat gasket. Designation of this version: 2.
Confined gasket is possible. Designation of this version: 3.

Drive / speed:

By means of commercially available electric motors, Type B 3. The following maximum speeds should be observed:

Pump size	Maximum speed rpm	Pump size	Maximum speed rpm	Pump size	Maximum speed rpm
32125 32160 32200 40125 40160 40200 50125 50160 50200 65125 65160	3600	32250 ¹⁾ 40250 ¹⁾ 50250 ¹⁾ 65200 ¹⁾ 65250 ¹⁾ 80160 ¹⁾ 80200 ¹⁾ 80250 ¹⁾ 100160 ¹⁾ 100200 ¹⁾ 100250 ¹⁾ 125200 ¹⁾	3000	40315 50315 65315 80315 80400 100315 100400 125250 125315 125400 150200 150250 150315 150400 200250	1800

¹⁾ Higher speeds on reinforced bearings possible – please consult us.

Max. shaft loading $\frac{P_N \text{ in kW}}{n \text{ in rpm}}$ for temperatures of liquid handled $\leq 20^\circ\text{C}$

Bearing housings	Shaft material	
	1.0503 ²⁾	1.4021 ²⁾
25	0,011	0,012
35	0,026	0,032
45	0,052	0,072

²⁾ In case impellers are of G-CuSn material the values for 1.0503 shafts apply.

General notes:

The following additional designs are available:


WTS additional sizes to DIN 24 255 for capacities up to 2200 m³/h

We shall be pleased to supply technical information on this range on request.

Sectional drawings and list of parts

Note: Some sizes do not conform to the drawing in all details.


041
Uncooled
soft packed
stuffing box

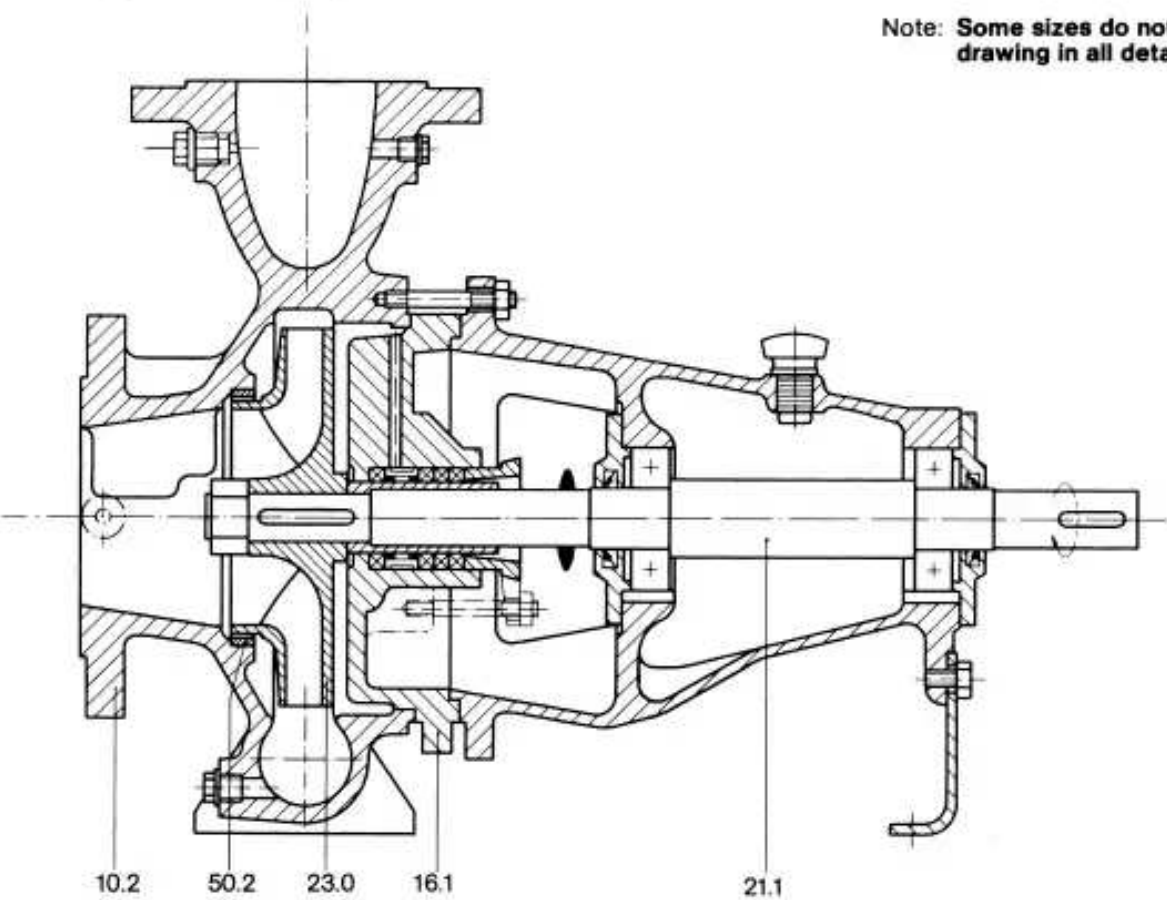

- | | | |
|--------------------|----------------------|-------------------|
| 10.2 Volute casing | 23.0 Impeller | 50.2 Wear ring |
| 16.1 Casing cover | 43.3 Mechanical seal | 52.3 Shaft sleeve |
| 21.1 Shaft | 46.1 Stuffing box | 52.4 Shaft sleeve |


Other types of shaft sealing arrangement

BKW
BKS
BK3

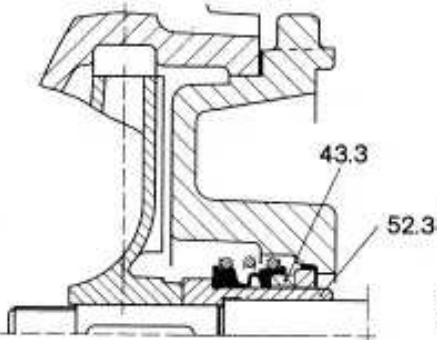


Unbalanced, uncooled
single mechanical seal

051

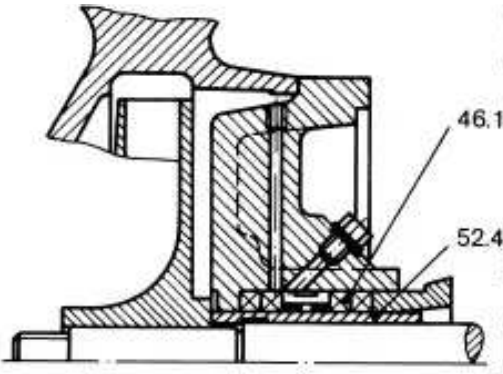

Soft packed stuffing box with sealing fluid
supplied from an outside source and flushing

501

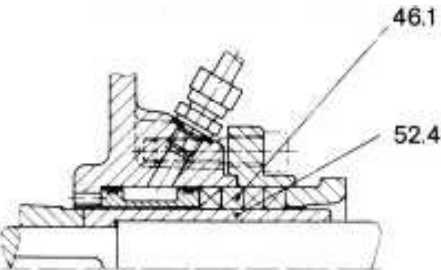

Soft packed stuffing box designed for intensive
cooling

Selection table

Values at n = 2900 rpm

H Head [m]	Q ► Capacity [m³/h]															
	6	8	10	12	15	20	25	30	35	40	45	50	60	70	80	
10		32125-0,75 0,8 0,6	32125-0,75 0,9 0,68	32125-1,1 1,1 0,74	32125-1,1 1,3 0,91	40125-1,1 1,4 0,96	40125-1,5 1,6 1,14	40125-2,2 2,0 1,5		50125-2,2 2,6 1,8	50125-3 2,8 1,9	50125-3 3,0 2,1				
12	32125-0,75 0,7 0,65	32125-1,1 0,8 0,69	32125-1,1 0,9 0,74	32125-1,5 1,1 0,82	40125-1,1 1,2 0,93	40125-1,5 1,4 1,09	40125-2,2 1,6 1,33	40125-2,2 2,0 1,63	50125-2,2 2,3 1,8	50125-3 2,6 2,0	50125-3 2,8 2,2	50125-3 3,0 2,4	50125-4 3,5 2,8	65125-5,5 2,3 4,1	65125-5,5 2,6 4,4	
14	32125-1,1 0,7 0,68	32125-1,1 0,8 0,75	32125-1,1 0,9 0,81	32125-1,1 1,1 0,9	32125-1,5 1,3 1,08	40125-1,5 1,4 1,25	40125-2,2 1,6 1,51	40125-2,2 2,0 1,82	50125-3 2,3 2,1	50125-3 2,6 2,3	50125-3 2,8 2,5	50125-3 3,0 2,6	50125-4 3,5 3,2	65125-5,5 2,3 4,1	65125-5,5 2,6 4,5	
16	32125-1,1 0,7 0,75	32125-1,1 0,8 0,83	32125-1,1 0,9 0,89	32125-1,5 1,1 0,99	32125-1,5 1,3 1,15	32125-2,2 1,9 1,66	40125-2,2 1,6 1,68	40125-3 2,0 2,0	50125-3 2,3 2,3	50125-3 2,6 2,6	50125-4 2,8 2,8	50125-4 3,0 3,0	50125-4 3,5 3,6	65125-5,5 4,2 4,4	65125-5,5 2,6 4,7	
18	32125-1,1 0,7 0,8	32125-1,1 0,8 0,91	32125-1,1 0,9 0,96	32125-1,5 1,1 1,05	32125-1,5 1,3 1,27	40125-2,2 1,4 1,57	40125-2,2 1,6 1,84	40125-3 2,0 2,2	40125-3 2,5 2,6	50125-4 2,6 2,84	50125-4 2,8 3,1	50125-4 3,0 3,3	50125-5,5 3,5 4,0	65125-5,5 4,2 4,8	65125-7,5 2,6 5,3	
20	32125-1,1 0,7 0,87	32125-1,5 0,8 0,97	32125-1,5 0,9 1,05	32125-1,5 1,1 1,14	32125-1,5 1,3 1,34	40125-2,2 1,4 1,73	40125-3 1,6 2,0	40125-3 2,0 2,4	40125-4 2,5 2,8	50125-4 2,6 3,2	50125-4 2,8 3,4	50125-4 3,0 3,6	50125-5,5 3,5 4,4	65125-7,5 4,2 5,3	65125-7,5 2,6 5,8	
22	32125-1,5 0,7 0,95	32125-1,5 0,8 1,04	32125-1,5 0,9 1,13	32125-1,5 1,1 1,24	40125-2,2 1,2 1,63	40125-2,2 1,4 1,87	40125-3 1,6 2,1	40125-3 2,0 2,6	40125-4 2,5 3,0	50125-4 2,6 3,5	50125-5,5 2,8 3,7	50125-5,5 3,0 4,0	50125-5,5 3,5 4,7	65125-7,5 4,2 5,7	65125-7,5 2,6 6,4	
24	32125-1,5 0,7 1,05	32125-1,5 0,8 1,14	32125-1,5 0,9 1,23	32160-2,2 1,2 1,67	40125-2,2 1,2 1,78	40125-3 1,4 2,0	40125-3 1,6 2,3	40125-3 2,0 2,7	50125-4 2,3 3,5	50125-5,5 2,6 3,8	50125-5,5 2,8 4,1	50125-5,5 3,0 4,4	50125-7,5 3,2 5,8	65125-7,5 2,3 6,4	65125-11 2,6 6,9	
26	32160-2,2 1,0 1,33	32160-2,2 1,0 1,42	32160-2,2 1,1 1,51	32160-2,2 1,2 1,77	40125-2,2 1,2 1,93	40160-3 1,6 2,6	40160-4 1,9 3,1	40160-4 2,4 3,5	40160-5,5 3,0 4,2	50125-5,5 2,6 4,2	50160-5,5 2,3 4,8	65125-7,5 1,8 5,9	50160-7,5 3,2 6,0	50160-11 3,9 7,3	50160-11 5,0 8,7	
28	32160-2,2 1,0 1,43	32160-2,2 1,0 1,53	32160-2,2 1,1 1,7	32160-2,2 1,2 1,91	32160-3 1,4 2,2	32160-4 2,2 2,8	40160-4 1,9 3,2	40160-5,5 2,4 3,8	40160-5,5 3,0 4,4	50160-5,5 2,1 4,7	50160-7,5 2,3 5,0	50160-7,5 2,6 5,5	50160-7,5 3,2 6,4	50160-11 3,9 7,7	50160-11 5,0 9,0	
30	32160-2,2 1,0 1,53	32160-2,2 1,0 1,63	32160-2,2 1,1 1,82	32160-3 1,2 2,0	32160-3 1,4 2,3	32160-4 2,2 3,1	40160-4 1,9 3,4	40160-5,5 2,4 3,9	40160-5,5 3,0 4,6	50160-5,5 2,1 4,9	50160-7,5 2,3 5,4	50160-7,5 2,6 5,8	50160-7,5 3,2 6,7	50160-11 3,9 8,0	50160-11 5,0 9,5	
32	32160-2,2 1,0 1,63	32160-2,2 1,0 1,74	32160-2,2 1,1 1,94	32160-3 1,2 2,1	32160-3 1,4 2,5	32160-4 2,2 3,2	40160-4 1,9 3,6	40160-5,5 2,4 4,2	50160-5,5 2,0 4,9	50160-7,5 2,1 5,3	50160-7,5 2,3 5,7	50160-7,5 2,6 6,1	50160-11 3,2 7,1	50160-11 3,9 8,5	65160-11 4,0 9,8	
34	32160-2,2 1,0 1,74	32160-2,2 1,0 1,85	32160-3 1,1 2,1	32160-3 1,2 2,3	32160-3 1,4 2,6	40160-4 1,6 3,4	40160-5,5 1,9 3,8	40160-5,5 2,4 4,4	50160-7,5 2,0 5,2	50160-7,5 2,1 5,6	50160-7,5 2,3 6,0	50160-7,5 2,6 6,5	50160-11 3,2 7,5	50160-11 3,9 8,8	65160-15 3,8 10,6	
36	32160-2,2 1,0 1,84	32160-3 1,1 1,96	32160-3 1,1 2,2	32160-3 1,2 2,4	32160-3 1,4 2,7	40160-4 1,6 3,5	40160-5,5 1,9 4,0	50160-7,5 1,8 5,1	50160-7,5 2,0 5,5	50160-7,5 2,1 5,8	50160-7,5 2,3 6,3	50160-7,5 2,6 6,8	50160-11 3,2 7,8	50160-11 3,9 9,2	65160-15 3,8 11,2	
38	32160-2,2 1,0 1,88	32160-3 1,1 2,07	32160-3 1,1 2,3	32160-3 1,2 2,5	32160-4 1,4 2,8	40160-5,5 1,6 3,7	50160-5,5 1,7 4,9	50160-7,5 1,8 5,4	50160-7,5 2,0 5,8	50160-7,5 2,1 6,2	50160-7,5 2,3 6,7	50160-11 2,6 7,1	50160-11 3,2 8,2	65160-15 3,3 10,8	65160-15 3,5 11,8	
40	32160-3 1,0 1,98	32160-3 1,0 2,18	32160-3 1,1 2,4	32160-3 1,2 2,6	32200-5,5 0,9 3,9	40200-5,5 1,5 4,2	50160-7,5 1,7 5,3	50160-7,5 1,8 5,7	50160-7,5 2,0 6,1	50160-7,5 2,1 6,5	50160-11 2,3 7,0	50160-11 2,6 7,5	50200-15 3,5 10,0	50200-15 4,4 12,1	65200-15 2,9 12,8	
45	32200-3 0,5 2,6	32200-4 0,6 2,9	32200-4 0,6 3,3	32200-4 0,7 3,6	32200-5,5 1,0 4,2	40200-5,5 1,4 4,7	40200-7,5 1,7 5,5	40200-7,5 2,1 6,6	40200-11 2,8 8,0	50200-11 2,2 7,7	50200-11 2,5 8,3	50200-11 2,8 9,1	50200-15 3,6 10,8	50200-15 4,3 13,1	65200-18,5 2,9 14,0	
50	32200-4 0,5 3,0	32200-4 0,6 3,3	32200-4 0,6 3,6	32200-5,5 0,7 3,9	32200-5,5 1,0 4,5	40200-7,5 1,4 5,1	40200-7,5 1,7 6,0	40200-11 2,1 7,2	50200-11 2,0 7,8	50200-11 2,2 8,5	50200-11 2,4 9,2	50200-11 2,7 9,9	50200-15 3,4 11,6	50200-18,5 4,0 14,0	65200-18,5 2,9 15,6	
55	32200-4 0,5 3,3	32200-5,5 0,6 3,7	32200-5,5 0,6 3,9	32200-5,5 0,7 4,3	32200-5,5 1,0 4,9	40200-7,5 1,4 5,7	40200-7,5 1,7 6,6	40200-11 2,1 7,9	50200-11 2,0 8,6	50200-11 2,2 9,4	50200-15 2,4 10,1	50200-15 2,7 10,8	50200-15 3,2 12,5	65200-18,5 2,6 15,7	65200-18,5 2,9 16,8	
60	32200-5,5 0,5 3,8	32200-5,5 0,6 4,1	32200-5,5 0,6 4,4	32200-5,5 0,7 4,7	40200-7,5 1,1 5,3	40200-7,5 1,4 6,2	50200-11 1,7 8,1	50200-11 1,8 8,8	50200-11 2,0 9,5	50200-15 2,2 10,3	50200-15 2,4 11,0	50200-15 2,6 11,8	65200-18,5 2,4 15,7	65200-22 2,6 17,1	65250-22 2,9 18,6	
65	32250-5,5 0,5 4,3	32250-7,5 1,6 6,7	32250-11 1,6 7,1	32250-11 1,7 7,5	32250-11 1,8 8,0	50200-11 1,5 8,0	50200-11 1,7 8,9	40250-15 1,8 12,7	50250-15 2,0 12,9	65200-18,5 2,1 15,0	65200-18,5 2,1 15,6	65200-18,5 2,2 16,1	65250-22 1,9 17,4	65250-22 2,3 19,4	65250-30 2,7 21,4	
70	32250-7,5 1,5 6,7	32250-11 1,6 7,3	32250-11 1,6 7,5	32250-11 1,7 7,9	32250-11 1,8 8,6	32250-15 2,0 10,3	40250-15 1,3 11,6	40250-15 1,6 13,3	50250-15 2,0 13,4	50250-18,5 2,2 14,7	50250-18,5 2,4 16,2	50250-22 2,7 17,8	65250-22 1,9 18,8	50250-30 4,1 24,3	65250-30 2,7 22,8	
75	32250-11 1,5 7,4	32250-11 1,6 7,6	32250-11 1,6 8,0	32250-11 1,7 8,5	32250-11 1,8 9,2	32250-15 2,0 10,7	40250-15 1,3 12,2	50250-15 1,8 12,8	40250-18,5 2,0 15,7	50250-18,5 2,2 15,4	50250-18,5 2,4 16,8	50250-22 2,7 18,8	50250-30 3,3 21,5	50250-30 4,1 25,1	65250-30 2,7 24,2	
80	32250-11 1,5 7,9	32250-11 1,6 8,1	32250-11 1,6 8,6	32250-11 1,7 9,0	32250-11 1,8 9,4	32250-15 2,0 11,7	40250-15 1,3 12,8	50250-15 1,8 13,4	50250-18,5 2,0 14,7	50250-18,5 2,2 16,2	50250-22 2,4 17,7	50250-22 2,7 19,2	50250-30 3,3 22,0	50250-30 4,1 25,9	65250-30 2,6 25,6	
85	32250-11 1,5 8,4	32250-11 1,6 8,6	32250-11 1,6 9,1	32250-11 1,7 9,4	32250-15 1,8 10,2	32250-15 2,0 12,8	40250-15 1,3 13,5	50250-18,5 1,6 15,3	50250-18,5 2,0 15,3	50250-18,5 2,2 16,8	50250-22 2,4 18,3	50250-22 2,7 19,7	50250-30 3,3 22,9	50250-30 4,1 26,8	65250-30 2,6 27,2	
90	32250-11 1,5 8,7	32250-11 1,6 9,1	32250-11 1,6 9,6	32250-11 1,7 9,9	32250-15 1,8 10,7	32250-15 2,0 12,9	40250-18,5 1,3 14,1	50250-18,5 1,8 15,2	50250-18,5 2,0 16,5	50250-22 2,2 17,8	50250-22 2,4 19,0	50250-30 2,7 20,4	50250-30 3,3 23,9	65250-30 2,2 26,4	65250-37 2,6 28,9	
95	32250-11 1,5 9,1	32250-11 1,6 9,6	32250-15 1,6 10,0	32250-15 1,7 10,5	32250-15 1,8 11,3	40250-15 1,1 13,1	50250-18,5 1,6 15,4	50250-18,5 1,8 16,2	50250-22 2,0 17,6	50250-22 2,2 18,8	50250-30 2,4 20,1	50250-30 2,7 21,6	50250-30 3,3 25,5	65250-37 2,2 28,3	65250-37 2,6 30,5	
100						50250-18,5 1,5 16,0	50250-22 1,6 17,0	50250-22 1,8 17,8	50250-22 2,0 19,1	50250-30 2,2 20,4	65250-30 1,6 24,5	65250-30 1,6 25,7	80250-37 2,4 33,7	80250-45 2,5 36,0	80250-45 3,0 38,2	
▲ H Head [m]	Q ► Capacity [m³/h]															
	6	8	10	12	15	20	25	30	35	40	45	50	60	70	80	

Example:

Required: capacity Q = 40 m³/h
head H = 30 m

In the Table the following is found:
Size NOW 50160
Motor rating 5.5 kW
NPSH 2.1 m
Power demand of pump 4.9 kW

NOW

Capacity [m³/h]															H Head [m]
90	100	125	150	175	200	225	250	275	300	325	350	400	500	600	▼
															10
65125-5.5 3.0 4.9															12
65125-7.5 3.0 5.1	65125-7.5 3.4 5.5														14
65125-7.5 3.0 5.3	65125-7.5 3.4 6.0	65125-11 4.7 8.1	80160-11 3.8 9.6			100160-18.5 7.5 14.6	100160-18.5 7.7 16.0	100160-22 8.4 18.5							16
65125-7.5 3.0 5.8	65125-7.5 3.4 6.5	65125-11 4.7 8.5	80160-15 3.8 10.5		100160-18.5 7 14.2	100160-18.5 7.3 16.1	100160-22 7.4 17.5	100160-30 7.9 20.7	100160-30 8.2 23.5						18
65125-7.5 3.0 6.4	65125-11 3.4 7.1	80160-11 3.4 9.5	80160-15 3.8 11.3	80160-15 4.5 13.6	100160-18.5 6.9 15.8	100160-22 7.1 17.1	100160-22 7.2 19.5	100160-30 7.7 22	100160-30 7.8 25.0						20
65125-11 3.0 7.0	65125-11 3.4 7.6	65160-15 5.1 11.2	80160-15 3.8 12.2	80160-18.5 4.5 14.6	100160-22 6.8 17.6	100160-22 6.9 18.9	100160-30 7.0 21.0	100160-30 7.5 23.5	100160-30 7.6 26.0	100160-37 7.7 29.5	125200-37 11.0 29.0	125200-37 12.9 33.0			22
65125-11 3.0 7.7	65160-11 4.4 9.2	65160-15 5.0 12.0	80160-15 3.8 13.0	80160-18.5 4.5 15.5	80160-22 5.3 18.7	100160-22 6.8 20.0	100160-30 6.9 22.5	100160-30 7.2 24.5	100160-30 7.3 27.0	100160-37 7.3 31.0	125200-37 10.5 31.0	125200-45 12.6 35.0			24
65160-11 4.0 8.9	65160-11 4.4 9.8	65160-15 5.0 12.6	80160-18.5 3.8 13.7	80160-18.5 4.5 16.4	80160-22 5.3 19.7	100160-30 6.8 21.6	100160-30 6.8 23.5	100160-30 7.1 25.5	100160-37 7.2 28.5	100160-37 7.3 33.0	125200-37 10.0 33.0	125200-45 11.2 37.0			26
65160-11 4.0 9.5	65160-15 4.3 10.5	65160-15 5.0 13.3	80160-18.5 3.8 14.5	80160-22 4.5 17.4	80160-22 5.3 20.5	100160-30 6.5 22.9	100160-30 6.6 24.5	100160-30 6.7 27.0	100160-37 7.0 30.0	125200-37 8.0 32.6	125200-45 9.5 34.2	125200-45 10.5 39.0			28
65160-15 3.8 10.2	65160-15 4.3 11.1	80160-15 3.4 13.2	80160-18.5 3.8 15.4	80160-22 4.5 18.4	100160-30 6.2 21.5	100160-30 6.3 24.0	100160-30 6.5 25.9	100160-37 6.6 28.5	100160-37 6.7 31.7	125200-37 8.0 34.0	125200-45 9.5 36.0	125200-45 10.0 41.0			30
65160-15 3.8 10.8	65160-15 4.2 11.9	80160-18.5 3.4 14.0	80160-18.5 3.8 16.4	80160-22 4.5 19.3	100160-30 5.9 23.1	100160-30 6.1 25.2	100160-30 6.3 27.8	100160-37 6.4 30.0	125200-37 8.5 34.0	100200-45 8.0 41.6	125200-45 8.7 38.0	125200-55 9.2 43.0	125200-75 13.0 56.0		32
65160-15 3.8 11.5	65160-15 4.1 12.6	80160-18.5 3.4 14.9	80160-22 3.8 17.4	80160-22 4.5 19.8	100160-30 5.8 24.5	100160-30 6.0 26.6	100160-37 6.2 28.9	100200-45 6.0 34.9	100200-45 6.9 38.4	100200-55 8.0 43.0	125200-45 8.2 40.0	125200-55 9.0 45.0	125200-75 12.5 58.0		34
65160-15 3.8 12.2	80160-18.5 3.2 13.6	80160-18.5 3.4 15.7	80160-22 3.8 18.2	100160-30 5.5 23.4	100160-30 5.7 25.5	100160-30 5.8 27.6	100200-37 5.2 32.5	100200-45 6.7 36.0	100200-45 6.8 40.3	100200-55 8.0 44.2	125200-55 8.0 42.0	125200-55 8.5 47.0	125200-75 12.0 61.0		36
65200-15 3.2 13.5	80160-18.5 3.2 14.4	80160-18.5 3.4 16.6	65200-30 5.8 25.5	100160-30 5.4 24.6	80200-30 5.8 26.7	100200-37 5.5 30.7	100200-37 5.8 33.8	100200-45 6.6 37.5	100200-55 6.6 41.4	100200-55 7.0 46.1	125200-55 7.7 44.0	125200-55 8.0 49.0	125200-75 11.8 63.0		38
80160-18.5 3.2 14.4	80160-18.5 3.2 15.1	65200-22 4.5 19.5	65200-30 5.8 26.0	80200-30 5.0 24.3	80200-37 5.8 27.8	80200-37 6.2 32.7	100200-45 5.8 35.4	100200-45 6.4 39.2	100200-55 6.5 43.0	100200-55 7.0 47.9	125200-55 7.5 46.0	125200-75 7.5 52.0	125200-75 11.5 66.0		40
65200-18.5 3.2 15.4	65200-18.5 3.5 16.8	65200-30 4.5 21.0	80200-30 4.2 23.5	80200-30 5.0 26.9	80200-37 5.8 30.8	80200-45 6.4 35.6	100200-45 5.8 39.2	100200-55 6.0 43.0	100200-55 6.0 47.2	100200-75 7.0 52.1	125200-75 6.7 51.1	125200-75 7.0 57.0			45
65200-18.5 3.2 16.8	65200-22 3.5 18.7	65200-30 4.5 23.2	80200-30 4.1 25.9	80200-37 4.8 29.7	80200-37 5.0 33.8	80200-45 6.4 39.0	100200-55 5.4 43.1	100200-55 5.7 46.8	100200-75 6.0 51.7	100200-75 7.0 55.1	125200-75 6.2 57.0	125200-75 6.5 63.0			50
65200-22 3.2 18.4	65200-22 3.5 19.8	80200-30 2.6 25.3	80200-37 4.0 28.6	80200-37 4.8 32.6	80200-45 5.4 37.1	100200-55 5.0 43.3	100200-55 5.0 47.4	100200-75 5.5 51.5	100250-75 6.2 63.8	100250-90 6.9 69.6					55
65200-22 3.2 20.0	80200-30 3.0 24.4	80200-37 3.5 28.0	80200-37 4.0 31.4	100200-45 4.0 40	100200-55 4.3 44.2	100250-55 5.1 50.5	100250-75 5.6 56.0	100250-75 5.9 61.6	100250-75 6.1 67.2	100250-90 6.8 74.1					60
65250-30 3.3 23.4	65250-30 3.9 25.7	65250-37 5.5 32.1	80250-45 4.8 35.4	80250-45 5.5 40.8	80250-55 6.7 47.5	100250-75 5.0 54.6	100250-75 5.5 59.8	100250-75 5.8 65.8	100250-90 6.0 71.8	100250-90 6.7 78.8					65
65250-30 3.3 24.9	65250-30 3.8 27.1	65250-37 5.4 33.5	80250-45 4.8 37.6	80250-55 5.5 43.6	80250-55 6.7 50.2	100250-75 4.9 58.4	100250-75 5.4 62.7	100250-90 5.7 69.0	100250-90 5.9 75.6	100250-90 6.6 82.7					70
65250-30 3.2 26.3	65250-37 3.7 28.8	65250-45 5.3 35.5	80250-45 4.7 40.3	80250-55 5.5 46.4	80250-75 6.7 53.4	100250-75 4.7 61.3	100250-75 5.2 66.9	100250-90 5.6 73.3	100250-90 5.8 80.4						75
65250-37 3.2 27.9	65250-37 3.6 30.3	65250-45 5.2 37.6	80250-55 7.1 47.4	80250-55 5.5 49.4	80250-75 6.7 56.6	100250-75 4.5 65.4	100250-90 5.0 71.0								80
65250-37 3.1 29.4	65250-37 3.6 32.0	65250-45 5.1 39.7	80250-55 4.7 48.0	80250-75 5.5 52.3	100250-75 4.2 63.5	100250-90 4.4 69.5									85
65250-37 3.0 31.1	65250-45 3.6 33.9	80250-55 4.0 42.6	80250-55 4.7 48.7												90
65250-37 3.0 32.8	65250-45 3.6 35.8	80250-55 4.0 45.3	80250-75 4.7 51.6												95
80250-45 3.1 39.6	80250-55 3.3 42.9														100
90	100	125	150	175	200	225	250	275	300	325	350	400	500	600	▲ H Head [m]
Capacity [m³/h]															▲ H Head [m]

Values apply to water with $\rho = 1$

NPSH data are measured values, a safety allowance of 0.5 m is necessary.

When ordering, please always quote capacity Q [m³/h] and head H [m].

Selection table

Values at n = 1450 rpm

H Head [m]	Q Capacity [m³/h]															
	4	6	8	10	12	15	20	25	30	35	40	45	50	60	70	80
3	32125-0.37 0.5 0.1	32125-0.37 0.6 0.11	32125-0.37 0.7 0.15	40125-0.37 0.7 0.18	40125-0.37 0.7 0.21	40125-0.37 0.8 0.27	50125-0.37 1.2 0.31	50125-0.55 1.4 0.34	50125-0.55 1.5 0.42	65125-0.75 1.1 0.51	65125-0.75 1.1 0.54	65125-0.75 1.2 0.61				
4	32125-0.37 0.5 0.1	32125-0.37 0.6 0.13	32125-0.37 0.7 0.16	32125-0.37 0.9 0.22	40125-0.37 0.7 0.25	40125-0.37 0.8 0.31	50125-0.55 1.2 0.35	50125-0.55 1.4 0.42	50125-0.75 1.5 0.50	50125-0.75 1.8 0.62	65125-0.75 1.1 0.67	65125-1.1 1.2 0.73	65125-1.1 1.3 0.81	65125-1.5 1.4 0.98	80160-1.5 0.9 1.27	
5	32125-0.37 0.5 0.12	32125-0.37 0.6 0.15	32125-0.37 0.7 0.19	40125-0.37 0.7 0.26	40125-0.37 0.7 0.29	40125-0.55 0.8 0.35	50125-0.55 1.2 0.43	50125-0.75 1.4 0.49	50125-0.75 1.5 0.58	50125-1.1 1.8 0.69	65125-1.1 1.1 0.77	65125-1.1 1.2 0.85	65125-1.1 1.3 0.92	65160-1.5 1.2 1.36	80160-2.2 0.9 1.38	80160-2.2 1.0 1.63
6	32125-0.37 0.5 0.15	32125-0.37 0.6 0.18	40125-0.37 0.6 0.28	40125-0.37 0.7 0.30	40125-0.55 0.7 0.34	40125-0.55 0.8 0.39	50125-0.75 1.2 0.50	50125-0.75 1.4 0.57	65125-1.1 1.1 0.78	65125-1.1 1.1 0.84	65125-1.1 1.1 0.92	65125-1.5 1.2 0.99	65160-1.5 1.1 1.21	80160-1.5 0.9 1.36	80160-2.2 0.9 1.58	80160-2.2 1.0 1.82
7	32160-0.37 0.5 0.17	32160-0.37 0.6 0.27	32160-0.55 0.7 0.32	32160-0.55 1.0 0.40	40160-0.55 0.8 0.42	40160-0.75 1.0 0.51	50160-0.75 1.0 0.66	50160-1.1 1.2 0.77	50160-1.1 1.4 0.89	50160-1.5 1.7 1.06	50160-1.5 2.0 1.27	65160-1.5 1.0 1.23	65160-1.5 1.1 1.35	65160-2.2 1.2 1.7	80160-2.2 0.9 1.77	80160-3 1.0 2.03
8	32160-0.37 0.5 0.27	32160-0.37 0.6 0.30	32160-0.55 0.7 0.35	32160-0.55 1.0 0.43	40160-0.55 0.8 0.47	40160-0.75 1.0 0.56	50160-1.1 1.0 0.75	50160-1.1 1.2 0.85	50160-1.5 1.4 0.98	50160-1.5 1.7 1.14	50160-1.5 2.0 1.34	65160-2.2 1.0 1.37	65160-2.2 1.1 1.5	65160-2.2 1.2 1.67	80160-3 0.9 2.01	80160-3 1.0 2.3
9	30160-0.37 0.5 0.31	30160-0.55 0.6 0.33	30160-0.55 0.7 0.38	40160-0.55 0.8 0.48	40160-0.75 0.8 0.53	50160-1.1 0.9 0.73	50160-1.1 1.0 0.82	50160-1.1 1.2 0.93	50160-1.5 1.4 1.05	50160-1.5 1.7 1.23	65160-2.2 1.0 1.40	65160-2.2 1.0 1.53	65160-2.2 1.1 1.66	80160-3 0.9 1.99	80160-3 0.9 2.30	80160-3 1.0 2.6
10	32160-0.55 0.5 0.34	32200-0.55 0.6 0.47	32200-0.75 0.7 0.54	40200-0.75 0.7 0.59	50160-1.1 1.0 0.76	50160-1.1 0.9 0.8	50160-1.1 1.0 0.91	50160-1.5 1.2 1.03	65160-1.5 0.9 1.3	50200-2.2 1.7 1.59	50200-2.2 1.8 1.90	80160-2.2 0.9 0.92	80160-3 0.9 2.00	80160-3 0.9 2.24	80200-3 1.7 2.89	80200-4 1.8 3.0
11	32200-0.55 0.5 0.40	32200-0.75 0.6 0.50	32200-0.75 0.7 0.59	40200-0.75 0.7 0.64	40200-1.1 0.7 0.72	40200-1.1 0.9 0.89	50200-1.5 1.3 1.03	50200-1.5 1.3 1.21	50200-2.2 1.5 1.43	50200-2.2 1.7 1.68	65200-2.2 1.4 1.80	65200-3 1.6 1.98	65200-3 1.7 2.14	65200-3 2.0 2.57	65200-3 2.3 3.23	80200-4 1.8 3.2
12	32200-0.55 0.5 0.44	32200-0.75 0.6 0.52	32200-0.75 0.7 0.62	30200-1.1 1.0 0.75	40200-1.1 0.7 0.77	40200-1.1 0.9 0.93	50200-1.5 1.3 1.11	50200-1.5 1.3 1.29	50200-2.2 1.5 1.50	50200-2.2 1.7 1.76	65200-2.2 1.4 1.95	65200-3 1.6 2.10	65200-3 1.7 2.30	65200-4 2.0 2.76	65200-4 2.3 3.44	80200-4 1.8 3.5
13	32200-0.75 0.5 0.47	32200-0.75 0.5 0.55	32200-1.1 0.7 0.66	30200-1.1 1.0 0.81	40200-1.1 0.7 0.83	40200-1.5 0.9 0.99	50200-1.5 1.3 1.18	50200-2.2 1.3 1.36	50200-2.2 1.5 1.59	50200-2.2 1.7 1.89	65200-3 1.4 2.08	65200-3 1.6 2.27	65200-3 1.7 2.46	65200-4 2.0 2.95	80200-4 1.7 3.35	80200-5.5 1.8 3.74
14	32200-0.75 0.5 0.51	32200-0.75 0.6 0.59	32200-1.1 0.7 0.71	40200-1.1 0.7 0.78	40200-1.1 0.7 0.88	50200-1.5 1.2 1.10	50200-1.5 1.3 1.27	50200-2.2 1.3 1.45	50200-2.2 1.5 1.68	65200-3 1.3 2.05	65200-3 1.4 2.24	65200-3 1.6 2.43	65200-3 1.7 2.63	65200-4 2.0 3.16	80200-4 1.7 3.60	80200-5.5 1.8 4.0
15	30200-0.75 0.5 0.54	30200-0.75 0.6 0.64	40200-1.1 0.6 0.76	40200-1.1 0.7 0.83	50200-1.5 1.4 1.10	50200-1.5 1.2 1.18	50200-2.2 1.3 1.36	65200-2.2 1.1 1.93	65200-3 1.2 2.04	65200-3 1.3 2.20	65200-3 1.4 2.40	65200-3 1.6 2.60	65200-4 1.7 2.82	80200-4 1.5 3.50	80200-5.5 1.7 3.87	80200-5.5 1.8 4.3
16	32200-0.75 0.5 0.58	32250-1.1 0.4 0.93	50200-1.5 1.2 1.10	50200-1.5 1.2 1.09	50200-1.5 1.4 1.16	65200-2.2 0.9 0.72	65200-2.2 1.0 1.86	65200-3 1.1 2.06	65200-3 1.2 2.18	65200-3 1.3 2.35	50250-4 2.0 3.42	80200-4 1.4 3.27	65250-4 1.3 3.26	65250-5.5 1.7 3.88	65250-5.5 2.3 4.55	80250-5.5 1.8 4.8
17	32250-1.1 0.4 0.84	32250-1.5 0.4 0.97	32250-1.5 0.5 1.11	32250-1.5 0.75 1.28	32250-2.2 1.1 1.34	40250-2.2 0.7 1.72	50250-2.2 1.0 1.85	50250-3 1.2 2.21	50250-3 1.4 2.62	65250-3 1.6 2.61	50250-4 2.0 3.53	65250-4 1.2 3.16	65250-4 1.3 3.43	65250-5.5 1.7 4.00	65250-5.5 2.3 4.73	80250-7.5 3.2 5.57
18	30250-1.1 0.4 0.88	30250-1.5 0.4 1.01	30250-1.5 0.5 1.14	32250-1.5 0.75 1.33	32250-2.2 1.1 1.54	40250-2.2 0.7 1.79	50250-3 1.0 1.94	50250-3 1.2 2.3	50250-3 1.4 2.68	50250-4 1.7 3.12	65250-4 1.1 3.07	65250-4 1.2 3.32	65250-4 1.3 3.60	65250-5.5 1.7 4.2	65250-5.5 2.3 4.90	80250-7.5 3.2 5.8
19	32250-1.1 0.4 0.93	32250-1.5 0.4 1.04	32250-1.5 0.5 1.18	32250-2.2 0.75 1.38	32250-2.2 1.1 1.67	40250-2.2 0.7 1.85	50250-3 1.0 2.02	50250-3 1.2 2.40	50250-4 1.4 2.80	50250-4 1.7 3.20	65250-4 1.1 3.20	65250-4 1.2 3.50	65250-5.5 1.4 3.70	65250-5.5 1.8 4.40	65250-7.5 2.4 5.10	80250-7.5 3.2 6.1
20	32250-1.5 0.4 0.98	32250-1.5 0.4 1.09	32250-1.5 0.5 1.22	32250-2.2 0.75 1.42	32250-2.2 1.1 1.71	40250-2.2 0.7 1.95	50250-3 1.0 2.10	50250-3 1.2 2.50	50250-4 1.4 2.80	50250-4 1.7 3.30	65250-4 1.1 3.40	65250-4 1.2 3.60	65250-5.5 1.4 3.80	65250-5.5 1.8 4.60	65250-7.5 2.4 5.40	80250-7.5 1.5 5.9
22	32250-1.5 0.4 1.08	32250-1.5 0.4 1.18	32250-1.5 0.5 1.34	32250-2.2 0.75 1.56	40250-2.2 0.6 1.75	50250-3 0.9 2.0	50250-3 1.0 2.3	50250-3 1.2 2.6	50250-4 1.4 3.1	50250-4 1.7 3.6	65250-4 1.1 3.6	65250-5.5 1.2 4.0	65250-5.5 1.4 4.3	65250-5.5 1.8 4.9	80250-7.5 1.3 6.0	80250-7.5 1.5 6.6
24	32250-1.5 0.4 1.18	32250-1.5 0.4 1.28	40250-2.2 0.5 1.52	50250-2.2 0.8 1.98	50250-3 0.8 2.07	50250-3 0.9 2.2	50250-3 1.0 2.5	50250-3 1.2 2.8	65250-4 1.0 3.4	50315-5.5 1.3 4.5	65250-5.5 1.1 4.1	65250-5.5 1.2 4.4	65250-5.5 1.4 4.6	80250-7.5 1.2 5.9	80250-7.5 1.3 6.5	65315-11 1.0 9.2
26	40315-2.2 0.9 1.65	40315-2.2 0.9 1.9	40315-3 0.9 2.05	40315-3 1.0 2.25	40315-3 1.1 2.45	40315-4 1.2 2.95	50315-4 1.0 3.4	50315-5.5 1.1 3.75	50315-5.5 1.3 4.8	50315-5.5 1.5 6.35	65315-5.5 0.7 4.9	65315-7.5 1.5 6.35	65315-7.5 0.9 5.9	65315-11 1.1 6.9	65315-11 1.5 8.1	65315-11 1.8 9.6
28	40315-2.2 0.9 1.75	40315-3 0.9 2.10	40315-3 0.9 2.2	40315-3 1.0 2.35	40315-3 1.1 2.6	40315-4 1.2 3.1	50315-4 1.0 3.6	50315-5.5 1.1 3.9	50315-5.5 1.3 5.0	50315-5.5 1.5 6.65	65315-5.5 1.4 5.75	65315-7.5 1.5 6.65	65315-7.5 0.9 6.3	65315-11 1.1 7.3	65315-11 1.5 8.6	80315-11 1.0 9.5
30	40315-2.2 0.9 1.98	40315-3 0.9 2.15	40315-3 0.9 2.35	40315-3 1.0 2.55	40315-4 1.1 2.75	40315-4 1.2 3.25	50315-5.5 1.0 3.8	50315-5.5 1.1 4.15	50315-5.5 1.3 5.3	50315-7.5 1.4 6.0	65315-7.5 0.7 6.3	65315-7.5 0.9 6.7	65315-11 1.1 7.8	65315-11 1.5 9.1	80315-11 1.0 9.5	
32	40315-3 0.9 2.14	40315-3 0.9 2.35	40315-3 0.9 2.5	40315-4 1.0 2.75	40315-4 1.1 2.95	40315-4 1.2 3.45	50315-5.5 1.0 4.0	50315-5.5 1.1 4.35	50315-5.5 1.3 5.5	50315-7.5 1.4 6.3	65315-7.5 0.8 6.6	65315-11 0.9 7.2	65315-11 1.1 8.2	65315-11 1.5 9.7	80315-15 1.0 10.0	
34	40315-3 0.9 2.2	40315-3 0.9 2.5	40315-4 0.9 2.7	40315-4 1.0 2.9	40315-4 1.1 3.15	40315-5.5 1.2 3.65	50315-5.5 1.0 4.25	50315-5.5 1.1 4.65	50315-7.5 1.1 5.1	50315-7.5 1.3 5.8	65315-7.5 0.7 6.6	65315-11 0.8 7.1	65315-11 0.9 7.8	65315-11 1.1 8.8	80315-15 0.9 9.5	80315-15 1.0 10.5
36	40315-3 0.9 2.4	40315-3 0.9 2.65	40315-4 0.9 2.85	40315-4 1.0 3.05	40315-4 1.1 3.3	50315-5.5 0.9 4.1	50315-5.5 1.0 4.5	50315-5.5 1.1 4.85	50315-7.5 1.1 5.4	65315-7.5 0.6 6.5	65315-11 0.7 7.0	65315-11 0.8 7.5	65315-11 0.9 8.0	80315-11 0.8 9.2	80315-15 0.9 10.1	100315-15 1.0 11.5
38	40315-3 0.9 2.55	40315-4 0.9 2.8	40315-4 0.9 3.0		65315-7.5 0.4 5.2	65315-7.5 0.4 5.3	65315-7.5 0.4 5.7	65315-7.5 0.5 6.1	65315-7.5 0.5 6.5	80400-11 0.6 7.5	80400-11 0.6 8.0	80400-11 0.7 8.7	80400-11 0.7 9.2	80400-15 0.8 10.7	80400-15 0.9 12.3	80400-18.5 1.1 14.0
40									80400-11 0.6 7.6	80400-11 0.6 8.1	80400-11 0.6 8.5	80400-11 0.7 9.3	80400-11 0.7 9.7	80400-15 0.8 11.2	80400-15 0.9 12.9	80400-18.5 1.1 14.6
45									80400-11 0.6 8.8	80400-11 0.6 9.3	80400-11 0.6 9.8	80400-15 0.7 10.4	80400-15 0.7 11.1	80400-15 0.8 12.6	80400-18.5 0.9 14.3	80400-18.5 1.1 16.1
50									80400-15 0.6 10	80400-15 0.6 10.4	80400-15 0.6 11.1	80400-15 0.7 11.8	80400-15 0.7 12.5	80400-18.5 0.8 14.1	80400-18.5 0.9 15.8	80400-22 1.1 17.8
55									80400-15 0.6 11.2	80400-15 0.6 11.9	80400-15 0.6 12.5	80400-15 1.7 13.2	80400-18.5 0.7 14.0	80400-18.5 0.8 15.7	80400-22 0.9 17.5	80400-22 1.1 19.2
60									80400-15 0.6 12.6	80400-15 0.6 13.3	80400-18.5 0.6 14.2	80400-18.5 0.7 14.7	80400-18.5 0.7 15.7	80400-22 0.8 17.4	80400-22 0.9 19.3	100400-30 0.9 23.0
H Head [m]	Q Capacity [m³/h]															
	4	6	8	10	12	15	20	25	30	35	40	45	50	60	70	80

Example:
Required: capacity Q = 70 m³/h
head H = 20 m


In the Table the following is found:
Size NOW 65250
Motor rating 7.5 kW
NPSH 2.4 m
Power demand of pump 5.4 kW

Capacity [m³/h]															H Head [m]
100	125	150	175	200	225	250	275	300	350	400	450	500	600	700	
		100160-2.2 2.9 1.95	100160-3 3.8 2.5	100160-4 4.5 3.0											3
	100160-2.2 2.3 1.95	100160-3 2.8 2.4	100160-4 3.4 2.85	100160-4 3.9 3.6	125200-5.5 5.2 4.0	125200-5.5 6.4 4.7									4
100160-2.2 1.9 1.9	100160-3 2.2 2.3	100160-3 2.7 2.7	100160-4 3.0 3.3	100160-5.5 3.5 4.1	125200-5.5 4.6 4.5	125200-7.5 5.6 5.3	125200-7.5 6.5 6.3		150200-11 2.7 7.0			200250-11 3.6 9.9	200250-15 4.0 12.2		5
80160-3 1.2 2.6	100160-3 2.1 2.6	100160-3 2.3 3.1	100160-5.5 2.7 3.9	125200-5.5 3.4 4.6	125200-7.5 3.8 5.2	125200-7.5 4.7 5.8	125200-7.5 5.4 6.8	150200-7.5 2.2 6.5	150200-11 2.7 8.0	150200-11 3.8 9.6	200250-15 3.5 10.2	200250-15 3.6 11.2	200250-15 4.0 13.3		6
100160-3 1.8 2.5	100160-4 1.9 2.9	100160-4 2.2 3.6	125200-5.5 2.7 4.5	125200-7.5 2.9 5.1	125200-7.5 3.3 5.7	125200-7.5 3.9 6.4	125200-11 4.5 7.3	150200-11 2.2 7.4	150200-11 2.7 9.25	150200-15 3.8 10.5	200250-15 3.5 11.5	200250-15 3.6 12.6	200250-18.5 4.0 15.0		7
80200-4 2.3 3.2	100160-4 1.8 3.4	100160-5.5 2.0 4.0	100200-7.5 2.2 5.9	125200-7.5 2.6 5.6	125200-7.5 2.9 6.2	125200-11 3.4 6.9	125200-11 3.9 8.2	150200-11 2.2 8.25	150200-11 2.7 9.75	150200-15 3.8 11.5	200250-15 3.5 12.7	200250-18.5 3.6 13.9	200250-18.5 4.0 16.5	200250-22 4.8 19.8	8
80200-4 2.3 3.45	80200-5.5 3.2 4.5	100200-7.5 2.3 5.07	100200-7.5 2.5 6.1	125200-7.5 2.5 6.0	125200-7.5 2.6 6.8	125200-11 3.0 7.6	125200-11 3.6 8.7	150200-11 2.2 9.0	150200-15 2.7 10.5	150200-15 3.8 12.3	200250-18.5 3.5 14.0	200250-18.5 3.6 15.5	200250-22 4.0 18.2	200250-30 4.8 21.8	9
80200-5.5 2.3 3.7	80200-5.5 3.2 4.87	100200-7.5 2.1 5.5	100200-7.5 2.4 6.6	125200-7.5 2.1 6.4	125200-11 2.4 7.4	125200-11 2.8 8.2	150200-11 2.2 9.1	150200-11 2.2 9.75	150200-15 2.7 11.4	150250-18.5 4.7 16.0	150250-22 5.5 18.0	200250-18.5 3.6 16.8	200250-22 4.0 19.8	200250-30 4.8 23.8	10
80200-5.5 2.3 4.0	100200-5.5 1.8 4.8	100200-7.5 2.0 5.8	100200-11 2.3 7.0	125200-11 2.0 7.0	125200-11 2.3 7.8	150200-11 2.0 9.3	150200-15 2.2 10.2	150200-15 2.2 10.8	150200-15 2.7 12.2	150250-22 4.5 16.5	150250-22 5.2 19.0	200250-22 3.6 18.2	200250-30 4.0 21.4	200250-30 4.8 25.6	11
80200-5.5 2.3 4.3	100200-7.5 1.7 5.1	100200-7.5 1.9 6.1	100200-11 2.3 7.4	125200-11 1.9 7.5	150200-11 2.0 9.7	150200-15 2.0 10.5	150200-15 2.2 10.8	150200-15 2.2 11.7	150250-18.5 3.6 14.7	150250-22 5.0 17.5	150250-30 5.0 21.8	200250-22 3.6 19.7	200250-30 4.0 23.6	200250-30 4.8 27.5	12
80200-5.5 2.3 4.5	100200-7.5 1.7 5.5	100200-7.5 1.9 6.5	125200-11 1.5 7.4	150200-11 2.0 9.5	150200-15 2.0 10.3	150200-15 2.0 11.1	150250-15 3.0 14.5	150250-15 3.0 15.7	150250-18.5 3.3 16.5	150250-22 4.0 18.3	150250-30 4.9 22.0	200250-30 3.6 21.2	200250-30 4.0 24.7		13
100200-7.5 1.5 5.0	100200-7.5 1.7 5.9	100250-11 2.4 8.2	125250-11 1.5 8.4	125250-11 1.7 9.4	125250-15 1.9 10.7	125250-15 2.1 12.3	125250-15 2.4 13.7	125250-18.5 2.7 15.8	150250-18.5 3.1 16.9	150250-22 3.9 20.0	150250-30 4.7 23.0	200250-30 3.6 22.7	200250-30 4.0 26.3		14
100200-7.5 1.5 5.45	80250-11 2.3 8.2	100250-11 2.4 8.6	125250-11 1.5 8.9	125250-15 1.7 10.0	125250-15 1.9 11.3	125250-15 2.1 12.9	125250-18.5 2.9 16.4	125250-18.5 3.0 17.5	150250-22 3.6 21.5	150250-30 4.5 24.0		200250-30 3.6 24.3			15
80250-7.5 1.8 6.2	80250-11 2.3 8.5	100250-11 2.4 9.1	125250-11 2.0 9.4	125250-15 2.3 10.5	125250-15 2.6 11.8	125250-15 2.8 13.4	125250-18.5 2.8 15.2	125250-22 2.7 17.1	150250-22 2.9 19.0	150250-30 3.5 22.0					16
80250-7.5 1.8 6.5	80250-11 2.3 8.8	100250-11 2.4 9.5	100250-15 1.9 11.3	125250-15 2.2 11.1	125250-15 2.3 12.5	125250-18.5 2.4 14.0	125250-18.5 2.6 15.9	150250-22 2.5 17.5	150250-22 2.8 20.0	150250-30 3.3 22.8					17
80250-7.5 1.8 6.7	100250-11 1.8 8.2	125250-11 1.7 9.6	100250-15 1.8 11.9	125250-14 2.1 11.8	125250-15 2.1 13.1	125250-18.5 2.2 14.7	125250-18.5 2.4 16.6	150250-22 2.4 18.1	150250-30 2.8 20.8	150250-30 3.2 23.8					18
80250-11 1.8 7.1	100250-11 1.8 8.6	100250-15 2.1 10.2	100250-15 2.5 12.4	125250-15 2.0 12.4	125250-18.5 2.1 13.7	125250-18.5 2.1 15.3	150250-22 2.3 17.6	150250-22 2.4 18.9	150250-30 2.6 21.8						19
80250-11 1.8 7.4	100250-11 1.8 8.9	100250-15 2.1 10.7	100250-15 2.5 12.9	125250-15 1.9 13.1	125250-18.5 1.9 14.4	125250-18.5 2.1 16.1	150250-22 2.2 18.3	150250-22 2.3 19.5	150250-30 2.5 22.7						20
100250-11 1.5 8.4	100250-11 1.8 9.9	100250-15 2.1 11.5	125250-15 1.6 13.1	125250-18.5 1.7 14.4	125315-22 1.8 17.3	125315-22 2.0 19.8	150250-30 2.1 20.3	150315-30 2.5 22.5	150315-30 2.6 26.7	150315-37 2.8 30.9					22
100250-11 1.5 9.3	100250-15 1.8 10.8	125315-15 1.5 13.5	125315-18.5 1.5 14.4	125315-18.5 1.7 16.4	125315-22 1.8 18.5	125315-30 2.0 21.0	150315-30 2.4 22.4	150315-30 2.5 24.3	150315-37 2.6 28.4	150315-37 2.8 32.9	150315-45 2.8 39.2				24
80315-15 1.3 10.5	80315-15 1.7 13.5	100315-18.5 1.5 14.7	125315-18.5 1.5 15.3	125315-22 1.8 17.3	125315-22 1.8 19.6	125315-30 2.0 22.1	150315-30 2.4 24.1	150315-30 2.5 26.1	150315-37 2.6 30.3	150315-45 2.8 34.9	150315-55 2.8 41.7				26
80315-15 1.3 10.9	100315-15 1.6 12.9	100315-18.5 1.7 15.4	125315-22 1.5 16.3	125315-22 1.7 18.0	125315-30 1.8 20.7	125315-30 2.0 23.3	150315-30 2.4 25.9	150315-37 2.5 27.9	150315-37 2.6 32.2	150315-45 2.8 37.1	150315-55 2.8 43.9				28
80315-15 1.3 11.5	100315-15 1.6 13.5	100315-18.5 1.7 16.2	125315-22 1.5 17.4	125315-22 1.7 19.4	125315-30 1.8 21.8	125315-30 2.0 24.5	150315-37 2.4 27.6	150315-37 2.5 29.7	150315-45 2.6 34.2	150315-45 2.8 39.3	150315-55 2.8 45.0				30
80315-15 1.3 11.9	100315-18.5 1.6 14.3	100315-22 1.7 17.2	125315-22 1.5 18.6	125315-30 1.7 20.6	125315-30 1.8 23.0	125315-30 2.0 25.8	150315-37 2.4 29.4	150315-37 2.5 31.7	150315-45 2.6 36.3	150315-55 2.8 41.5	150400-75 2.9 54.9				32
100315-15 1.2 12.5	100315-18.5 1.6 15.0	125315-22 1.4 17.9	125315-22 1.5 19.8	125315-30 1.7 21.9	125315-30 1.8 24.4	125400-37 2.2 31.3	150315-37 2.4 31.4	125400-45 2.8 40.1	150315-45 2.6 38.4	150400-55 2.5 47.8	150400-75 2.9 56.2				34
100315-15 1.2 13.3	100400-22 1.2 19.3	100400-30 1.4 23.0	125315-22 1.5 21.0	125315-30 1.7 23.3	125400-37 1.9 29.0	125400-37 2.2 32.8	150315-37 2.4 33.1	150315-45 2.5 35.7	150400-55 2.2 43.2	150400-75 2.5 49.9	150400-75 2.9 58.5				36
100400-18.5 1.0 16.4	100400-30 1.2 19.9	100400-30 1.4 24.0	125400-30 1.5 23.8	125400-30 1.7 26.9	125400-37 1.9 30.5	125400-45 2.2 34.4	125400-45 2.4 38.7	150400-45 2.0 39.1	150400-55 2.2 45.2	150400-75 2.5 52.2	150400-75 2.9 60.7				38
80400-22 1.3 18.6	100400-30 1.2 20.6	100400-30 1.4 24.9	125400-30 1.5 25.0	125400-37 1.7 28.3	125400-37 1.9 32.0	125400-45 2.2 35.9	150400-45 1.9 38.9	125400-55 2.8 45.7	150400-55 2.2 47.4	150400-75 2.5 54.5	150400-75 2.9 63.1				40
100400-22 1.0 18.9	100400-30 1.2 22.5	100400-30 1.4 27.0	100400-37 1.6 32.3	125400-37 1.7 31.9	125400-45 1.9 35.7	125400-45 2.2 40.0	125400-55 2.4 44.8	150400-55 2.0 45.9	150400-75 2.2 52.9	150400-75 2.5 60.9	150400-90 2.9 63.3				45
80400-30 1.3 21.8	100400-30 1.2 24.7	100400-37 1.4 29.2	125400-37 1.5 31.8	125400-45 1.7 35.6	125400-47 1.9 39.6	125400-55 2.2 44.1	125400-55 2.4 49.4	150400-75 2.0 51.0	150400-75 2.2 58.5	150400-75 2.5 67.0					50
100400-30 1.0 23.0	100400-30 1.2 27.0	125400-37 1.2 32.0	125400-45 1.5 35.4	125400-45 1.7 39.9	125400-55 1.9 43.7	150400-55 1.8 49.3	150400-75 1.8 54.0	150400-75 2.0 56.5							55
															60
100	125	150	175	200	225	250	275	300	350	400	450	500	600	700	H Head [m]
Capacity [m³/h]															H Head [m]


Values apply to water with $\rho = 1$

NPSH data are measured values, a safety allowance of 0.5 m is necessary.

When ordering please always quote capacity Q [m³/h] and head H [m].

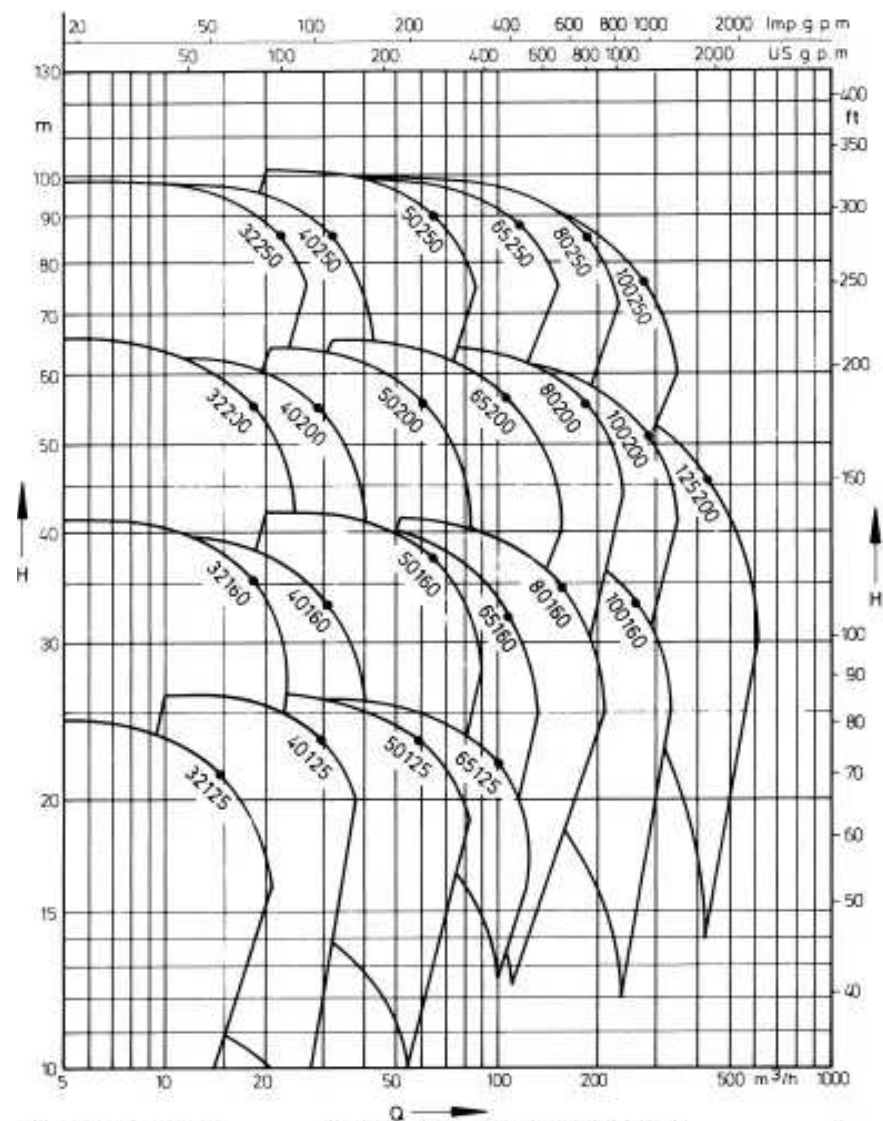





$n =$

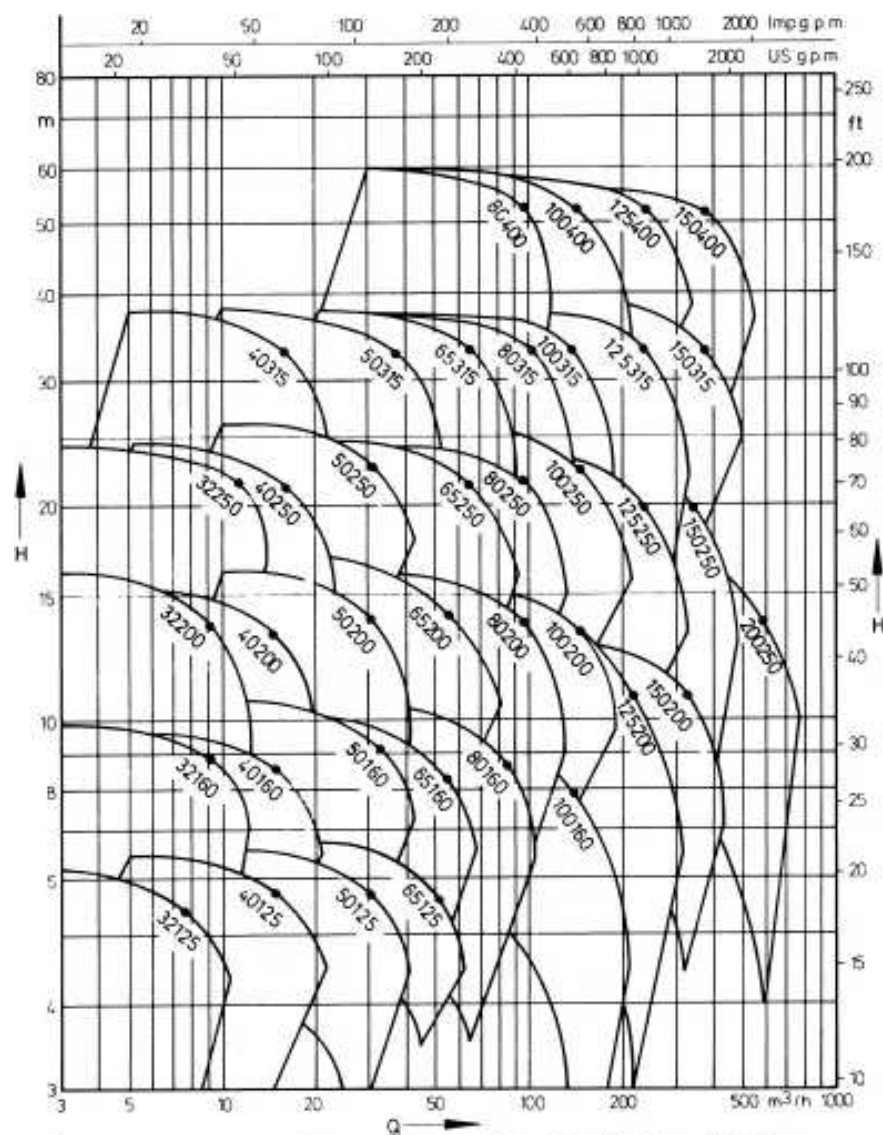

$n = 1450 \text{ 1/min}$





Performance curves

n = 2900 rpm

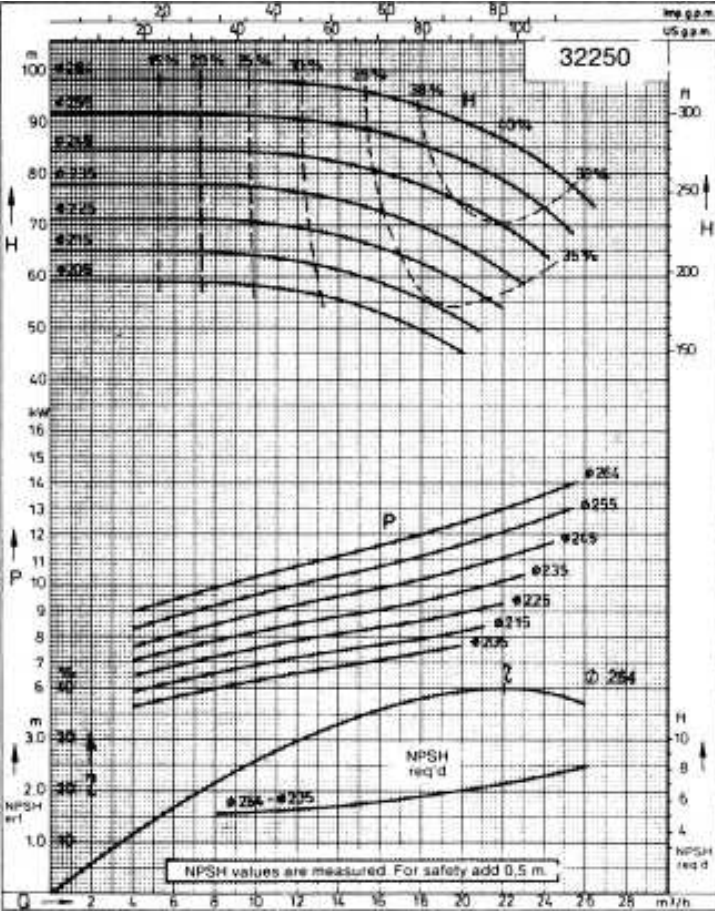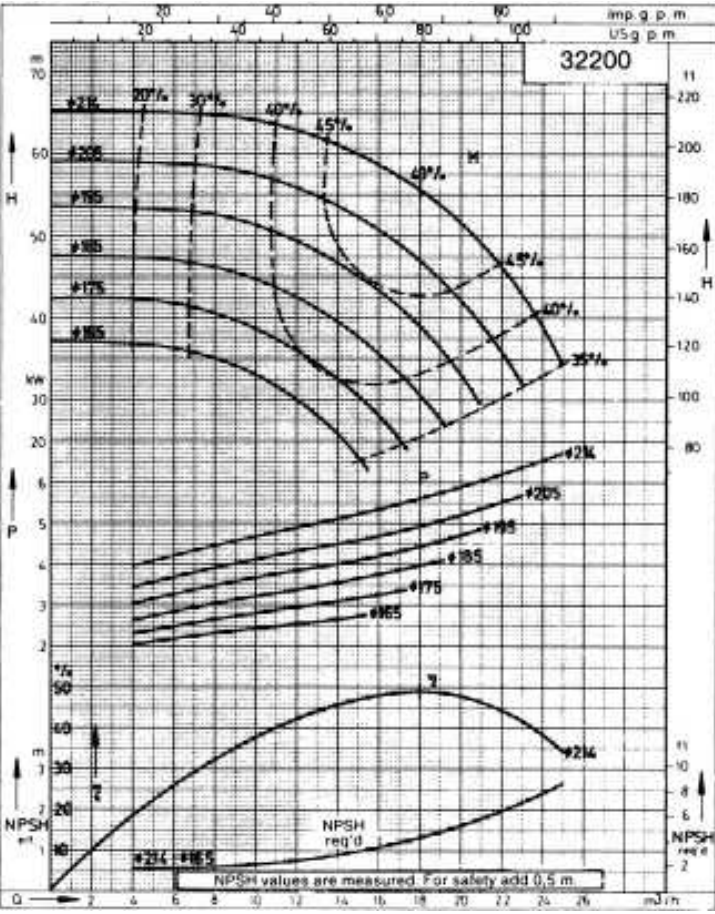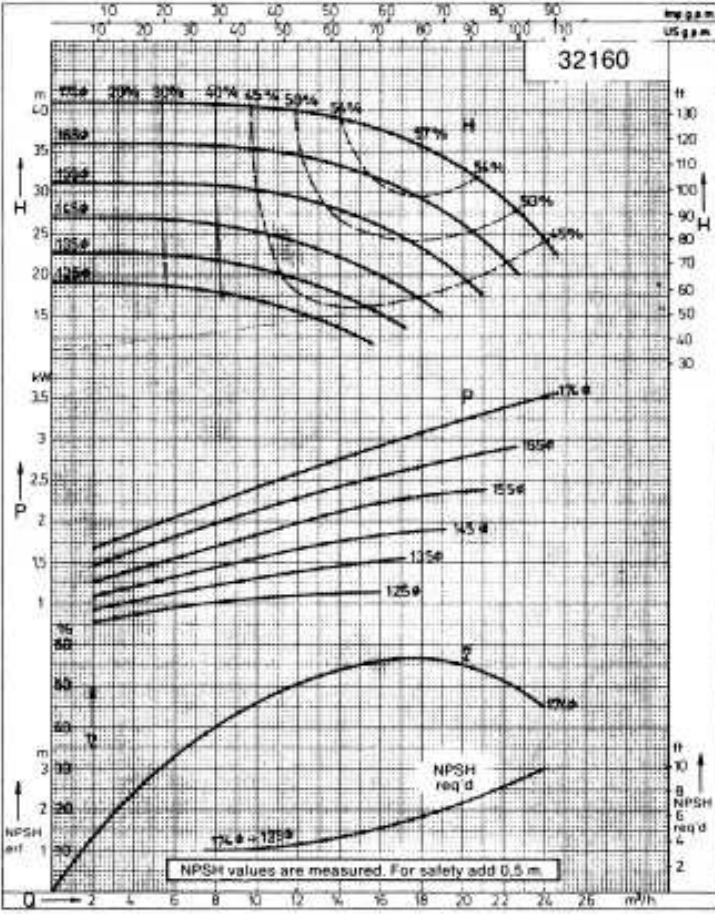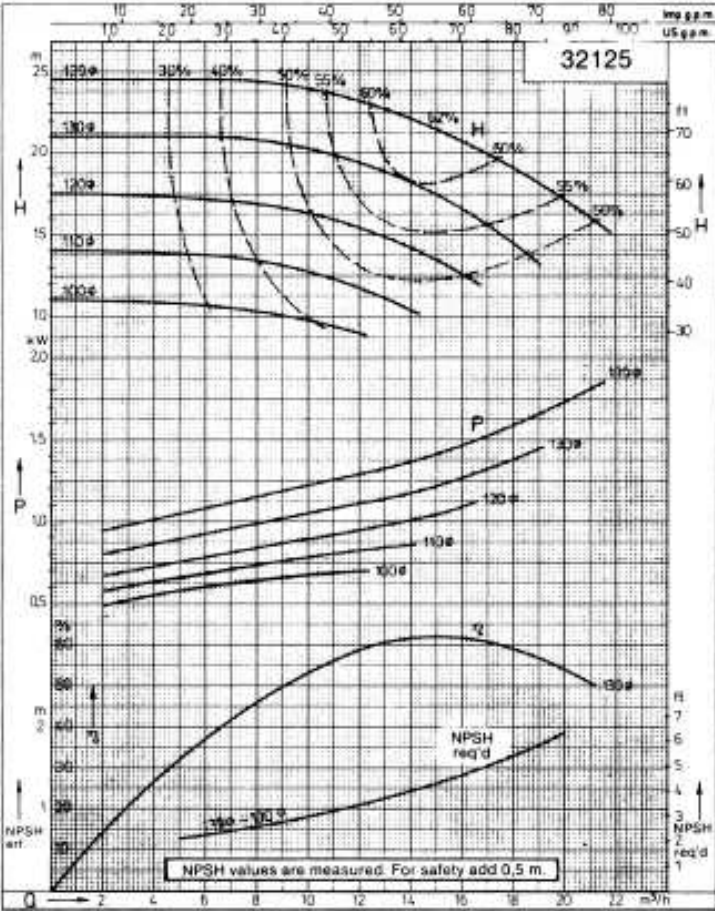

Performance curves

$n = 2900$ rpm

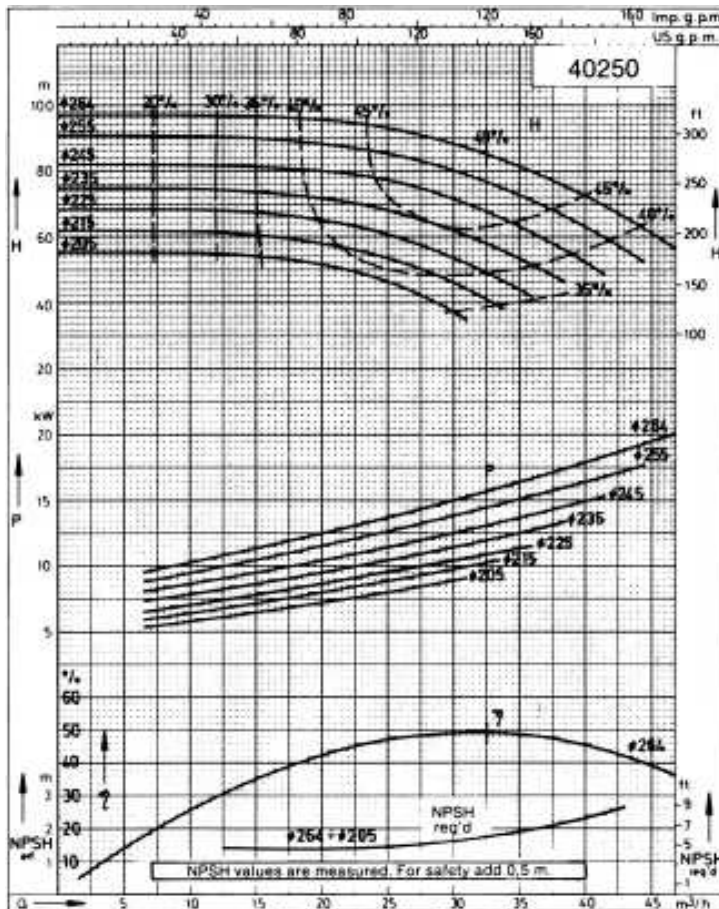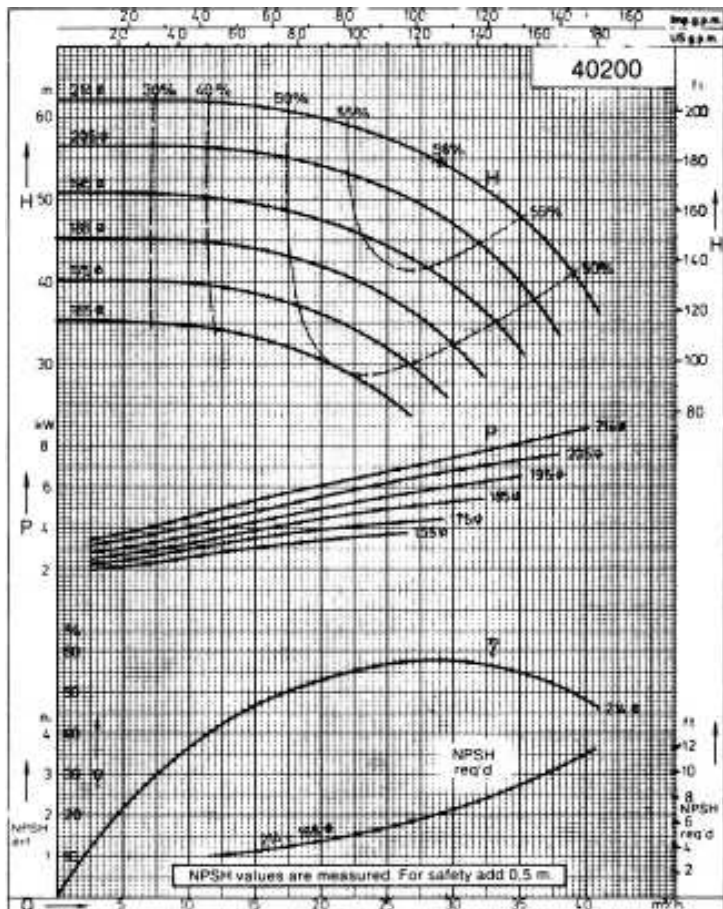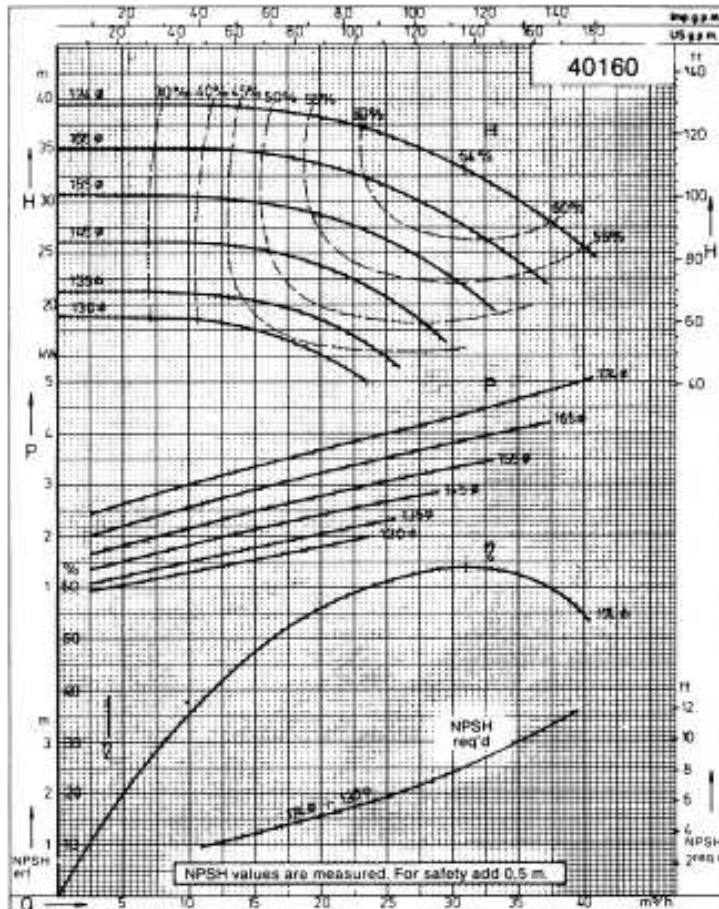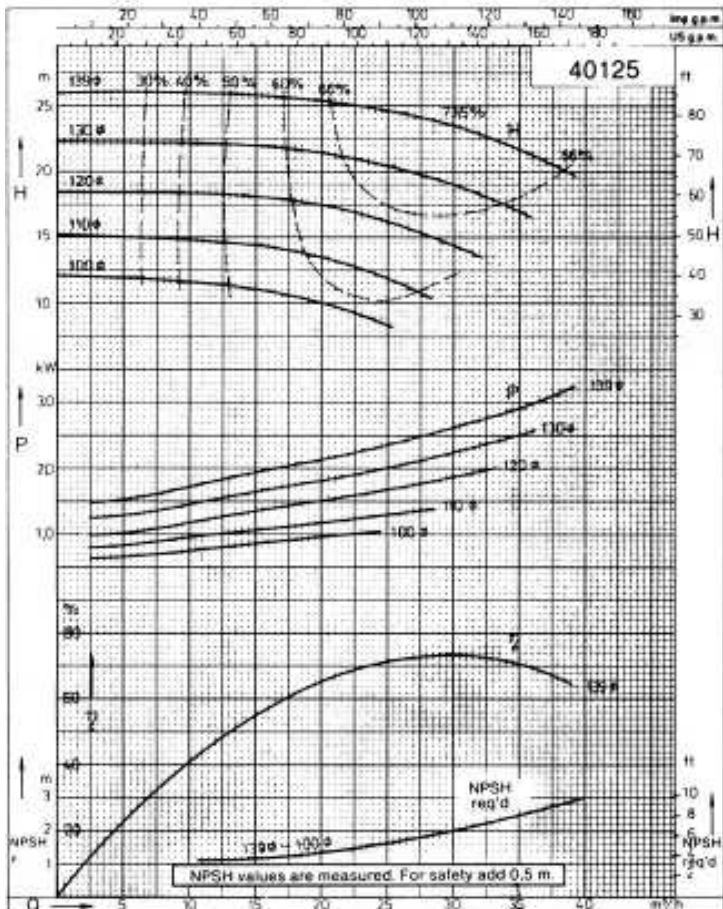

NOW