

100200

Head (H) in m: 8 to 16
Head (H) in ft: 25 to 50

Power (P) in kW: 2 to 7



Flow rate (Q) in l/s: 0 to 200

Efficiency curves: 21%, 40%, 50%, 60%, 65%, 70%, 75%, 80%, 85%, 90%

Performance curves for flow rates: 21.5 l/s, 40 l/s, 60 l/s, 80 l/s, 100 l/s, 120 l/s, 140 l/s, 160 l/s, 180 l/s, 205 l/s

NPSH req'd curves: 15.5 l/s, 21.5 l/s





Note: NPSH values are measured. For safety add 0.5 m.

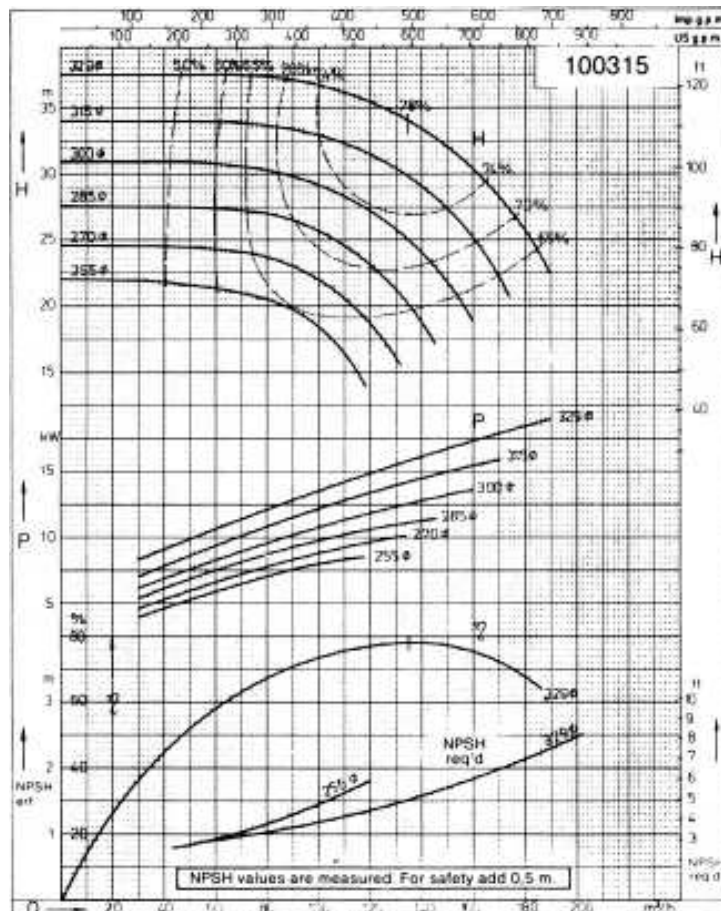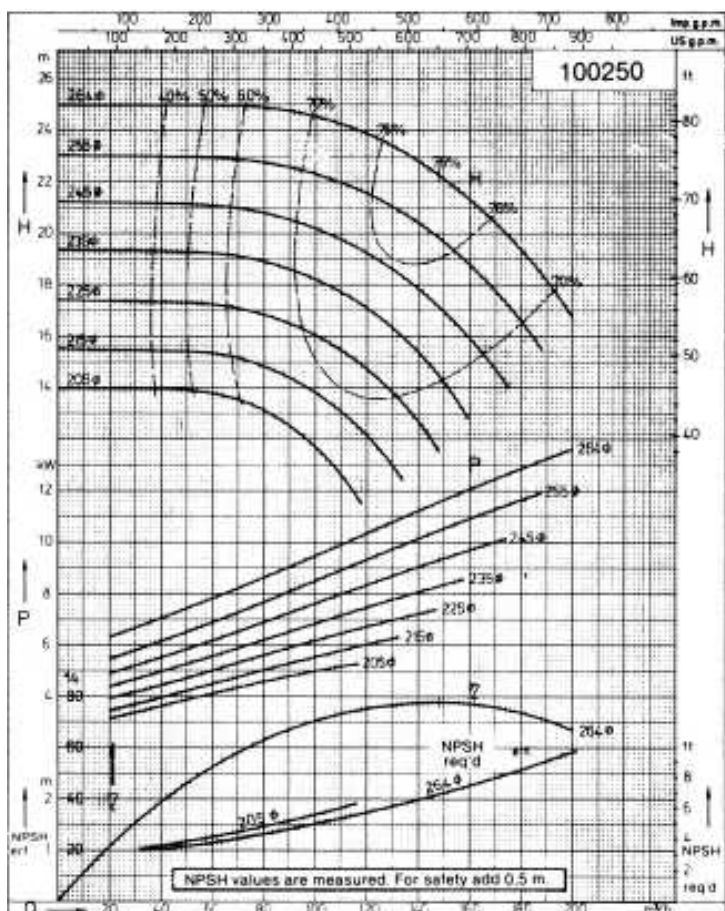

NOW

Performance curves





$n = 1450 \text{ rpm}$

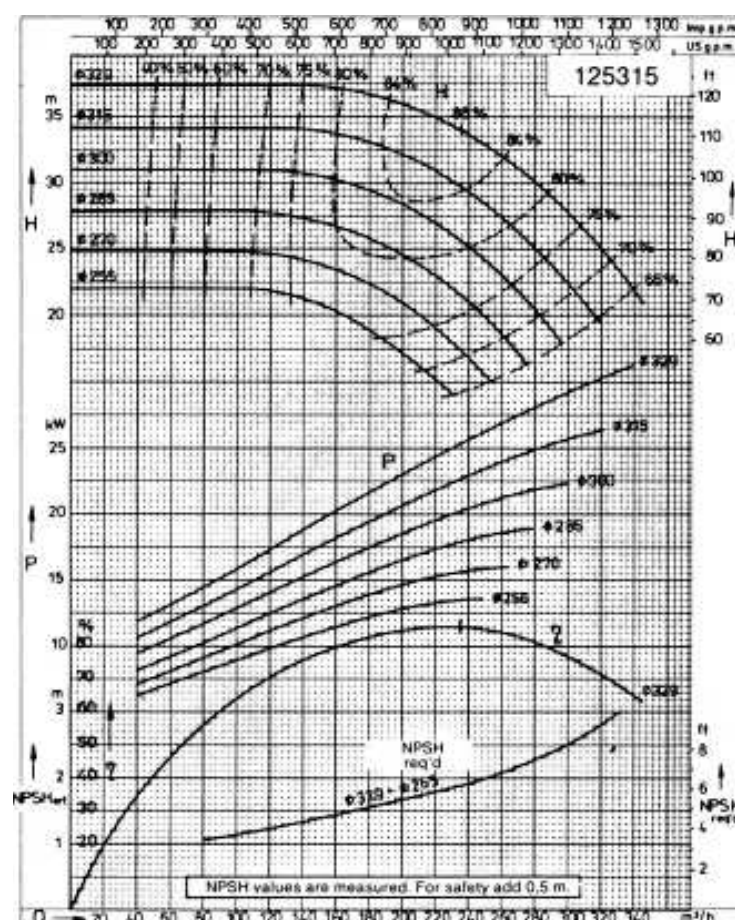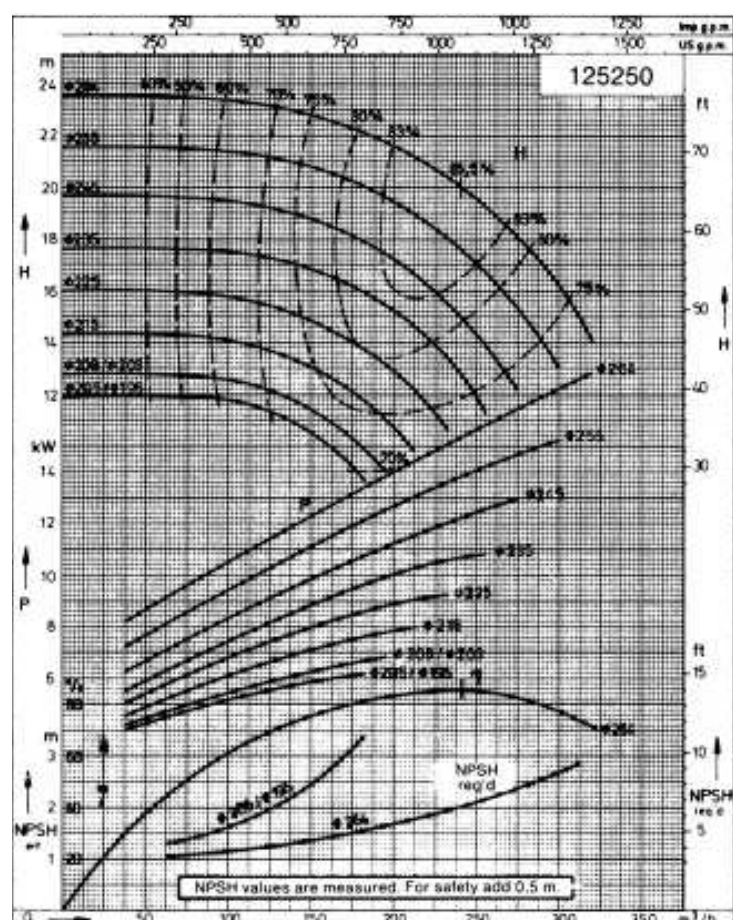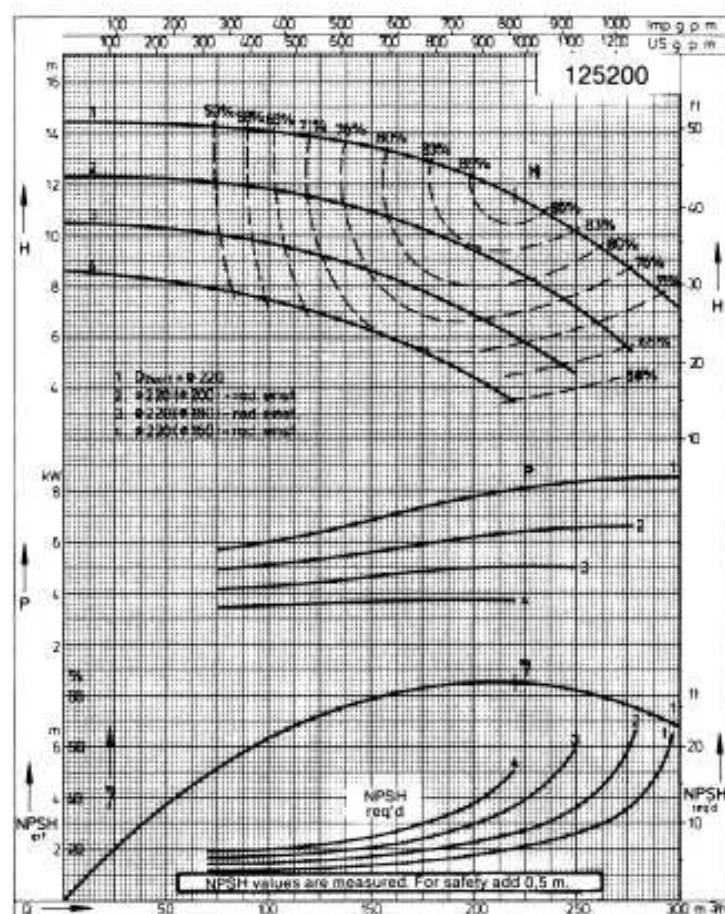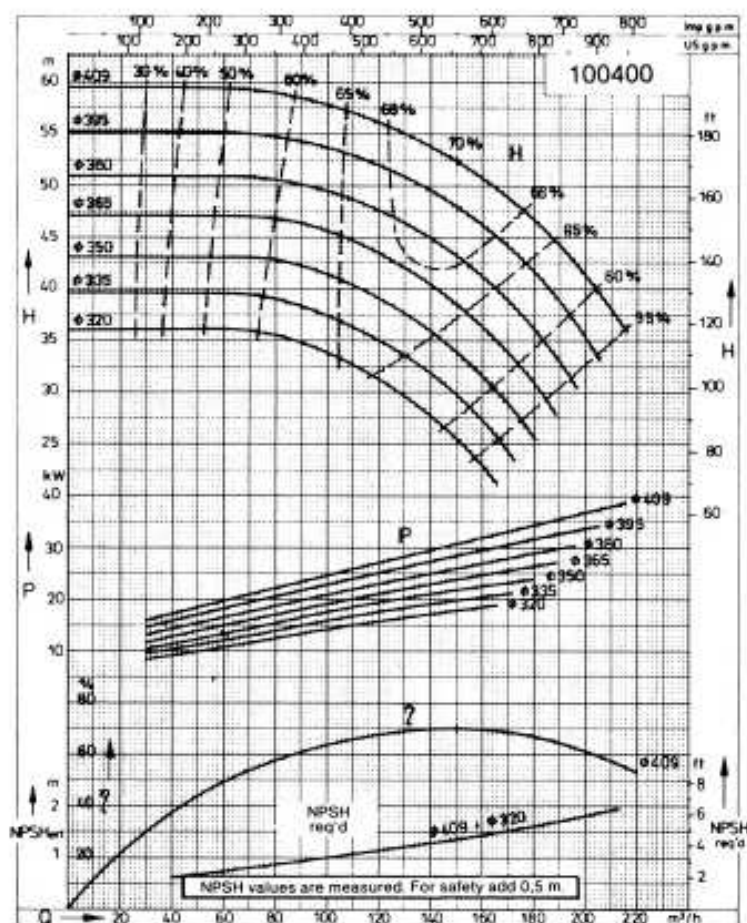

NOW


Performance curves

n = 1450 rpm

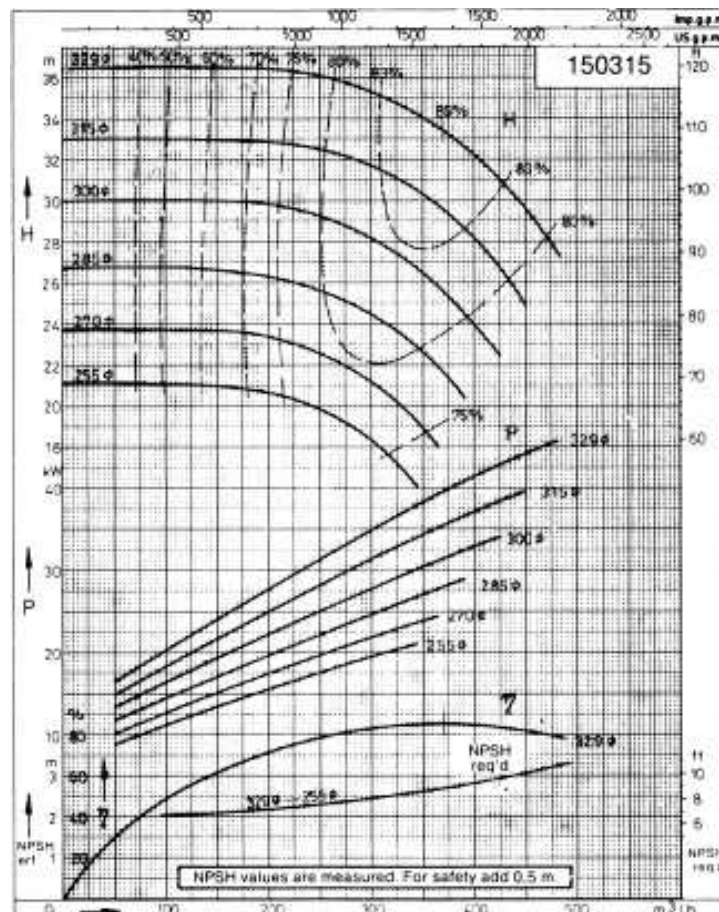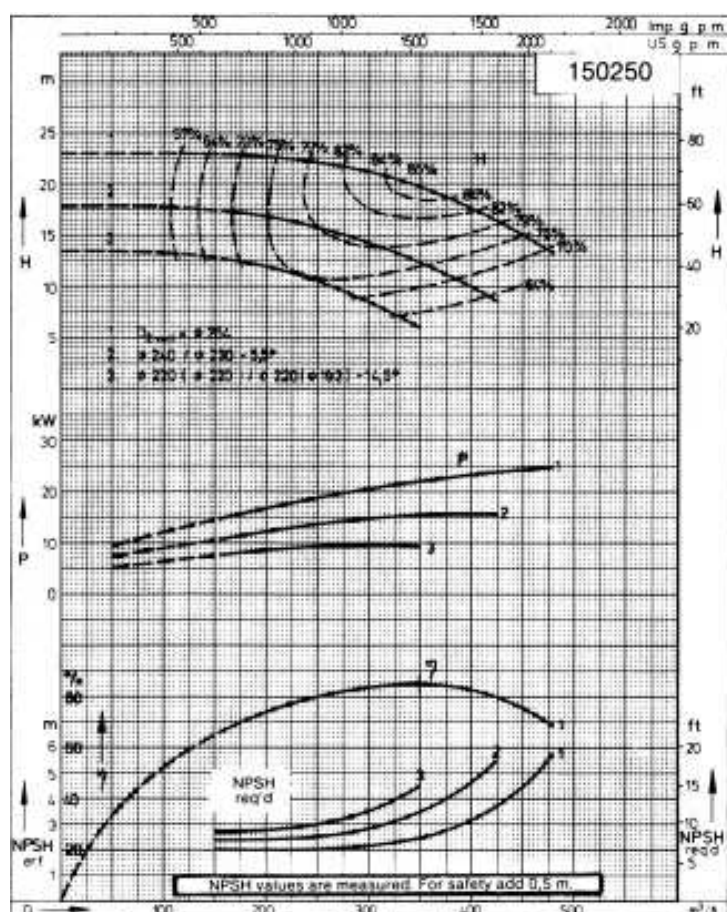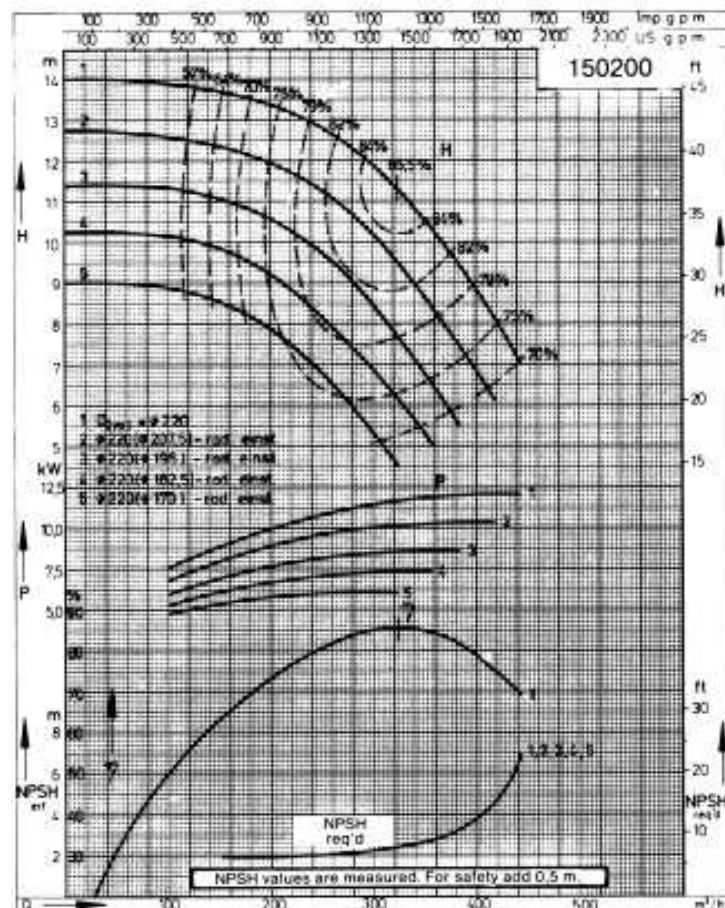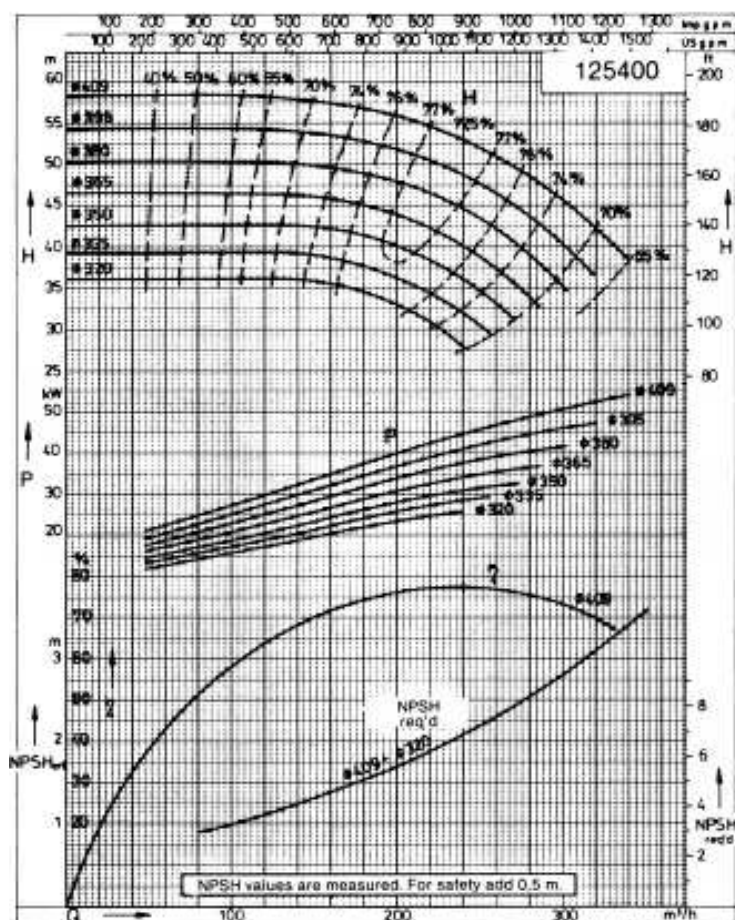

Performance curves

$n = 1450 \text{ rpm}$

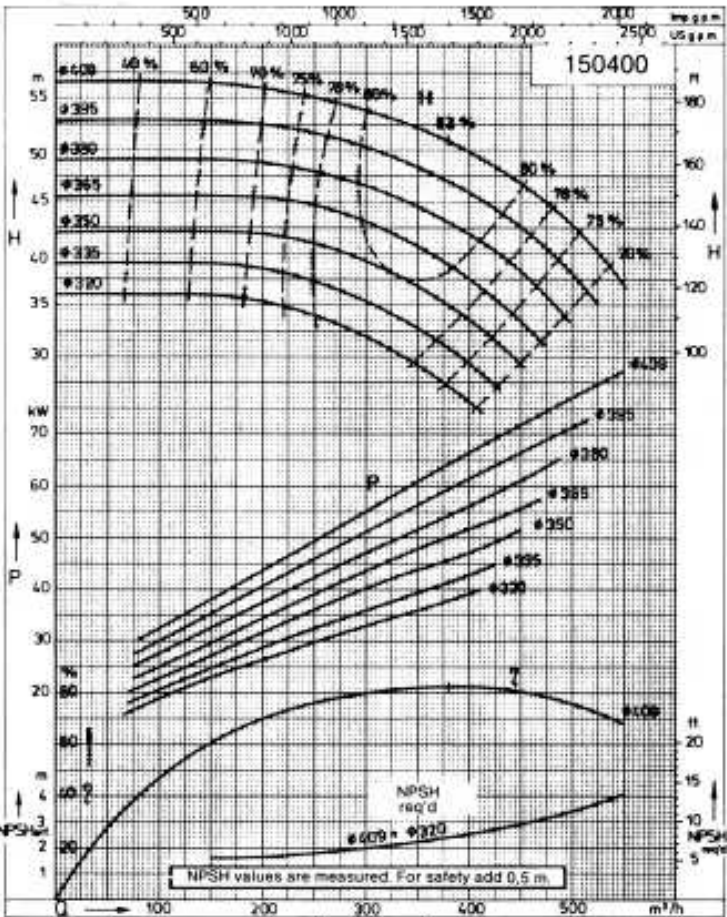



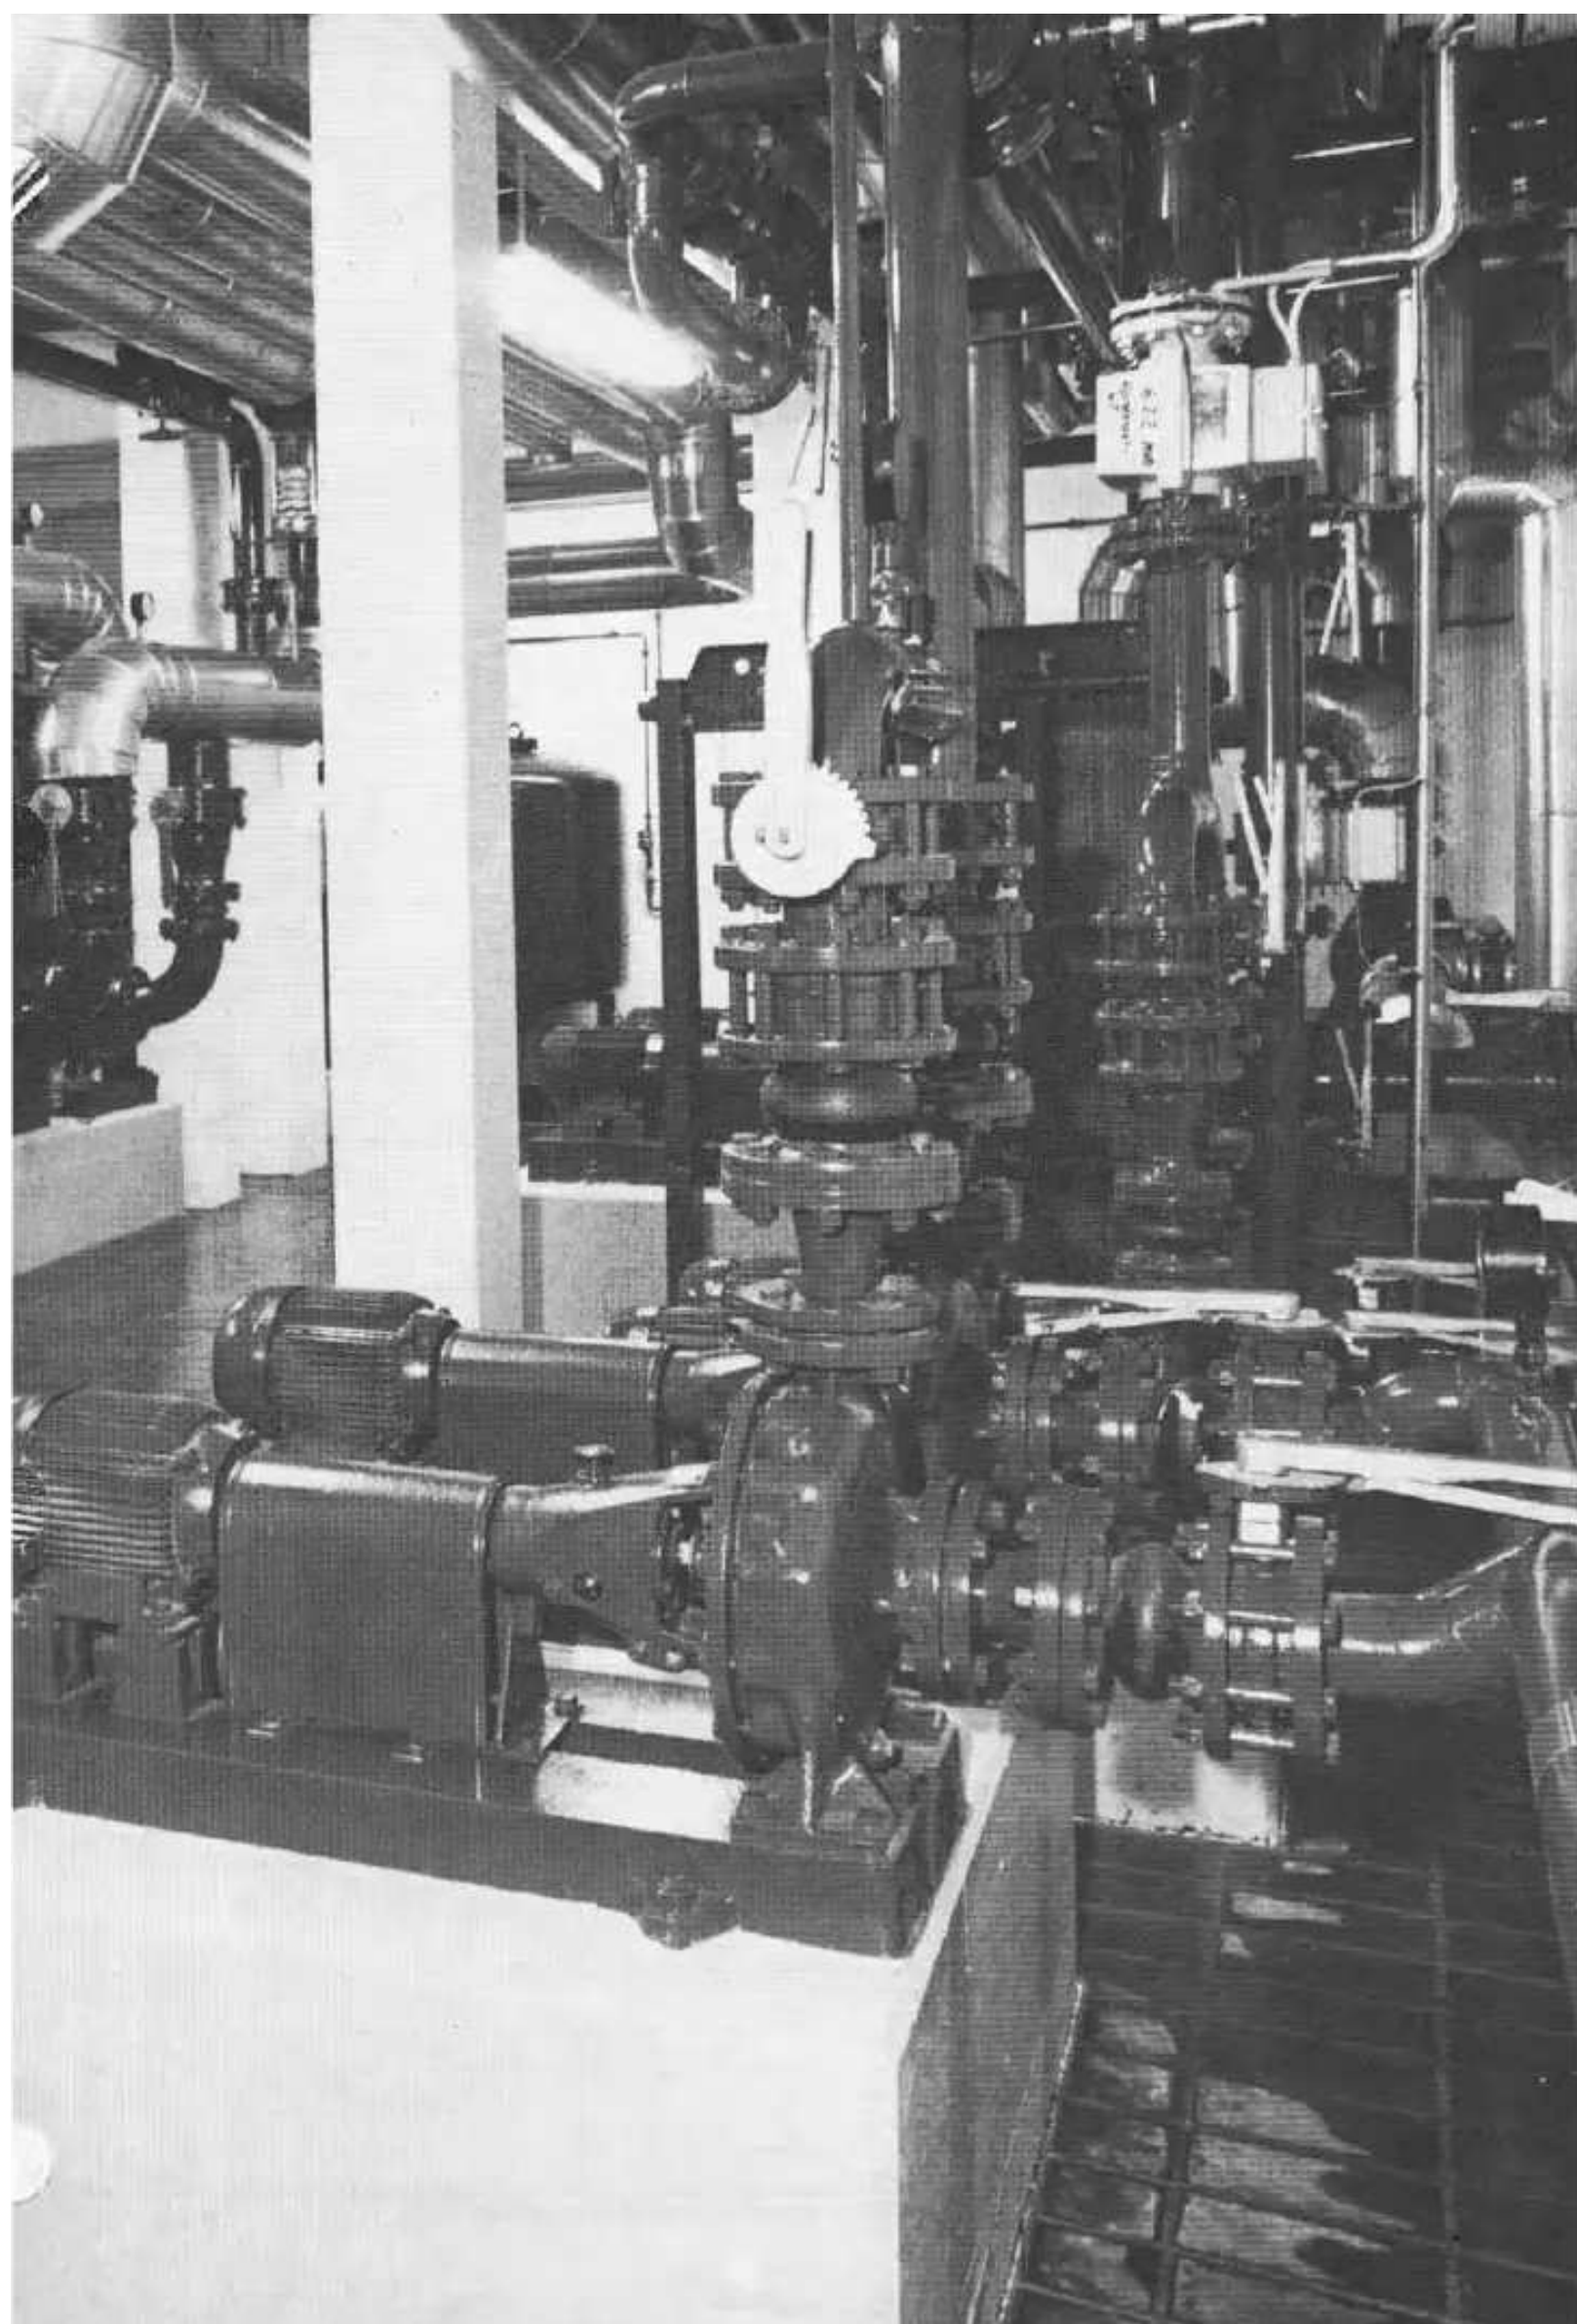


Table of dimensions

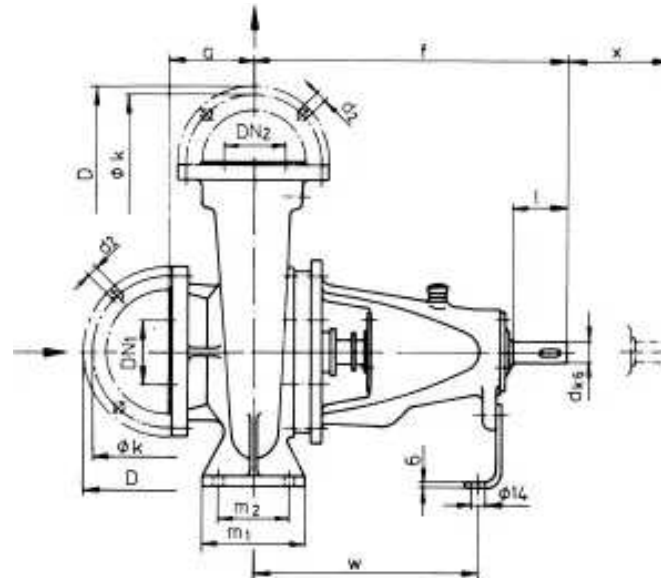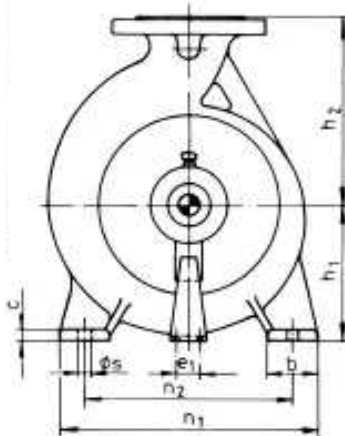

Dimensions in mm, permissible dimensional deviations and tolerances to VDMA 24275

Pump size	Bearing housing	DN ₂	DN ₁	a	f	h ₁	h ₂	b	c	e ₁	m ₁	m ₂	n ₁	n ₂	s	w	d	l	t	u	x						
32125	25	32	50	80	360	112	140	50	14	100	100	70	190	140	14	267	24	50	27	8	140						
32160						132	160			240			190														
32200						160	180			320			250														
32250 ¹⁾		100	180	225		65	110	125		95	320	250															
40125		40	65	80		112	140	210		160																	
40160						132	160	240		190																	
40200						160	180	265		212																	
40250						180	225	320		250																	
40315 ¹⁾						125	470	200		250	65	110	125	95								345	280	342	32	80	35
50125	25	50	100	360	132	160	50	100		100	70	240	190	14	267	24	50	27	8								
50160					160	200		265				212															
50200					180	225		320				250															
50250					200	250		345				280															
50315 ¹⁾	35	125	470	225	280	65	80	16		125	95	280	212	18	342	32	80	35	10								
65125	160	180	260	212																							
65160	180	225	320	250																							
65200	200	250	360	280																							
65250	35	65	80	100	470	225	280	80		16	160	120	360	280	18	342	32	80	35	10							
65315						250	280	400	315	400	315																
80160 ³⁾	25	80	100	125	360	180	225	65	14	110	125	95	320	250	14	267	24	50	27	8							
80200 ³⁾	250				345	280																					
80250 ³⁾	35				470	200	280	400	315				18	370							42	110	45	12			
80315 ³⁾	250				315	360	280	342	32																80	35	10
80400 ¹⁾²⁾⁴⁾	45	530	280	355	80	18	160	120	435		355	370			42	110	45	12									
100160 ¹⁾⁴⁾	35	100	125	150	500	200	280	80	16		200	150			500	400	22	370	42	110					45	12	
100200 ³⁾					470	225	315						360	280							342	32	80	35			10
100250 ³⁾					250	315	400						315														
100315 ³⁾					280	355	435						355														
100400 ²⁾⁴⁾	45	125	150	140	530	280	355	100	18		200	150	500	400	22	370	42	110	45	12							
125200 ¹⁾⁴⁾	35	125	150	140	470	250	315	80	16		110	160	120	400	315	18	342	32	80	35	10						
125250 ³⁾					355	400	450	400	315					370	42							110	45	12			
125315 ²⁾⁴⁾					280	355	435	355																			
125400 ²⁾⁴⁾					315	400	450	400																			
150200 ¹⁾⁴⁾	35	150	200	160	470	280	375	100	18			200	150	500	400	22	342	32	80	35	10						
150250 ¹⁾²⁾⁴⁾					315	400	450							400	315							370	42	110	45	12	
150315 ²⁾⁴⁾					280	375	435							355													
150400 ²⁾⁴⁾					315	400	450							400													
200250 ¹⁾²⁾⁴⁾	45	200	250	160	580	280	400	100	22	200		150	500	400	22	420	42	110	45	12							

¹⁾ Additional sizes (not contained in DIN 24255)

²⁾ These sizes do not conform to the illustration in all details


³⁾⁴⁾ For dimension "D" see flange connection dimensions

Flange mating dimensions to DIN 2501									
PN 10									
DN ₂ / DN ₁	32	40	50	65	80	100	125	150	200
D	140	150	165	191	200	235 ²⁾ 229 ⁴⁾	270 ²⁾ 254 ⁴⁾	300 ²⁾ 285 ⁴⁾	343 ⁴⁾
k	100	110	125	145	160	180	210	240	295
d ₂ x number	18 x 4	18 x 4	18 x 4	18 x 4	18 x 8	18 x 8	18 x 8	22 x 8	22 x 8


The outside diameters and thickness of the flanges in some cases differ from DIN 2532 PN 10 (permissible in accordance with VDMA 24297).

Connections

For all shaft seal versions

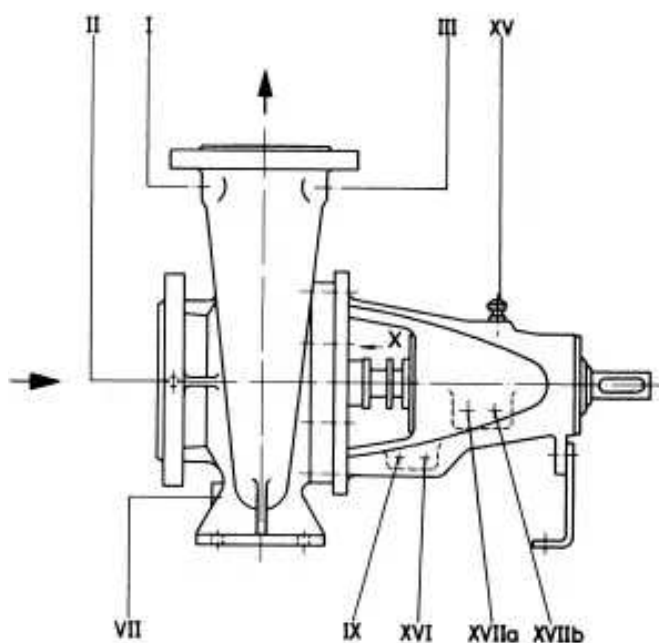

Additional for shaft seal versions
051 or 052
(View X)

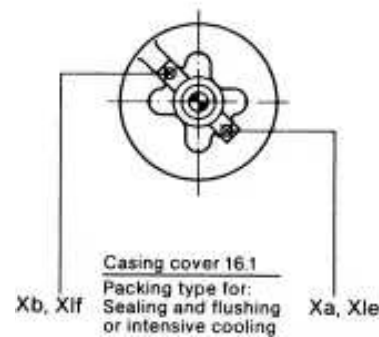


Code	Connections	for version with	Position of connections as seen from drive	Dimensions	
I	Pressure gauge connection		on discharge branch, suction side	G 1/4	G 1/2 for 125200–150200 100250–150250 80315–150315 80400–150400 200250
II	Pressure/vacuum gauge connection		on suction branch flange, right	G 1/4	
III	Vent		on discharge branch, drive side	G 1/4	G 3/8 for 150250 125315–150315 80400–150400 200250
VII	Drain		on bottom of volute casing, suction side	G 3/8	G 1/4 for 32125– 50125 32160– 50160 32200– 50200
IX	Drip and leakage connection		on bearing housing, right	G 1/2	G 3/8 for 32125– 65125 32200– 65200
Xa	Inlet connection for sealing liquid	external sealing	on the casing cover, bottom right hand side ¹⁾	G 1/4	G 1/8 for 32125– 65125 32160– 80160 32200– 65200 32250– 50250
Xb	Outlet connection for sealing liquid	external sealing	on the casing cover, top left hand side ²⁾	G 1/4	
Xle	Connection for intensive cooling – inlet	Intensive cooling of shaft seal	on the casing cover, bottom right hand side ¹⁾	G 1/4	–
Xlf	Connection for intensive cooling – outlet	Intensive cooling of shaft seal	on the casing cover, top left hand side ²⁾	G 1/4	
XV	Oil filling		on top of bearing housing, centre	∅ 20 mm	–
XVI	Oil drain		on bearing housing, right	G 1/4	–
XVIIa	Oil level check		on bearing housing, right	G 1/2	–
XVIIb	Constant level oiler	Oil lubrication	on bearing housing, right	G 1/4	–

¹⁾ On the sizes fitted to bearing housing 45 "bottom left hand side"

²⁾ On the sizes fitted to bearing housing 45 "top right hand side"

Bedplate drawing for units with standard coupling

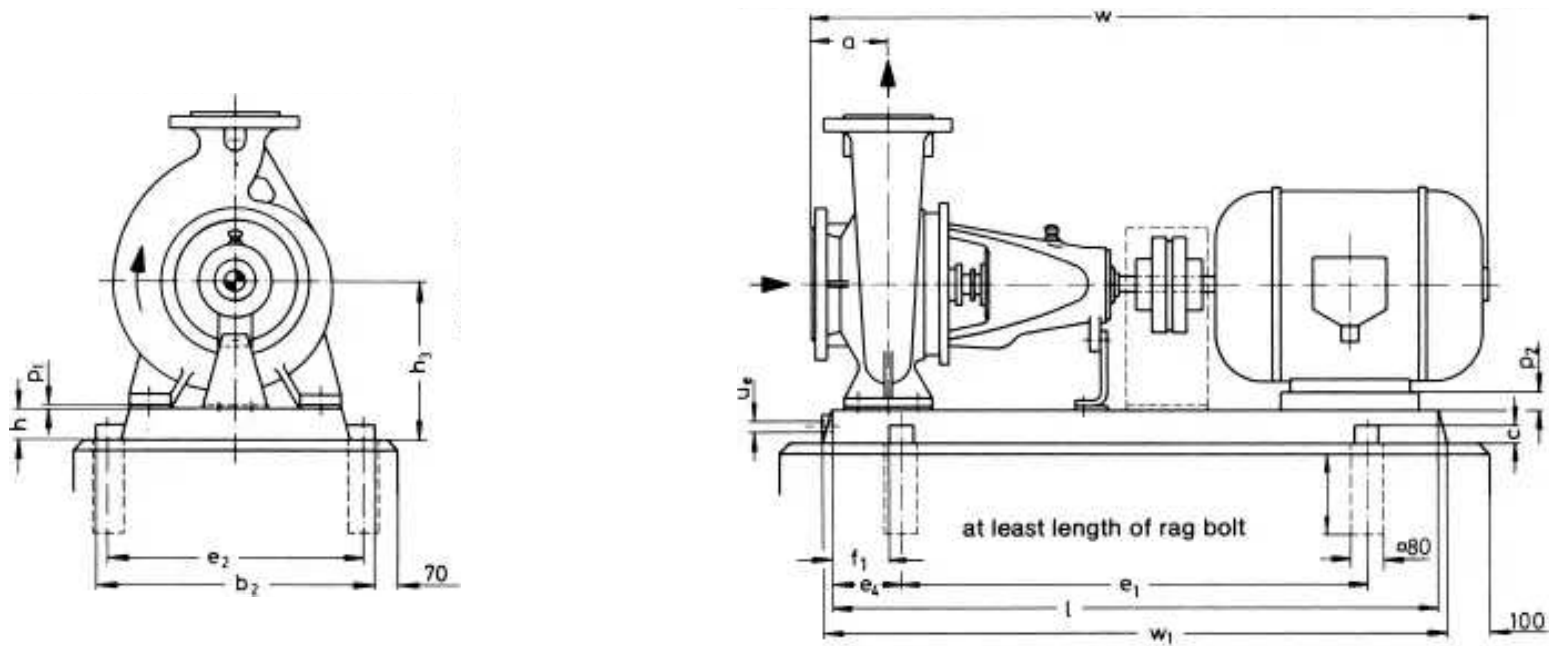

Dimensions in mm; general tolerances (bedplates) for cast parts to
DIN 1686/GBT 17, for welded parts to DIN 8570 B

n = 2900 rpm

Size	Motor Size	Motor kW	Bedplate No.	Coupling N · B	Weight Pump kg	Weight Compl. unit kg	a	b ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u _s	Rag bolt DIN 529
32125	80	0,75	241	68	28	61	80	330	25	480	290	115	60	65	177	710	20	32	734	730	G 1/2	M 16 x 160
	80	1,1																22	734			
	90 S	1,5																42	764			
	90 L	2,2																32	784			
32160	90 S	1,5	272	80	34	72	80	360	25	540	320	130	60	65	197	800	20	42	764	820	G 1/2	M 16 x 160
	90 L	2,2																32	784			
	100 L	3																20	834			
	112 M	4																60	854			
32200	100 L	3	272	80	41	94	80	360	25	540	320	130	60	65	225	800	20	48	834	820	G 1/2	M 16 x 160
	112 M	4																48	854			
	132 S	5,5																28	924			
	132 S	7,5																48	944			
32250	132 S	5,5	342	95	59	158	100	450	30	660	400	170	75	80	260	1000	20	48	944	1020	G 1/2	M 20 x 250
	132 S	7,5																20	944			
	160 M	11																20	1074			
	160 M	15																20	1074			
40125	80	1,1	241	68	29	65	80	330	25	480	290	115	60	65	177	710	20	32	734	730	G 1/2	M 16 x 160
	80 S	1,5																22	764			
	90 L	2,2																12	784			
	100 L	3																—	834			
40160	100 L	3	272	80	36	91	80	360	25	540	320	130	60	65	197	800	20	32	834	820	G 1/2	M 16 x 160
	112 M	4																20	854			
	132 S	5,5																—	944			
	132 S	7,5																28	944			
40200	132 S	5,5	344	95	44	130	80	450	30	660	400	170	75	80	240	1000	20	—	944	1020	G 1/2	M 20 x 250
	132 S	7,5																—	944			
	160 M	11																20	1074			
	160 M	15																20	1074			
40250	160 M	11	344	95	61	219	80	450	30	660	400	170	75	80	240	1000	20	—	944	1020	G 1/2	M 20 x 250
	160 M	15																20	1074			
	160 L	18,5																20	1074			
	180 M	22																—	1164			
50125	90 L	2,2	241	68	32	73	100	330	25	480	290	115	60	65	197	710	20	42	804	730	G 1/2	M 16 x 160
	100 L	3																32	854			
	112 M	4																20	874			
	132 S	5,5																—	944			
50160	132 S	5,5	272	80	38	123	100	360	25	540	320	130	60	65	225	800	20	28	944	820	G 1/2	M 16 x 160
	132 S	7,5																—	944			
	160 M	11																20	1074			
	160 M	15																20	1074			
50200	160 M	11	344	95	48	204	100	450	30	660	400	170	75	80	240	1000	20	—	944	1020	G 1/2	M 20 x 250
	160 M	15																20	1074			
	160 L	18,5																20	1074			
	200 L	30																—	1164			
50250	160 M	15	344	95	63	231	100	450	30	660	400	170	75	80	240	1000	20	—	944	1020	G 1/2	M 20 x 250
	160 L	18,5																20	1074			
	180 M	22																—	1164			
	200 L	37																—	1254			



Bedplate drawing
for units with standard coupling

n = 2900 rpm

Size	Motor		Bedplate No.	Coupling N-B	Weight		a	b ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u _g	Rag bolt DIN 529																														
	Size	kW			Pump kg	Compl. unit kg																																														
65125	132 S	5.5	303	95	39	131	100	390	25	600	350	150	75	65	225	900	-	28	944	920	G 1/2	M 16 x 160																														
	132 S	7.5	138			944																																														
160 M	11	197	1074		1020	M 20 x 250																																														
65160	132 S	7.5	303		43	142													450			30	660	400	170	65	225	900	-	28	944	920	1074	1020	M 16 x 160																	
	160 M	11	201			1074																																														
160 M	15	211	1074		1020	M 20 x 250																																														
65200	160 M	15	344	52				220	490	40	740	440		190	110	310	1120	20		-	1074										-					1124	1164	1254														
	160 L	18.5						240													1254																															
180 M	22	315	80	260				1000													290																		1120	20	-	1274	1364	1364	1404	1514						
200 L	30	370																	1254																																	
65250	180 M	22																	S 385			110	81	344	409	429	531	610	940	690		230	90	110	310												1250	25	-	1274	1364	1364
	200 L	30			531	1274																																														
	200 L	37			531	1274			1364	1364	1404	1514																																								
	225 M	45			531	1274	1364		1364	1404	1514																																									
250 M	55	698	140	740	940	690	230	100	350	1400	50	-	1514	-	-	-	-	-	M 24 x 400																																	
80160	160 M	11	344	95	53	211	125	450	30	660	400	170	75	80	260	1000	-	20	1100	1020	G 1/2	M 20 x 250																														
	160 M	15				221													1100																																	
160 L	18.5	241	1150	110	290	1120		20	-	1150	1190	1280																																								
180 M	22	316	1280																																																	
200 L	30	371	490		40	740		440	190	290	1120	20		-	1260	1300	1390	1390	1430																																	
80200	160 L	18.5													95					70	298		610	840	550	205	100	325	1250	45	-	1390	1390	1430	1540	1660																
	180 M	22	333		1430																																															
200 L	30	398	125		91	418		490	40	740	440	190		110	310	1120	20	-	1390	1390	1430		1540	1660																												
200 L	37	418				1430																																														
225 M	45	520	140		740	940		690	230	100	350	1400		50	-	1540	1660																																			
80250	200 L	30	S 386		125	91		419	140	490	40	740		440	190	90		110	310	1120	20		-	1390	1390	1430	1540	1660																								
	200 L	37						439									1430																																			
225 M	45	541	140		740	940		690		230	100	350		1400	50		80	-	1540	1660																																
250 M	55	708					1540																																													
280 S	75	906	160		740	940	690	230		100	380	1400	80	-	1660		1660																																			
100160	160 L	18.5	S 385	110	72	300	140	490		40	740	440	190	90	110			310	1120	20	-	1222	1244	1359	1359																											
	180 M	22				322											1244																																			
200 L	30	417	1359	490	40	740		440		190	110	310	1120		20		-	1300	1390	1390	1430	1540	1660																													
200 L	37	427	1359																																																	
100200	160 M	22	S 385	110	85	348		140		490	40	740	440		190		90	110	310	1120	20	-	1300	1390	1390	1430	1540	1660																								
	200 L	30				413																	1390																													
200 L	37	433	610	740	940	690				230	100	325	1250		25			-	1430	1540	1660																															
225 M	45	535																	1430																																	
100250	250 M	55	S 607	140	103	702			140	610	40	940	690		230	90		100	380	1400	55	-	1444	1554	1674	1704	1784																									
	250 M	75				792																	1540																													
280 S	90	973	160	740	940	690				230	100	325	1250		25			-	1444	1554	1674	1704	1784																													
315 S	110	1176																	1540																																	
125200	250 M	55	S 607	140	95	677				140	740	40	1060		690			270	90	100	380	1400	30	-	1539	1612	1663																									
	280 S	75				858	1612																																													
280 M	90	903	160	740	940	690	230				100	380	1400	30	-			1539		1612	1663																															

* Dimensions for motor with enclosure IP 54, make of motor to our choice

Bedplate drawing for units with standard coupling

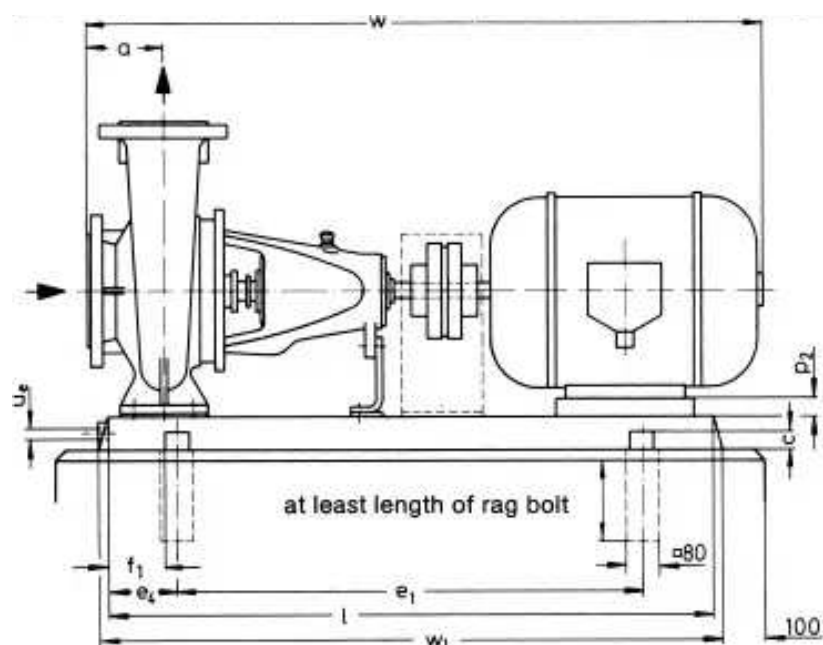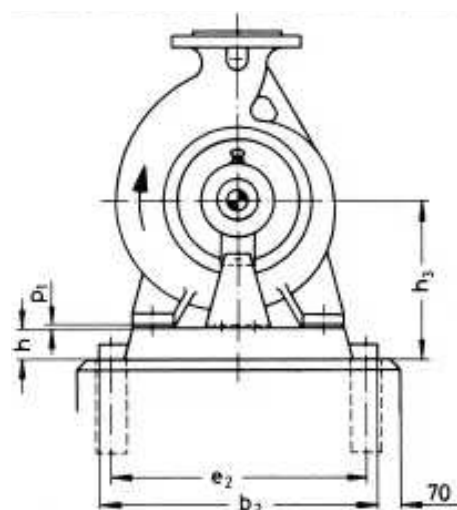

$n = 1450 \text{ rpm}$

Dimensions in mm; general tolerances (bedplates) for cast parts to DIN 1686/GB 17, for welded parts to DIN 8570 B

Size	Motor Size	Motor kW	Bedplate No.	Coupling N-B	Weight Pump kg	Weight Compl. unit kg	a	b ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u _c	Rag bolt DIN 529
32125	71 80	0.37 0.55	241	68	28	60 62	80	330	25	480	290	115	60	65	177	710			41 32	694 734	730	M 16 x 160
32160	71 80 80	0.37 0.55 0.75			34	65 67 70													61 52	694 734 734		
32200	80 80 90 S	0.55 0.75 1.1			41	78 80 83													80 70	734 734 784		
32250	90 S 90 L 100 L	1.1 1.5 2.2	342	80	59	115 118 125	100	450	30	540	400	130	75	80	260	800			90 80	784 804 854	820	M 20 x 250
40125	71 80	0.37 0.55	241	68	29	61 63	80	330	25	480	290	115	60	65	177	710			41 32	694 734	730	M 16 x 160
40160	80 80	0.55 0.75			36	70 78													52	734 734		
40200	80 90 S 90 L	0.75 1.1 1.5	301		44	79 86 89													80 70	754 784 804		
40250	90 S 90 L 100 L 100 L	1.1 1.5 2.2 3	342	80	61	117 120 127 129	100	450	30	540	400	130	75	80	260	800			90 80	784 804 854 854	820	M 20 x 250
40315	100 L 100 L 112 M 132 S	2.2 3 4 5.5	S 385		89	201 203 221 233													125 113 1009 93	989 989 1009 1079		
50125	80 80 90 S	0.55 0.75 1.1	241	68	32	66 68 71		330	25	480	290	115	60	65	197	710			52 42	754 754 784	730	M 16 x 160
50160	80 90 S 90 L	0.75 1.1 1.5	301		38	77 80 83													80 70	754 784 804		
50200	90 S 90 L 100 L 100 L	1.1 1.5 2.2 3	272		46	88 91 99 101													60	784 804 854 854	820	M 20 x 250
50250	100 L 100 L 112 M 132 S	2.2 3 4 5.5	342	80	63	129 131 149 169		450	30	540	400	130		80	260	800			80 68 48	854 854 874 944		
50315	112 M 132 S 132 M	4 5.5 7.5	S 385	95	80	176 195 211													113 93	981 1039 1077		
65125	80 90 S 90 L	0.75 1.1 1.5	301	68	39	79 81 92		390	25	480	350	150	75	65	225	900			80 70	754 784 804	730	M 16 x 160
65160	90 L 100 L	1.5 2.2	303		43	96 102													60	804 854	820	M 20 x 250
65200	100 L 100 L 112 M 132 S	2.2 3 4 5.5	342	80	52	118 120 138 250													80 68 48	854 854 874 944		