



for units with standard coupling

n = 1450 rpm

Size	Motor		Bedplate No.	Coupling N - B	Weight		a	b ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u ₂	Rag bolt DIN 529
	Size	kW			Pump kg	Compl. unit kg																
65250	112 M	4	S 385	80	81	213 225 237	100	490	40	740	440	190	90	110	310	1120		88	984	-	-	M 20 x 250
	132 S	5.5		66														1054				
	132 M	7.5		66														1094				
65315	132 S	5.5	S 385	95	100	245 257 296 326	125	490	40	740	440	190	90	110	335	1120		93	1080	-	-	M 20 x 250
	132 M	7.5		65														1120				
	160 M	11		65														1210				
80160	90 L	1.5	342	66	53	112 118 120 138	125	450	30	540	400	130	75	80	260	800		90	830	820	G 1/2	M 20 x 250
	100 L	2.2		80														880				
	100 L	3		80														880				
80200	100 L	3	S 385	80	70	184 202 214	125	490	40	740	440	190	90	110	290	1120		68	990	-	-	M 20 x 250
	112 M	4		80														1010				
	132 S	5.5		48														1080				
80250	132 S	5.5	S 385	95	91	244 248 287	125	490	40	740	440	190	90	110	310	1120		68	1090	-	-	M 20 x 250
	132 M	7.5		40														1120				
	160 M	11		40														1210				
80315	160 M	11	S 385	110	107	315 335	125	490	40	740	440	190	90	110	360	1120		90	1210	-	-	M 20 x 250
	160 L	15		120														1319				
	160 L	18.5		100														1359				
80400	180 L	22	S 486	125	154	430 509	125	610		840	550	205	80	100	380	1250		100	1399	-	-	M 24 x 400
	200 L	30		80														1449				
	200 L	30		80														1449				
100160	100 L	2.2	S 385	80	72	146 148 168 187	140	490	40	740	440	190	90	110	310	1120		100	981	-	-	M 20 x 250
	100 L	3		95														991				
	112 M	4		88														981				
100200	112 M	4	S 385	80	85	138 150 162 201	140	490	40	740	440	190	90	110	310	1120		68	1039	-	-	M 20 x 250
	132 S	5.5		88														1010				
	132 M	7.5		68														1080				
100250	132 M	7.5	S 385	95	103	262 301 331	140	490	40	740	440	190	90	110	335	1120		68	1120	-	-	M 20 x 250
	160 M	11		93														1134				
	160 L	15		85														1224				
100315	160 L	15	S 386	110	116	344 379 409	140	490	40	740	440	190	90	110	360	1120		85	1274	-	-	M 20 x 250
	180 M	18.5		90														1274				
	180 L	22		70														1314				
100400	160 M	11	S 486 A	95	166	385 405 440 460 506 599	140	610		840	550	205	110	106	380	1250		126	1284	-	-	M 24 x 400
	160 L	15		106														1374				
	180 M	18.5		86														1464				
125200	132 M	7.5	S 385	95	95	229 278 299	140	490	40	740	440	190	90	110	360	1120		118	1092	-	-	M 20 x 250
	160 M	11		90														1224				
	160 L	15		70														1354				
125250	160 M	11	S 386	110	110	318 338 373 403	140	490	40	740	440	190	90	110	360	1120		126	1334	-	-	M 20 x 250
	160 L	15		106														1374				
	180 M	18.5		86														1464				
125315	160 L	15	S 486 A	110	145	383 418 438 486	140	610	40	740	440	190	90	110	380	1250		126	1334	-	-	M 20 x 250
	180 L	18.5		106														1374				
	200 L	30		86														1464				
125400	200 L	30	S 487 A	125	177	519 609 639 801	140	610	40	740	440	190	90	110	415	1400		121	1464	-	-	M 20 x 250
	225 S	37		96														1484				
	225 M	45		96														1504				
150200	132 M	7.5	S 607	95	116	317 364 385 412	140	740	40	740	440	190	90	110	380	1250		121	1464	-	-	M 20 x 250
	160 M	11		120														1257				
	160 L	15		100														1279				
150250	180 L	15	S 486 A	110	121	391 417 431 511	140	610	40	740	440	190	90	110	380	1250		120	1257	-	-	M 24 x 400
	180 M	18.5		100														1279				
	200 L	30		80														1394				
150315	180 L	22	S 607	125	159	496 551 624 664 783	140	740	40	740	440	190	90	110	380	1400		100	1434	-	-	M 24 x 400
	200 L	30		80														1484				
	225 S	37		55														1524				
150400	225 M	45	S 607	140	207	706 831 1021 1081	140	740	40	740	440	190	90	110	415	1400		30	1634	-	-	M 24 x 400
	250 M	55		90														1524				
	280 S	75		65														1634				
200250	225 M	45	S 608	160	207	706 831 1021 1081	140	740	40	740	440	190	90	110	415	1400		35	1784	-	-	M 24 x 400
	250 M	55		90														1524				
	280 S	75		65														1634				
200250	160 M	11	S 486 A	95	186	402 425 450 465 552	140	610	40	740	440	190	90	110	380	1250		126	1352	-	-	M 24 x 400
	160 L	15		110														1402				
	180 M	18.5		106														1442				

* Dimensions for motor with enclosure IP 54, make of motor to our choice

Bedplate drawing for units with spacer coupling

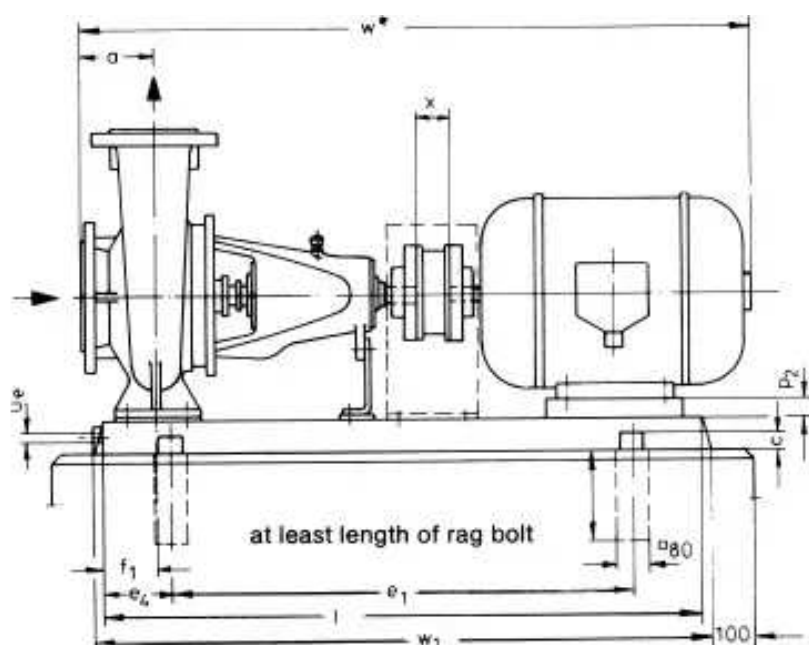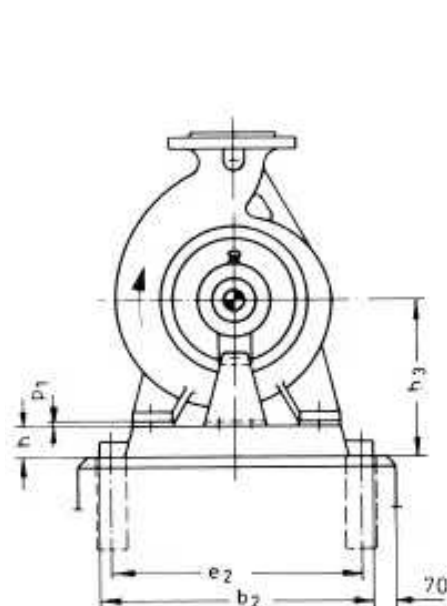

Dimensions in mm; general tolerances (bedplates) for cast parts to DIN 1686/GTB 17, for welded parts to DIN 8570 B

n = 2900 rpm

Size	Motor		Bedplate No.	Coupling N-B	Weight		a	D ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u ₈	x	Rag bolt DIN 529																				
	Size	kW			Pump kg	Compl. unit kg																																					
32125	80	0,75	272	80	28	65	80	360	25	540	320	130	60	65	177	800	-	32	870	820	G1/2	140	M 16 x 160																				
	80	1,1				67																																					
	90 S	1,5				69																																					
	90 L	2,2				79																																					
32160	90 S	1,5	272		75	360	540	320	130	800	42	900	820																														
	90 L	2,2	86		390	600	350	150	900	32	970	920																															
	100 L	3	92		225	20	990																																				
	112 M	4	109			60	970																																				
32200	100 L	3	303		41	105	390	600	350	150	225		900	48	990																												
	112 M	4				117						28		1060																													
	132 S	5,5				135						48		1080	1020																												
	132 S	7,5				142																																					
32250	132 S	5,5	344	95	59	168	100	450	30	660	400	170	75	80	260	1000	48	1080	1020	-	-	M 20 x 250																					
	132 S	7,5				175												490					40	740	440	190	110	290	1120	20	1210												
	160 M	11				261												20					1260	-	-																		
	160 M	15				268																																					
40125	80	1,1	272		80	29	69	80	360	25	540	320	130	60	65	177	800	-	32				870	820	G1/2	140	M 16 x 160																
	90 S	1,5					72																																				
	90 L	2,2					85																																				
	100 L	3					91																																				
40160	100 L	3	303			36	98	390	600	350	150	60	65	197	900	32	970		920																								
	112 M	4					116										28						990																				
	132 S	5,5					131										20						990																				
	132 S	5,5					139										28						1080																				
40200	132 S	7,5	303	44		146	450	40	740	440	190	75	110	290	1120	20	1210		-	-	-	-	M 20 x 250																				
	160 M	11				246											20							1260																			
	160 M	11				264											28							1300																			
	160 M	15				272																																					
40250	160 L	18,5	S 385	61	291	490	40	740	440	190	75	110	290	1120	20	1260	-	-	-	-				M 20 x 250																			
	180 M	22			322											28									1300																		
	90 L	2,2			84											32									390	25	600	350	150	60	65	197	900	42	940	920	G1/2	140	M 16 x 160				
	100 L	3			91																																						
112 M	4	107																																									
132 S	5,5	128																																									
50125	132 S	7,5	303	80	32	135	100	390	25	600	350	150	60	65	197	900	20	1010							920	G1/2	140	M 16 x 160															
	132 S	5,5				134												38											490	40	740	440	190	60	65	225	270	1120	28	1080			
	132 S	7,5				141															46	274	295																	310	1250	20	1390
	160 M	11				241																																					
50160	160 M	15	S 385	95	38	249	490	40	740	440	190	75	110	290	1120	20	1210								-	-	M 20 x 250																
	160 M	11				249																																					
	160 M	15				257																																					
	160 L	18,5				278																																					
50200	160 M	15	S 385	95	46	274	490	40	740	440	190	75	110	290	1120	20	1260	-	-	M 20 x 250																							
	160 L	18,5				278																																					
	160 M	15				295																																					
	180 M	22				327																																					
50250	200 L	30	S 386	125	63	402	490	40	840	205	75	310	1250	20	-	1390	-	-	M 20 x 250																								
	200 L	37				422																																					
	200 L	30				402																																					
	200 L	37				422																																					



Bedplate drawing
for units with spacer coupling

n = 2900 rpm

Size	Motor		Bedplate No.	Coupling N-B	Weight Pump kg	Compl. unit kg	a	b ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u _e	x	Rag bolt DIN 529												
65125	132 S	5,5	344	95	39	151	100	450	30	660	400	170	75	80	240	1000	-	28	1080	1020	G 1/2	140	M 20 x 250												
	132 S	7,5				158																		490	40	740	440	190	110	270	1120	-	1210	-	-
	160 M	11				252																													
65160	132 S	7,5	344		43	161	100	450	30	660	400	170		80	240	1000	-	28	1080	1020	G 1/2														
	160 M	11				245																													
	160 M	15				253																													
65200	160 M	15	S 385		52	263	100	490	740	440	190	110		270	1120	-	20	1210	1260	1300															
	160 L	18,5				283																													
	180 M	22				315																													
	200 L	30		388																															
65250	180 M	22	S 386	110	354	100	510	840	205	940	450	230		90	310	1250	20	-	1390	1410															
	200 L	30			429																														
	200 L	37			449																														
	225 M	45			548																														
	250 M	55			683																														
80160	160 M	11	S 385	95	53	255	125	490	740	440	190	75	110	290	1120	-	-	1235	1285	1325															
	160 M	15				263																													
	160 L	18,5				283																													
	180 M	22				315																													
	200 L	30				389																													
80200	160 L	18,5	S 386	95	70	312	125	490	840	205	940	450	230	110	310	1250	-	-	1395	1435															
	180 M	22				344																													
	200 L	30				418																													
	200 L	37				438																													
	225 M	45				535																													
80250	200 L	30	S 387	125	91	439	125	510	40	940	450	230	90	110	310	1400	45	-	1500	-	-														
	200 L	37				459																													
	225 M	45				557																													
	250 M	55				736																													
	280 S	75				929																													
100160	160 L	18,5	S 386	95	72	313	125	490	840	440	205	90	110	310	1250	-	40	1395	1465																
	180 M	22				345																													
	200 L	30				411																													
	200 L	37				441																													
100200	180 M	22	S 386	110	85	359	125	490	840	440	205	90	110	310	1250	-	20	1435	1525																
	200 L	30				414																													
	200 L	37				434																													
	225 M	45				553																													
	250 M	55				729																													
	280 S	75				923																													
	225 M	45				568																													
100250	250 M	55	S 608	140	103	748	140	740	1060	690	230	100	100	380	1600	80	-	1795	1580																
	250 M	55				748																													
	280 S	75				943																													
	280 M	90				1003																													
125200	315 S	110	S 608	160	95	1203	140	740	1060	690	270	100	100	380	1600	90	-	1920	1671	1812	180														
	250 M	55				742																													
	280 S	75				936																													
	280 M	90				996																													

* Dimensions for motor with enclosure IP 54, make of motor to our choice

Bedplate drawing for units with spacer coupling

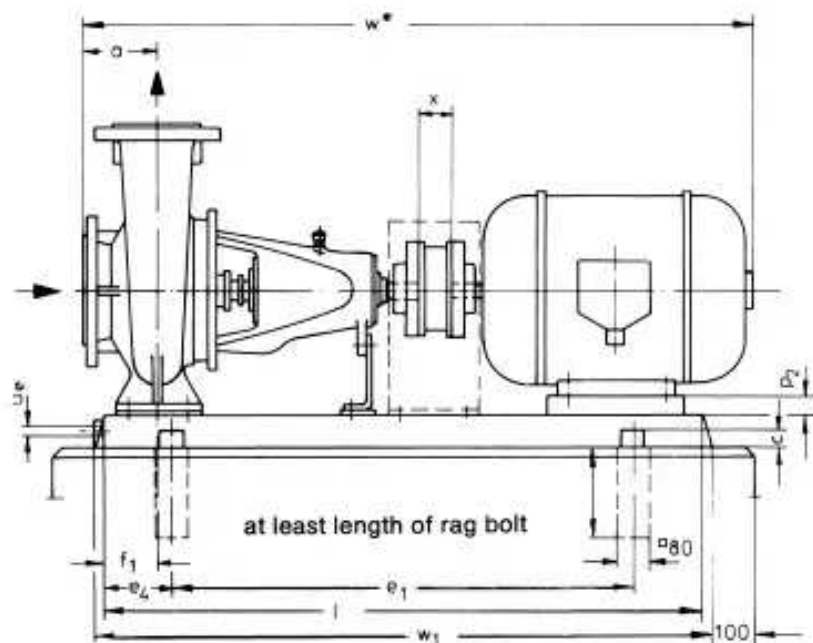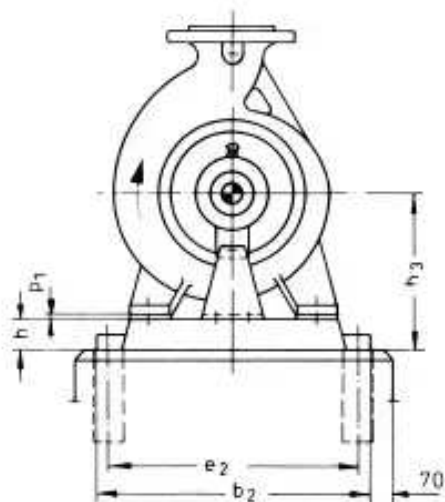

Dimensions in mm; general tolerances (bedplates) for cast parts to DIN 1686/GB 17, for welded parts to DIN 8570 B

n = 1450 rpm

Size	Motor		Bedplate No.	Coupling N-B	Weight Pump kg	Compl. unit kg	a	b ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u ₀	x	Rag bolt DIN 529																				
	Size	kW																																									
32125	71	0,37	272	80	28	64	80	360	25	540	320	130	60	65	177	800			41	830	820			M 16 x 160																			
	80	0,55				67													32	870																							
32160	71	0,37			34	71													61	830																							
	80	0,55				74													52	870																							
32200	80	0,75			76	52													870																								
	80	0,55			41	82													80	870																							
	80	0,75				84													80	870																							
	90 S	1,1				89													70	900																							
32250	90 S	1,1			59	132													90	920					100	450	30	660	400	170	75	80	260	1000			90	940	1020			M 20 x 250	
	90 L	1,5				137													90	940																							
	100 L	2,2	143			90	990																																				
40125	71	0,37	272		80	29	68	80	360	25	540	320	130	60	65	177	800			41	830	820			M 16 x 160																		
	80	0,55					71													32	870																						
40160	80	0,55				36	81													52	870																						
	80	0,75					83													52	870																						
40200	80	0,75				44	91													80	890																						
	90 S	1,1					102													90	920																						
	90 L	1,5					112													90	940																						
40250	90 S	1,1				61	132													100	450					30	660	400	170	75	80	260	1000				90	920	1020			M 20 x 250	
	90 L	1,5					135																														90	940					
	100 L	2,2					141																														80	990					
	100 L	3	144				80	990																																			
40315	100 L	2,2	S 385			89	215	125	490	40	740	440	190	110	310	1120				100	1125																						
	100 L	3					218													88	1145																						
	112 M	4					238													68	1215																						
	132 S	5,5					248																																				
50125	80	0,55	272			80	32	72	360		540	320	130	60	65	197	800			52	890	820			M 16 x 160																		
	80	0,75						74												42	920																						
	90 S	1,1					78	80												890																							
50160	80	0,75					38	82												70	920																						
	90 S	1,1						86												70	940																						
50200	90 L	1,5					46	98												920	920																						
	90 S	1,1						390												25	600					350	150	60	65	225	900	70	940	920									
	90 L	1,5						360												540	320					130	800	70	920	820													
	100 L	2,2						390												600	350					150	900	60	990	920													
	100 L	3						118																																			
50250	100 L	2,2	63				148	450	30	660	400	170		80	260	1000				80	990	1020				M 20 x 250																	
	100 L	3					151													68	1010																						
	112 M	4					173													48	1080																						
	132 S	5,5					181													113	1145																						
50315	112 M	4	S 385				80	225	125	490	40	740	440	190	110	335	1120				1215																						
	132 S	5,5						235													93						1255																
	132 M	7,5						253																																			
65125	80	0,75	303				80	39	96	390	25	600	350	150	75	65	225	900			80	890	920			M 16 x 160																	
	90 S	1,1							102												70	920																					
	90 L	1,5						107	70												940																						
65160	90 L	1,5						43	115												70	940																					
	100 L	2,2							124												60	990																					
65200	100 L	2,2						52	136												450	30					660	400	170		80	260	1000				80	990	1020				M 20 x 250
	100 L	3							139																												68	1010					
	112 M	4							159																												48	1080					
	132 S	5,5							168																																		

Bedplate drawing
for units with spacer coupling

n = 1450 rpm

Size	Motor Size kW	Bedplate No.	Coupling N-B	Weight Pump kg	Weight Compl. unit kg	a	b ₂	c	e ₁	e ₂	e ₄	f ₁	h	h ₃	l	p ₁	p ₂	w*	w ₁	u ₀	x	Rag bolt DIN 529
65250	112 M 4	S 385	95	81	219	100	490	40	740	440	190	90	110	310	1120			88	1120			
	132 S 5				228													68	1190			
	132 M 7,5				245													93	1230			
	132 S 5,5				249													85	1215			
65315	132 M 7,5	S 386	110	100	265	125	490	40	840	205		90	110	335	1250			85	1255			
	160 M 11				311													90	1345			
	160 L 15				338													120	1395			
	90 L 1,5				126													80	965			
80160	100 L 2,2	344	80	53	132	125	450	30	660	400	170	75	80	260	1000			80	1015	1020	G1/2	M 20 x 250
	100 L 3				135													68	1035			
	112 M 4				154													80	1125			
	100 L 3				196													68	1145			
80200	112 M 4	S 385	95	70	213	125	490		740	440	190	90	110	290	1120			48	1215			
	132 S 5,5				222													68	1255			
	132 S 5,5				244													40	1345			
	132 M 7,5				259													90	1345			
80250	160 M 11	S 386	110	107	308	125	490		840	205		90	110	310	1250			40	1345			
	160 M 11				326													90	1395			
	160 L 15				350													120	1455			
	160 L 15				403													100	1495			
80400	180 M 18,5	S 487	125	154	449	125	610		940	550	230	80	100	380	1400			80	1585	140		M 24 x 400
	180 L 22				473													100	1535			
	200 L 30				511													80	1585			
	100 L 2,2				200													100	1155			
100160	100 L 3	S 385	95	72	204	125	490		740	440	190	90	110	310	1120			88	1175			
	112 M 4				215													68	1245			
	132 S 5,5				224													88	1145			
	112 M 4				229													68	1215			
100200	132 S 5,5	S 386	110	85	242	125	490		840	205		90	110	310	1250			40	1345			
	132 M 7,5				258													65	1270			
	160 M 11				304													40	1360			
	132 M 7,5				278													90	1410			
100250	160 M 11	S 385	110	103	324	125	490		840	205		90	110	335	1250			70	1450			
	160 L 15				349													120	1490			
	160 L 15				365													100	1510			
	160 L 15				407													80	1600			
100315	180 M 18,5	S 387	125	116	443	125	510		940	550	230	110	100	380	1400			120	1470			
	180 L 22				494													100	1550			
	200 L 30				576													80	1600			
	225 S 37				669													55	1630			
100400	160 M 11	S 487 A	95	166	397	125	610		940	550	230	110	100	380	1400			120	1470			
	160 L 15				425													100	1510			
	180 M 18,5				469													80	1600			
	180 L 22				494													55	1630			
125200	132 M 7,5	S 385	110	95	271	140	490	40	740	440	190	90	110	360	1250			118	1310			
	160 M 11				316													90	1400			
	160 L 15				339													90	1450			
	160 M 11	S 386	95	110	334													70	1450			
125250	160 L 15				355													120	1470			
	180 M 18,5				369													100	1510			
	180 L 22				436													80	1600			

Data for pump size – Instructions for ordering

Type+Size	Hydraulic	Bearings+Direction of rotation	Shaft seal	Construction materials	Casing gasket	Oil level indicator
	A	C Bearing housings 25 and 35¹⁾: two deep groove ball bearings in accordance with DIN 625. Oil lubrication. Bearing housing 45: one twin row contact ball bearing in accordance with DIN 628 at the pump end, and one deep groove ball bearing in accordance with DIN 625 at the drive end. Oil lubrication. B One twin row contact ball bearing in accordance with DIN 628 at the pump end, and one deep groove ball bearing in accordance with DIN 625 at the drive end. Grease Lubrication.	041 Self-sealing uncooled soft packed stuffing box. 051 Uncooled soft packed stuffing box with sealing fluid from an outside source and flushing. 501 Soft packed stuffing box for intensive cooling. BKW: Unbalanced single mechanical seal of elastomeric bellows design, NBR, with self-contained circulation. BKS: Unbalanced single mechanical seal with elastomeric bellows, FKM, with self-contained circulation. BK3: Unbalanced single mechanical seal of elastomeric bellows design, EPDM, with self-contained circulation.	0B Main components of 0.6025 0C As 0B but impeller of 2.1050.01 shaft sleeve of 2.1050.02 0E As 0B, but impeller of 1.4408 0R As 0B, but shaft of 1.4021 0S As 0C, but shaft of 1.4021 0U As 0E, but shaft of 1.4021 3B Main components of 2.1050.01, shaft of 1.4571	2 Flat gasket 3 Confined gasket	1 Oil sight glass 2 Constant Level Oiler
32125 NOWC . . . 200250	A	Alternatively B C	Alternatively 041 051 501 BKW BKS BK3	Alternatively 0B 0C 0E 0R 0S 0U 3B	Alternatively 2 3	Alternatively 1 2

¹⁾ For grease lubrication on the pump side a double row angular contact ball bearing to DIN 628, on the drive side a deep groove ball bearing to DIN 625.

This construction is also possible for oil lubrication as a reinforced bearing arrangement.

Extent of supply	Designation	Motor selection table					
Pump with free shaft end	01	Three phase motor n = 2900 rpm			Three phase motor n = 1450 rpm		
		kW	Size	Designation	kW	Size	Designation
Pump with coupling, finish bored on motor side and with coupling guard	41	0,75	80	FA	0,37	71	EB
		1,1	80	GA	0,55	80	FB
		1,5	90 S	HA	0,75	80	GB
		2,2	90 L	JA	1,1	90 S	HB
As above, but pump and coupling guard mounted on bedplate, including shims for pump or motor and one set of rag bolts	53	3	100 L	KA	1,5	90 L	JB
		4	112 M	MA	2,2	100 L	KB
		5,5	132 S	NA	3	100 L	LB
		7,5	132 S	OA	4	112 M	MB
		11	160 M	SA	5,5	132 S	NB
		15	160 M	TA	7,5	132 M	PB
As above, but with motor e.g. 18.5 kW three phase motor (50 Hz, 380/660 V) at 2900 rpm	e.g. UA	18,5	160 L	UA	11	160 M	SB
		22	180 M	VA	15	160 L	UB
		30	200 L	XA	18,5	180 M	VB
		37	200 L	YA	22	180 L	WB
		45	225 M	AA	30	200 L	XB
		55	250 M	BA	37	225 S	ZB
		75	280 S	CA	45	225 M	AB
		90	280 M	DA	55	250 M	BB
		110	315 S	EA	75	280 S	CB
					90	280 M	DB

Example of order

For pump size NOWC 80160 AC 501 0B 3 1 with coupling finish bored on motor side and with coupling guard the full order number is

NOWC 80160 AC 501 0B 3 1 41

For pump size NOWC 80160 AC 501 0B 3 1 as complete unit with 18.5 kW three phase motor, 2900 rpm, the full order number is

NOWC 80160 AC 501 0B 3 1 UA

When ordering the extent of supply corresponding to 41 and 53, please state the motor selected in all cases so that the coupling can be finish bored on the motor side, the correct bedplate selected and the right shims provided.

Subject to modification without notice to incorporate technical improvements.

END SUCTION PUMPS PERFORMANCE CURVES

