



euroflow
**Horizontal Stainless Steel
End Suction Centrifugal Pump**

SZS/SZSS

50HZ OR 60HZ



SZB/SZBS

Horizontal Stainless Steel End Suction Centrifugal Pump

APPLICATIONS

- General water supply
- Cooling water system
- Sprinkler system
- Agriculture
- Boosting & circulation systems
- Water treatment
- Medicine & sanitation
- Petrochemical industry
- Fire fighting system

OPERATING LIMITS

- Flow rate up to 200m³/h
- Head up to 74m
- Max operating pressure: 10bar
- Water temperaturer: -20°C- +100°C
- Max ambient temperaturer: +50°C

DESIGN

Hydraulic parts

All stainless steel horizontal single stage not self-priming design, suitable for various mediums including water or industrial liquid. Manufactured in AISI316 or AISI304 stainless steel in compliance with EN733 DIN24255. The assembly dimensions of the mechanical seal are in compliance with DIN24960-ISO3069. Pump with stub shaft and standard motor.

Electric motor

The pump is coupled with a totally enclosed, fan-cooled squirrel-cage aluminum casing(less than 7.5kw) IEC standard motor built-in thrermal overload unit.

Enclosure class: IP55

Speed: 2900rpm or 3500rpm

Insulation class: F

Standard voltage: 1x220-240V, 50hz or 60hz
3x220-240/380-415V, 50hz or 60hz

Sound level: <75dB(A)


MODEL CODE

SZS 50 - 32 - 200/5.5

- Motor power (kW)
- Impeller nominal diameter (mm)
- Diameter of discharge port (mm)
- Diameter of suction port (mm)
- Series name:
SZS-50Hz stub shaft type
SZSS-60Hz stub shaft type

SZB-50Hz monoblock type
SZBS-60Hz monoblock type(up to 65-50-200)



GENERAL ARRANGEMENT DRAWING AND MATERIAL

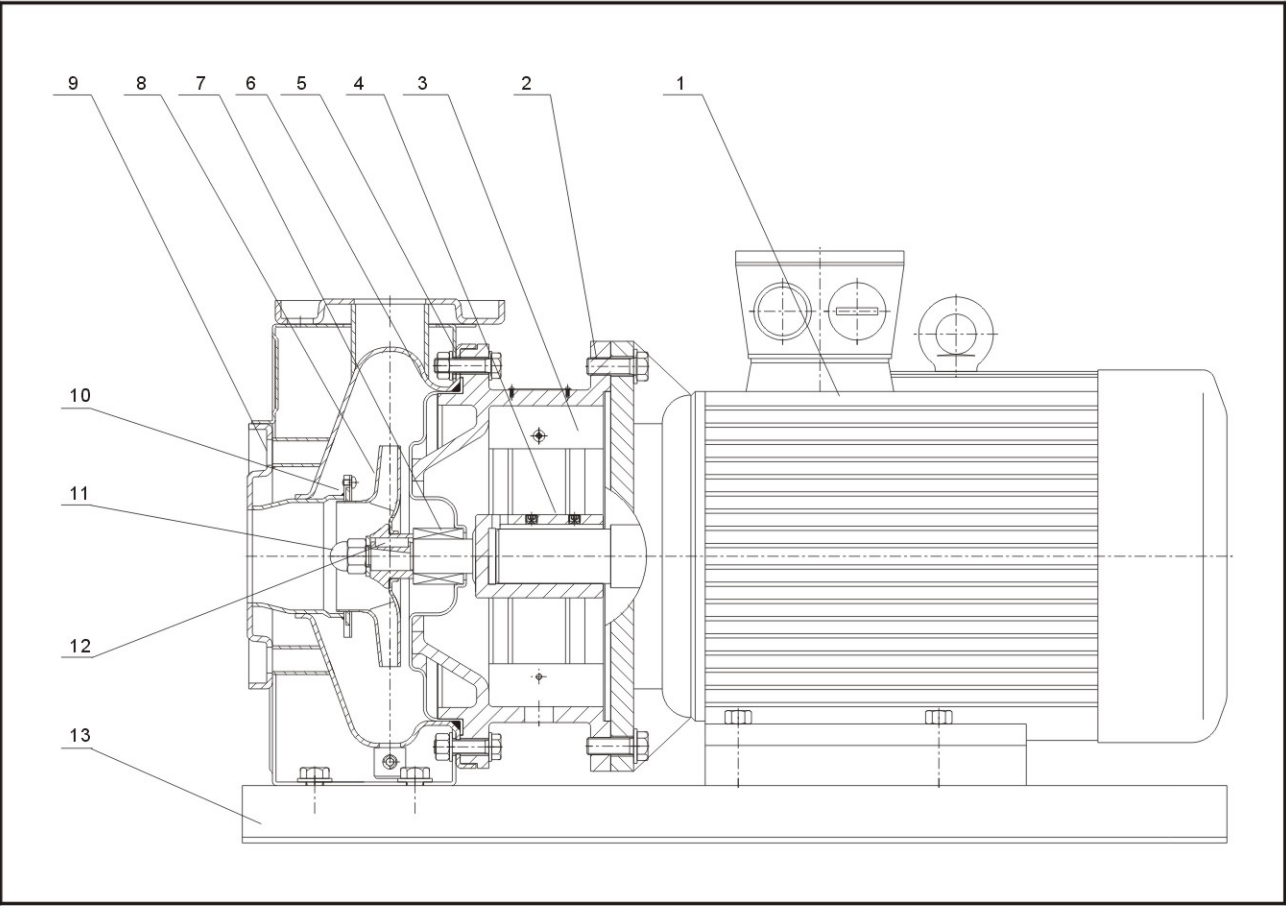

Part No.	Name	Material	AISI/ASTM
1	Motor		
2	Motor bracket	Cast iron	ASTM25B
3	Guard plate	Stainless steel	AISI 304
4	Stub shaft	Stainless steel	AISI 420/AISI 304
※ 5	Rubber parts	Rubber	EPDM
※ 6	Lining of pump head	Stainless steel	AISI 304
※ 7	Mechanical seal	Carbon/Silicon Carbide	
※ 8	Impeller	Stainless steel	AISI 304
9	Casing	Stainless steel	AISI 304
※ 10	Wear ring	PTEF	PTEF
※ 11	Impeller nut	Stainless steel	AISI 304
※ 12	Impeller key	Stainless steel	AISI 304
13	Base plate	Carbon steel	ASTMA570

※Recommended spare parts.
316 Stainless steel for the pump on request.

SELECTION CHARTS

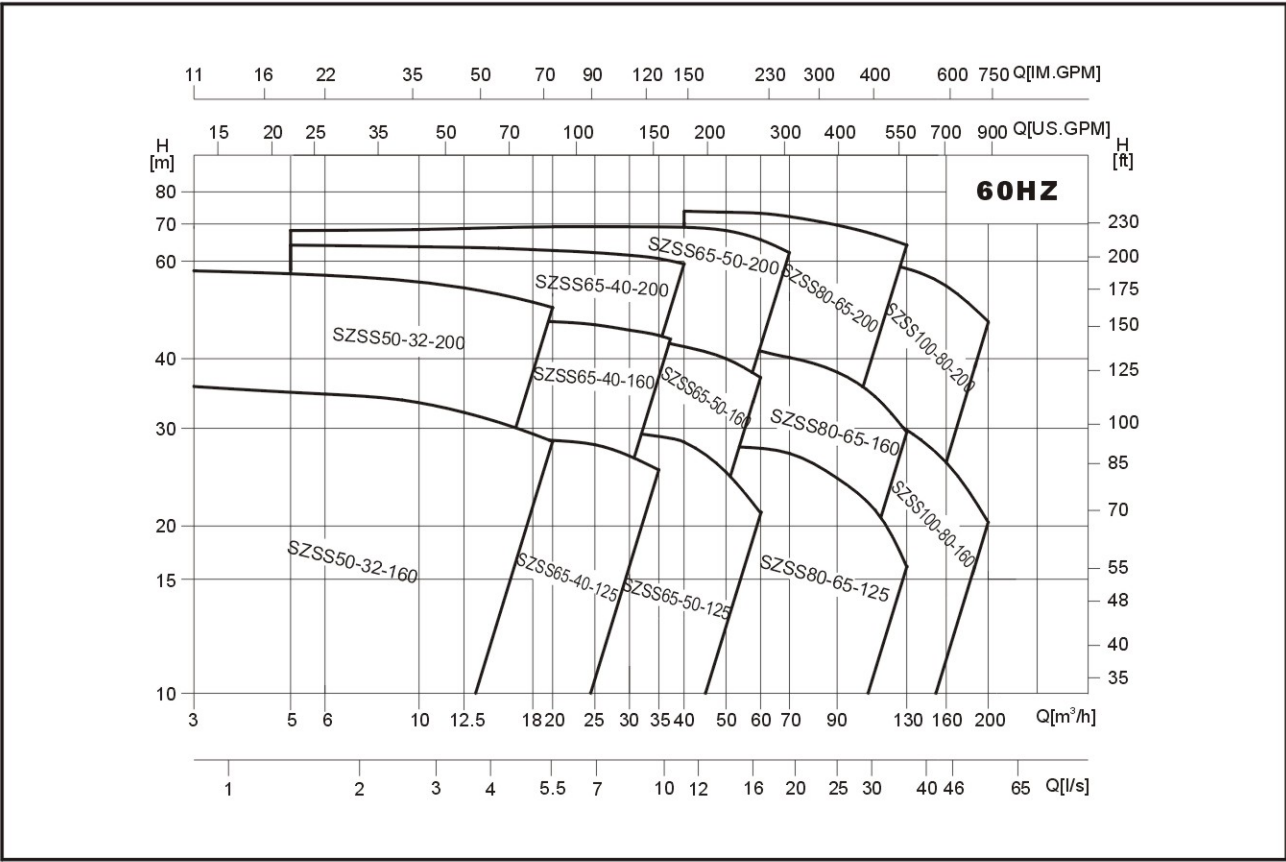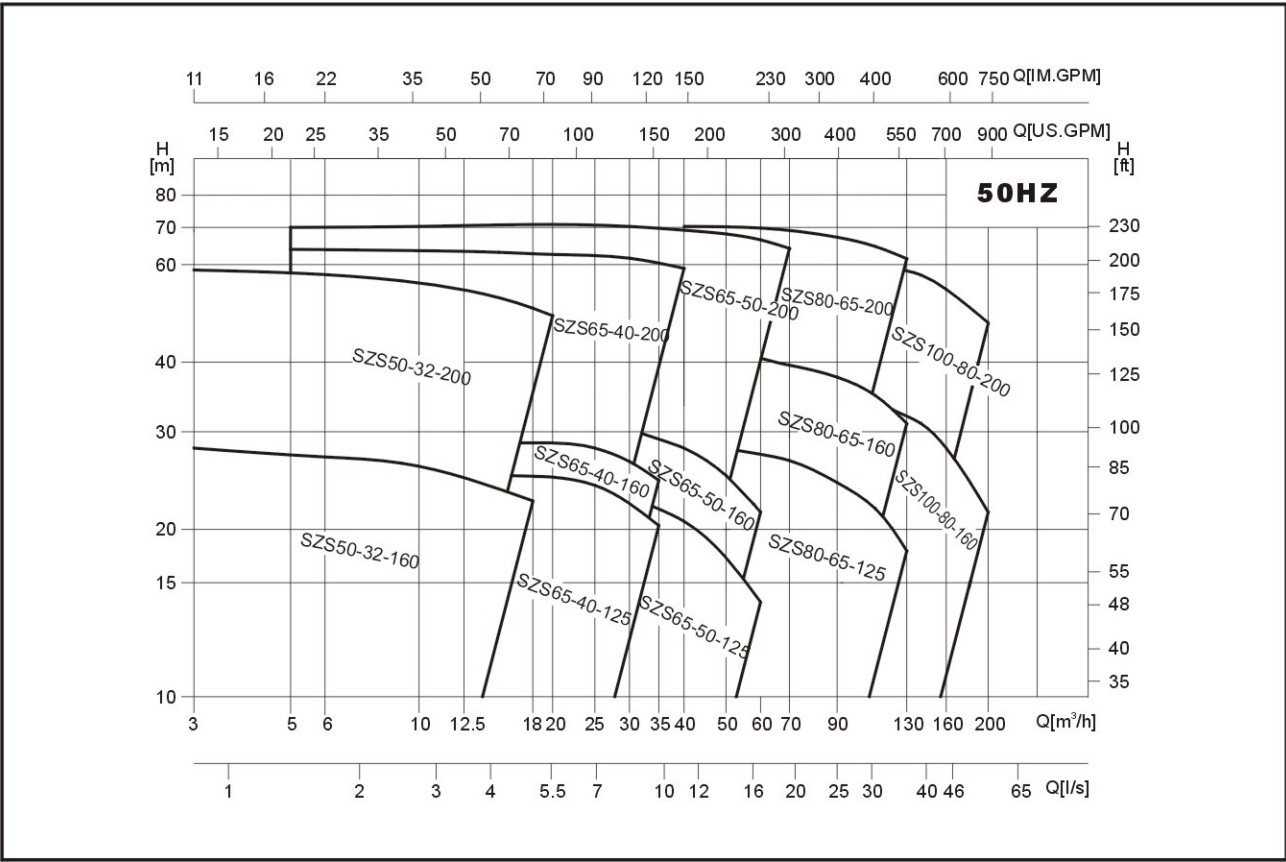

OPERATING TABLE 50HZ

Model	Power (kW)	Q (m³/h)	Head (m)	3	5	10	12.5	15	18	20	25	30	35	40	50	60	70	80	90	100	110	120	130	140	160	180	192	200
50-32-160/1.1	1.1	18.7	18.2	17	16.4																							
50-32-160/1.5	1.5	22.5	22.3	21	20	19	18																					
50-32-160/2.2	2.2	28	27.5	26	25	24	22.5																					
50-32-200/3.0	3	34.9	34.4	33	32	31	30	29																				
50-32-200/4.0	4	45.7	45	43	42	41	39	38																				
50-32-200/5.5	5.5	58.5	58	56	54	53	50	49																				
65-40-125/1.5	1.5			15.4	15.2	15	14.7	14.4	13	11.3																		
65-40-125/2.2	2.2			19.7	19.6	19.5	19.3	19	18	16.7	15.2																	
65-40-125/3.0	3			25.3	25.2	25.1	25	24.8	24	22.3	20.3																	
65-40-160/4.0	4			29.7	29.4	29.3	29	28.9	28	26.5	24.5																	
65-40-200/5.5	5.5			37.2	37	36.7	36.5	36.4	36	35.5	34.6	33.3																
65-40-200/7.5	7.5			47.5	47.2	47	46.8	46.6	46	45.2	44.5	43.3																
65-40-200/11.0	11			63.5	63.2	63	62.8	62.5	62	61.5	60.5	59																
65-50-125/3.0	3						17.3	17.2	17	16.4	15.7	15.1	10															
65-50-125/4.0	4						23.8	23.6	23	22.6	21.5	20.7	18	14.8														
65-50-160/5.5	5.5						31.1	31	31.5	30	29	28	25	21.5														
65-50-200/7.5	7.5						36.4	36.4	36	35.6	35	34.1	32	29.6														
65-50-200/9.2	9.2						43.5	43.5	43.2	43	43.5	42	40	37.5														
65-50-200/11.0	11						51.3	51	51.5	50	49.8	49.3	48	45.6														
65-50-200/15.0	15						59.7	59.6	59.5	59.5	59.3	59	58	56.2	53													
65-50-200/18.5	18.5						70.2	70.1	70.1	70	69.5	69.1	68	66.4	64													
80-65-125/5.5	5.5											19.3	18.7	18	17	15.8	14.8	13	11.4	9.7								
80-65-125/7.5	7.5											24.5	23.8	23.1	22.2	21	19.6	18	16.2	14.1								
80-65-125/9.2	9.2											28.1	27.8	27.3	26.6	25.7	24.3	23	21.8	20.1	18.3							
80-65-160/11.0	11											33.9	33	32.2	31.3	29.9	28.8	27	25.1	22.9	20.7							
80-65-160/15.0	15											41.8	41.1	40.4	39.5	38.6	37.6	36	34.8	33	31							
80-65-200/18.5	18.5											51	50.5	49.6	48.7	47.6	46.3	45	43.5	42.2	40.2							
80-65-200/22.0	22											57.7	57.2	56.8	55.9	55.1	54	53	51.6	49.7	48.2							
80-65-200/30.0	30											70.2	70.2	69.6	68.9	68.2	67.1	66	64.6	63.3	61.4							
100-80-160/11.0	11															23.8	23.3	22.7	21.7	21.1	20.3	19.7	18.8	17.6	15	11.8	9.7	
100-80-160/15.0	15															32.3	31.4	30.8	29.7	29.1	28.2	27.2	26	25.1	22	18.8	16.9	16.1
100-80-160/18.5	18.5															36.2	35.5	35.2	34.5	33.8	33	32.7	31.7	31	28	24.8	22.8	21.5
100-80-200/22.0	22															43.5	42.7	42	40.9	39.7	39	38.3	36.9	35.9	33	29	26.3	24.9
100-80-200/30.0	30															55.4	54.6	54.1	53	52.6	51.5	50.5	49.2	48.2	45	41.9	39.2	37.6
100-80-200/37.0	37															64.1	63	62.5	61.7	61	59.6	59	58	57.4	54	51.2	48.9	47.1


OPERATING TABLE

60HZ

Model	Power (kW)	Q (m³/h)	3	5	6.3	9	10	12.5	15	18	20	25	30	35	40	50	60	70	80	90	100	110	120	130	140	160	180	200
50-32-160/1.1	1.1	Head (m)	19	18.3	18	17.3	17	16.4																				
50-32-160/1.5	1.5		23.4	22.6	22.2	21.2	20.8	20	18.8	16.8																		
50-32-160/2.2	2.2		28.6	27.7	27.4	26.4	25.8	25	24	22.8																		
50-32-200/3.0	3		35.6	34.8	34.5	33.7	33	32	30.8	29.3	28.4																	
50-32-200/4.0	4		45	44.2	44.1	43.3	42.9	42	41.2	40	39.1																	
50-32-200/5.5	5.5		57.5	56.8	56.5	55.7	55.2	54	52.5	50.5	49.4																	
65-40-125/1.5	1.5			16.1	15.9	15.7	15.6	15.3	15.1	14.5	14.2	13	11.2															
65-40-125/2.2	2.2			20.3	20.2	20.1	20	19.8	19.7	19.3	19.1	18	16.2	14.3														
65-40-125/3.0	3			26	25.8	25.7	25.6	25.3	25.2	24.7	24.6	24	22.5	20.7														
65-40-125/4.0	4			29.6	29.4	29.4	29.4	29.2	29.1	28.6	28.5	28	26.7	25.2														
65-40-160/5.5	5.5			37.8	37.5	37.4	37.3	37	36.8	36.4	36.3	36	35.5	34.5	33.2													
65-40-160/7.5	7.5			48	47.9	47.9	47.8	47.4	47.2	46.5	46.6	46	45	44	42.5													
65-40-200/11.0	11			64	63.8	63.7	63.6	63	63.2	62.7	62.6	62	61.3	60.5	59.2													
65-50-125/3.0	3			20.1	20	20	20	19.8	19.6	19.5	19.3	18.5	17.9	16.8	15.8	13	9.3											
65-50-125/4.0	4			25.3	25.2	25.2	25.2	25	24.8	24.5	24.5	23.8	23.2	22	20.8	18	14.1											
65-50-125/5.5	5.5			32	31.7	31.7	31.7	31.5	31.3	31.3	31.2	30.7	30.2	29.2	28.3	25	21.1											
65-50-160/7.5	7.5			35	34.8	35	35.3	35.3	35.5	35.5	35.8	35.7	35.5	34.8	34.2	32	29.3											
65-50-160/9.2	9.2			43	42.8	43	43.2	43.3	43.6	43.9	44	43.8	43.5	42.6	42	40	37											
65-50-200/11.0	11			51.2	51	51.3	51.6	51.7	51.7	51.7	51.8	51.4	51.2	50.3	50	48	45											
65-50-200/15.0	15			61	61.2	61.2	61.5	61.5	61.5	61.5	61.5	61.4	61.3	60.4	60	58	55.5	52										
65-50-200/18.5	18.5			68	68	68.2	68.3	68.2	68.6	68.6	69	69	69.2	68.6	68.9	68	65.4	62										
80-65-125/5.5	5.5														20.6	20	18.8	17.4	16.1	14.4	12.5	11	8.8					
80-65-125/7.5	7.5														24.5	23.7	22.9	22	20.9	19.5	18	15.8	14.4					
80-65-125/9.2	9.2														29	28.4	27.7	27	25.8	24.4	23	21.3	19.3	16.9				
80-65-160/11.0	11														34.3	33.5	32.5	31.6	30.6	29	27	24.7	22.9	20.5				
80-65-160/15.0	15														42.7	41.8	41	40.2	38.8	37.8	36	34.1	32.2	29.5				
80-65-200/18.5	18.5														52.2	51.6	50.8	49.2	47.7	46.3	45	43	40.9	38.9				
80-65-200/22.0	22														60.1	59.2	58.3	57	55.8	54.4	53	51.4	49.7	47.5				
80-65-200/30.0	30														73.7	73.3	73	72.1	70.7	69.5	68	66.8	65.5	64				
100-80-160/15.0	15															31.5	30.8	30	28.9	28.4	26.6	25.3	24.2	23.4	20	16.5	13.7	
100-80-160/18.5	18.5															35.9	35.2	34.8	33.8	33.1	31.8	31	29.6	28.6	26	23.5	20.3	
100-80-200/22.0	22															44.1	43	42.5	41.1	40.3	39.1	38.5	37.2	35.8	33	29.6	25.8	
100-80-200/30.0	30															56.5	55.5	55.2	54.1	52.7	52	50.6	49.3	48.7	45	42	39.1	
100-80-200/37.0	37															65.5	64.5	63.9	62.6	61.6	60	59	57.6	57	54	50.5	46.6	




50-32-160 50HZ

ISO2548 AnnexB

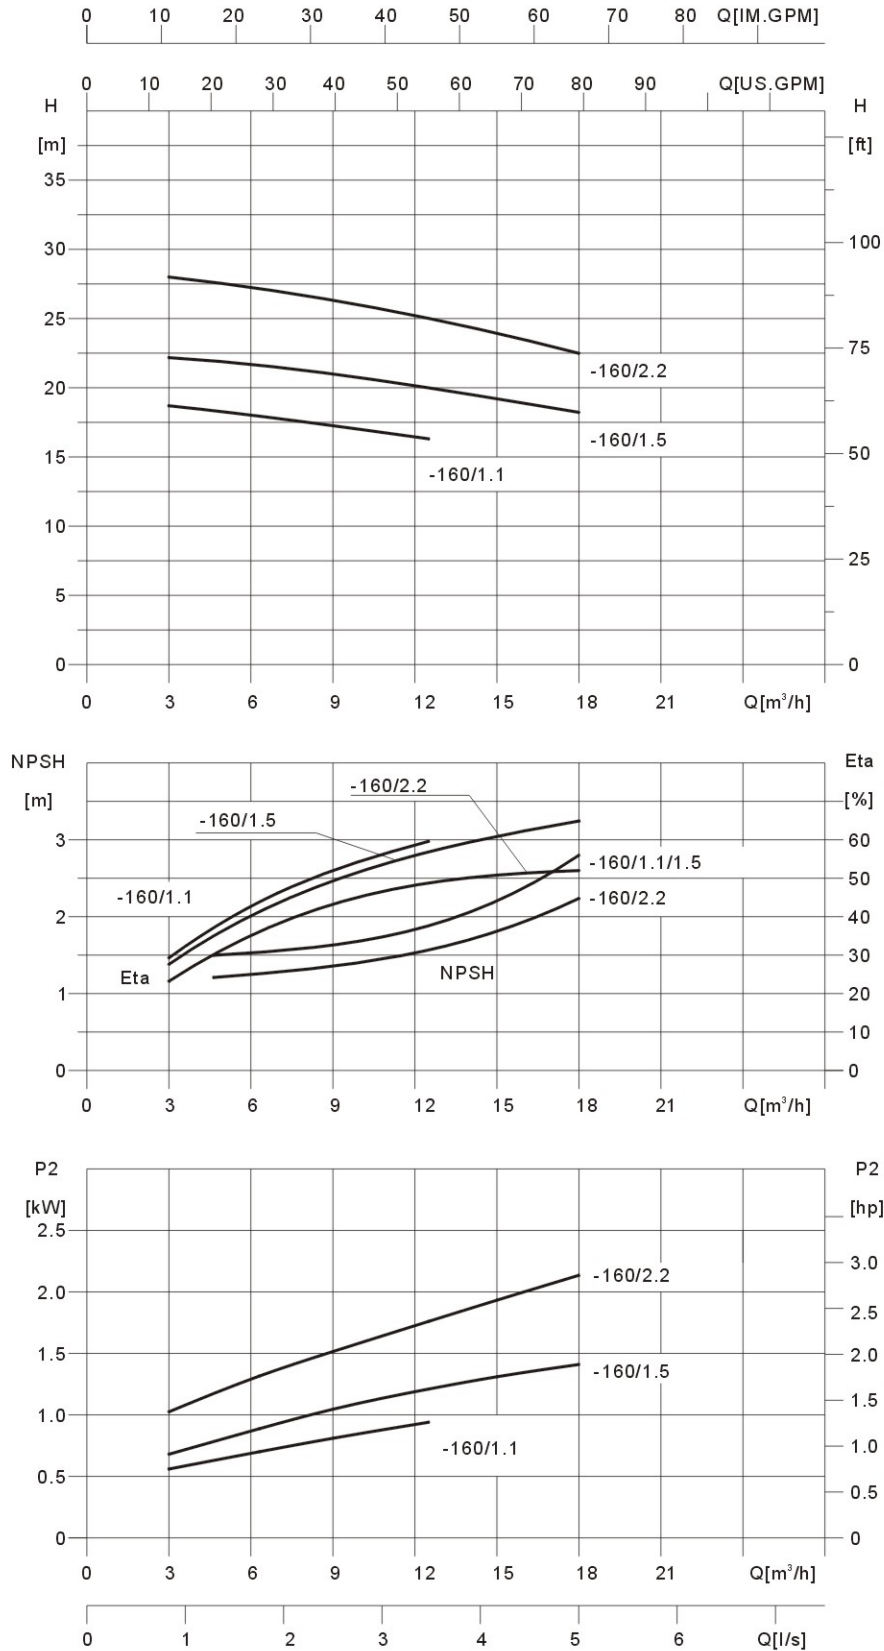




50-32-200 50HZ

ISO2548 AnnexB

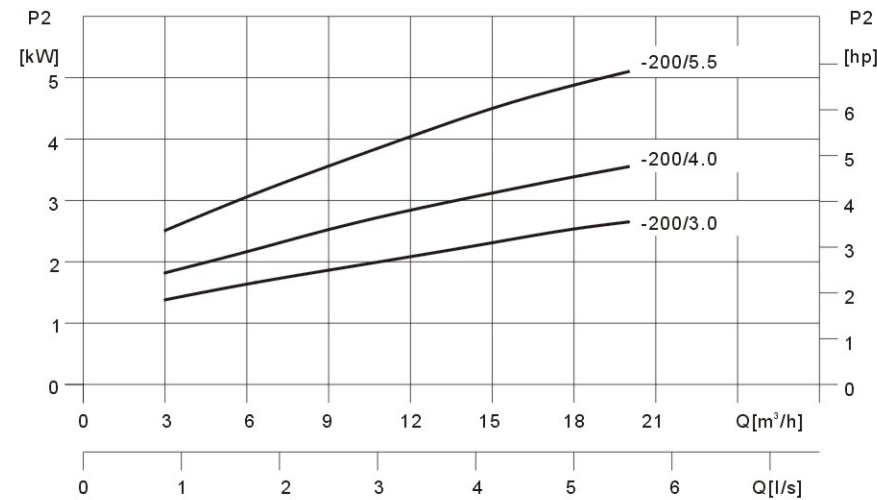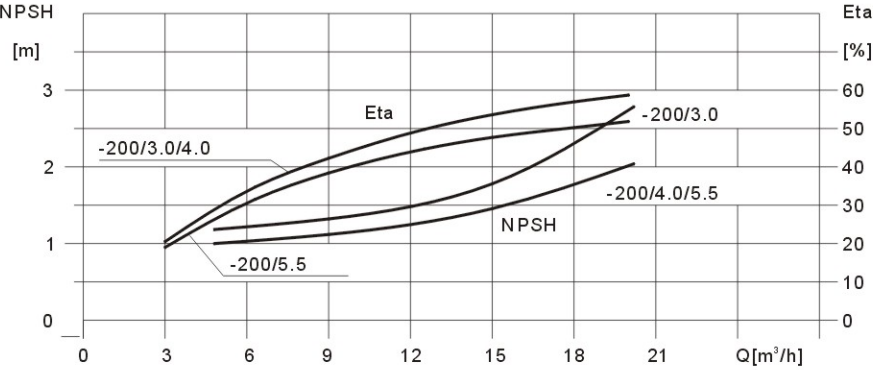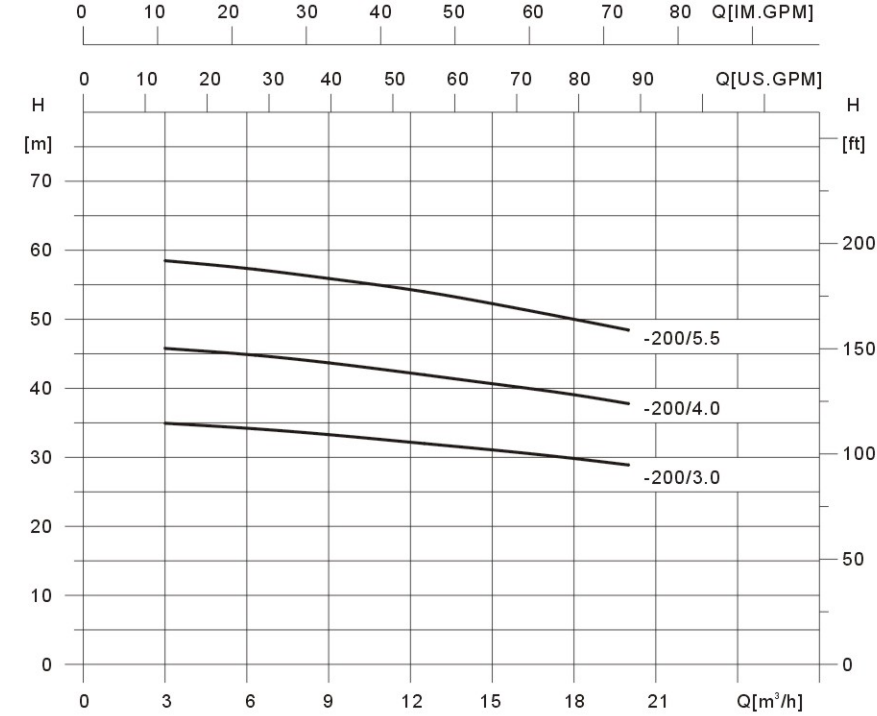


65-40-125 50HZ

ISO2548 AnnexB

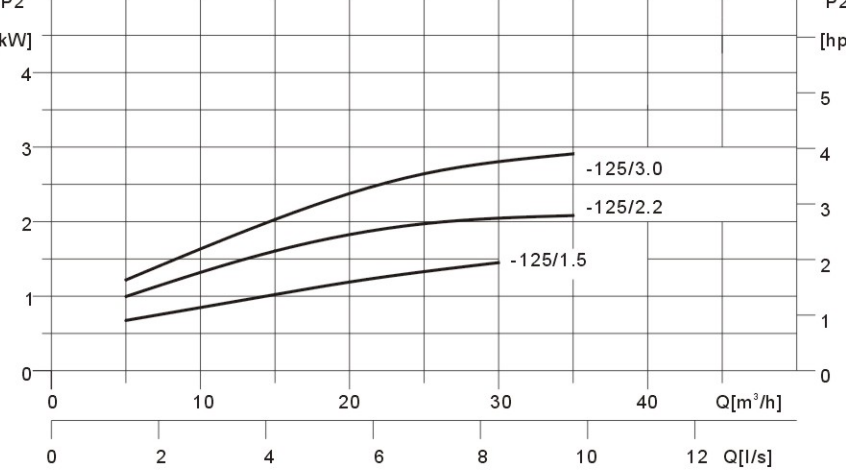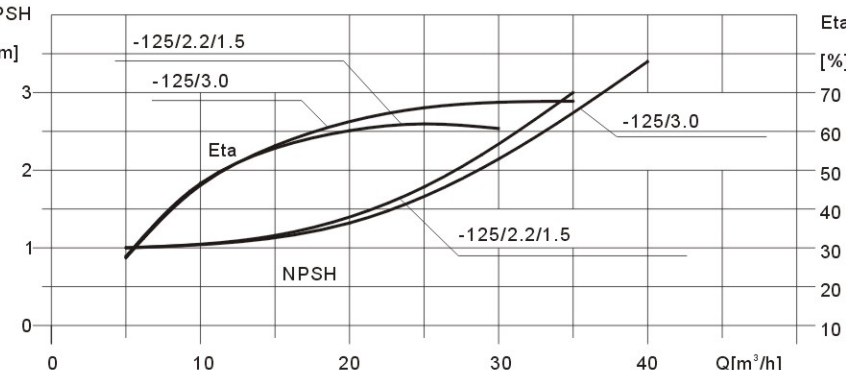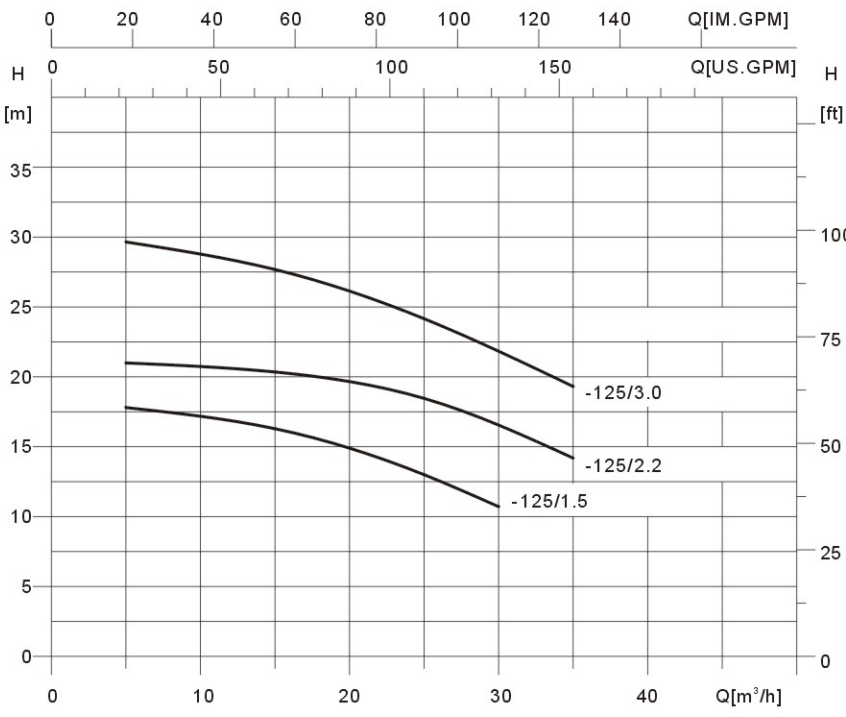


65-40-160 50HZ



ISO2548 AnnexB

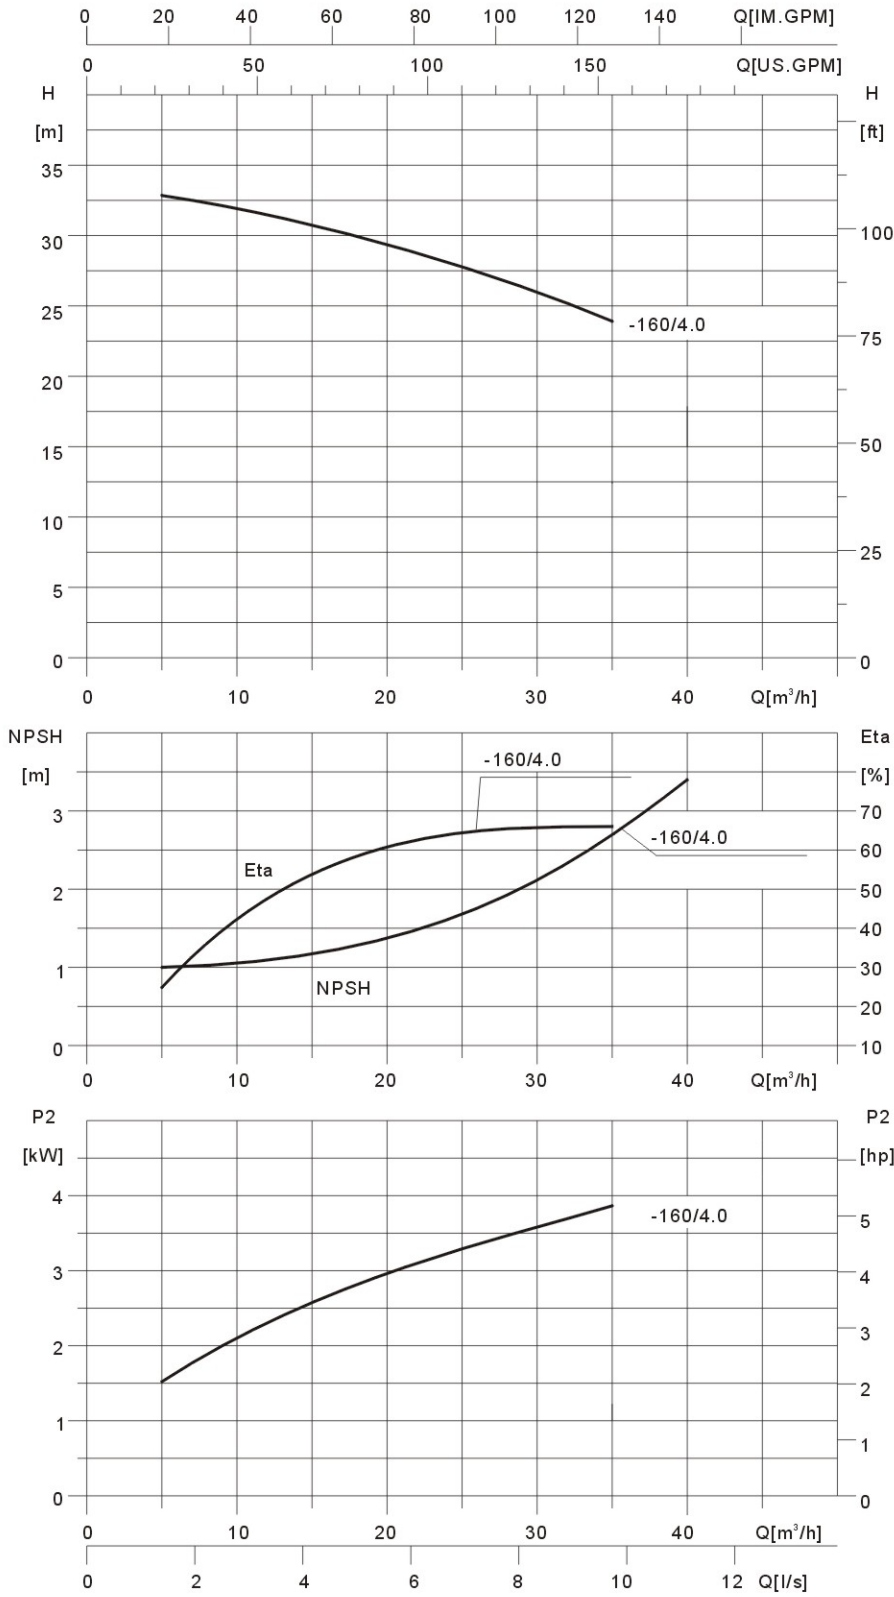

65-40-200 50HZ


ISO2548 AnnexB

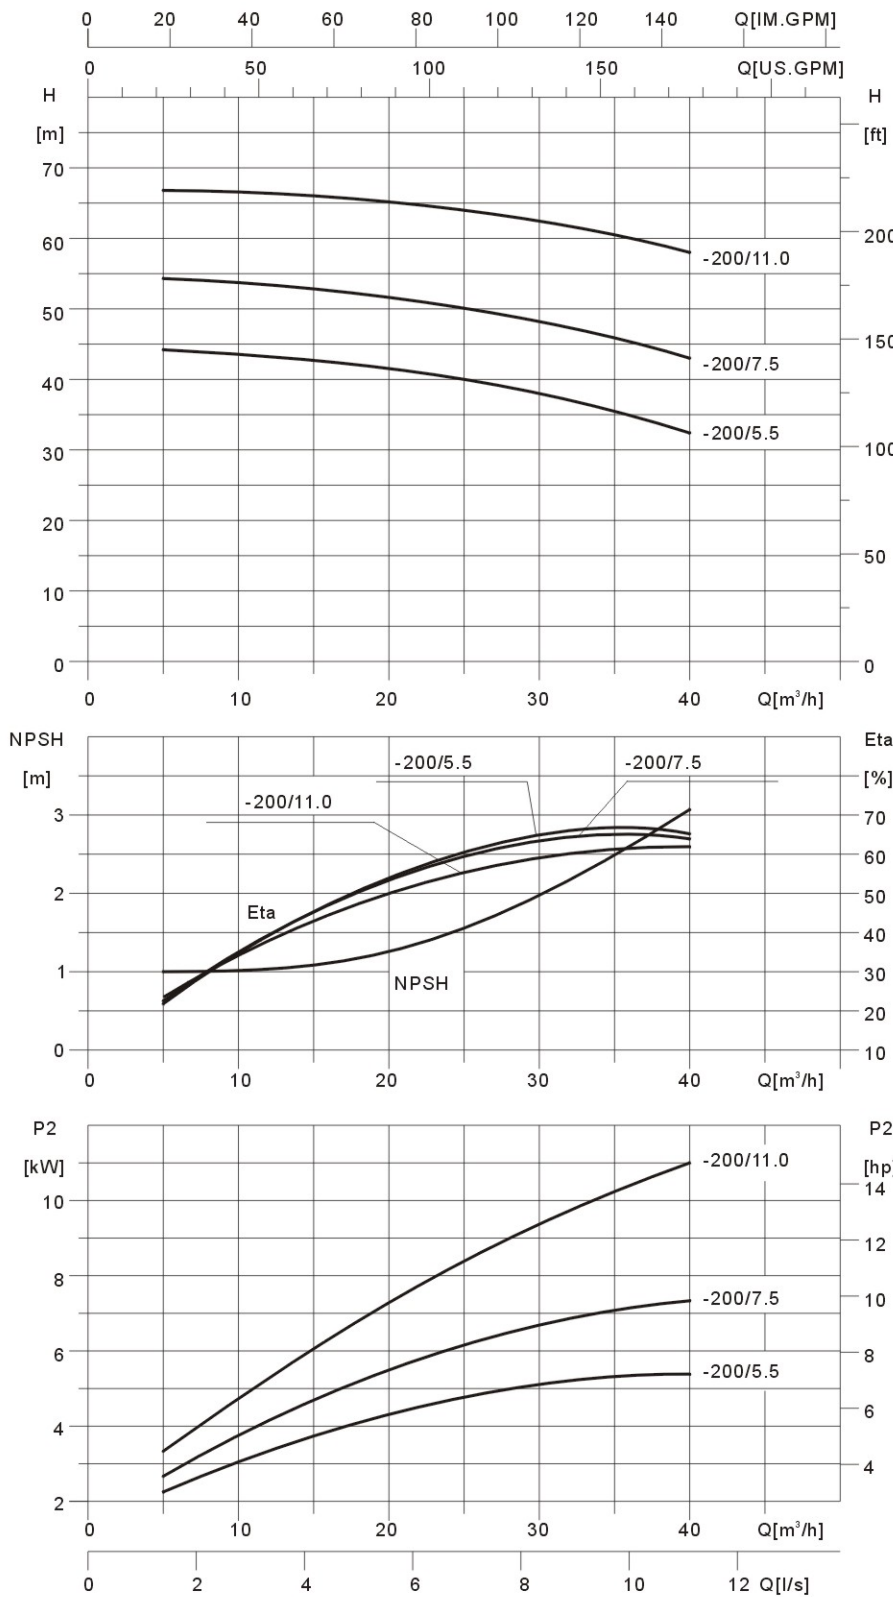

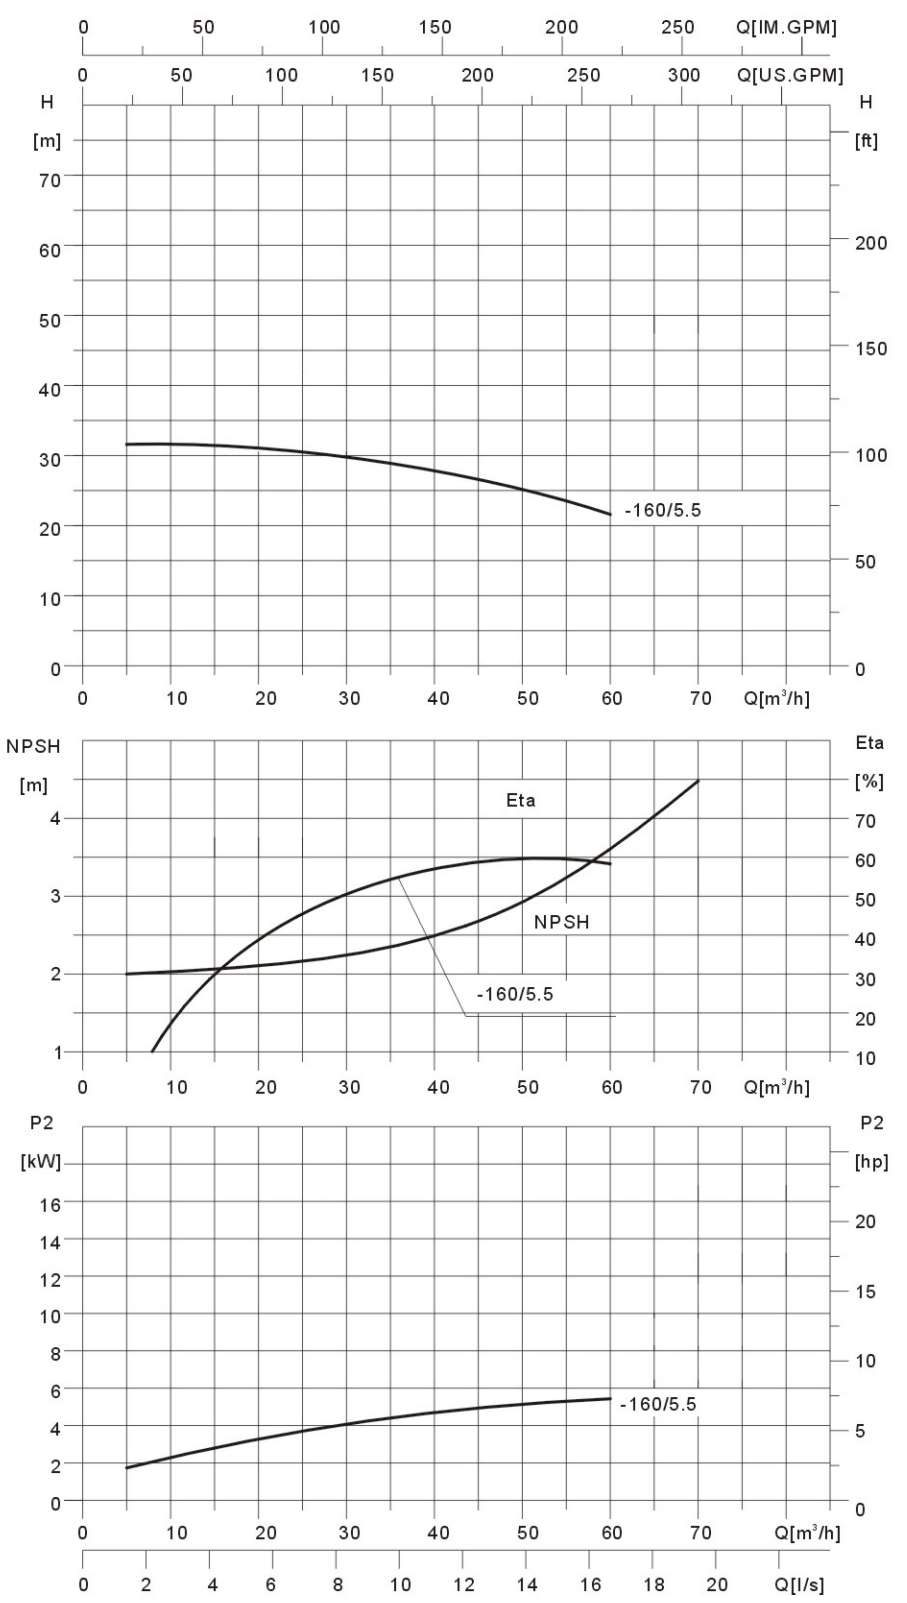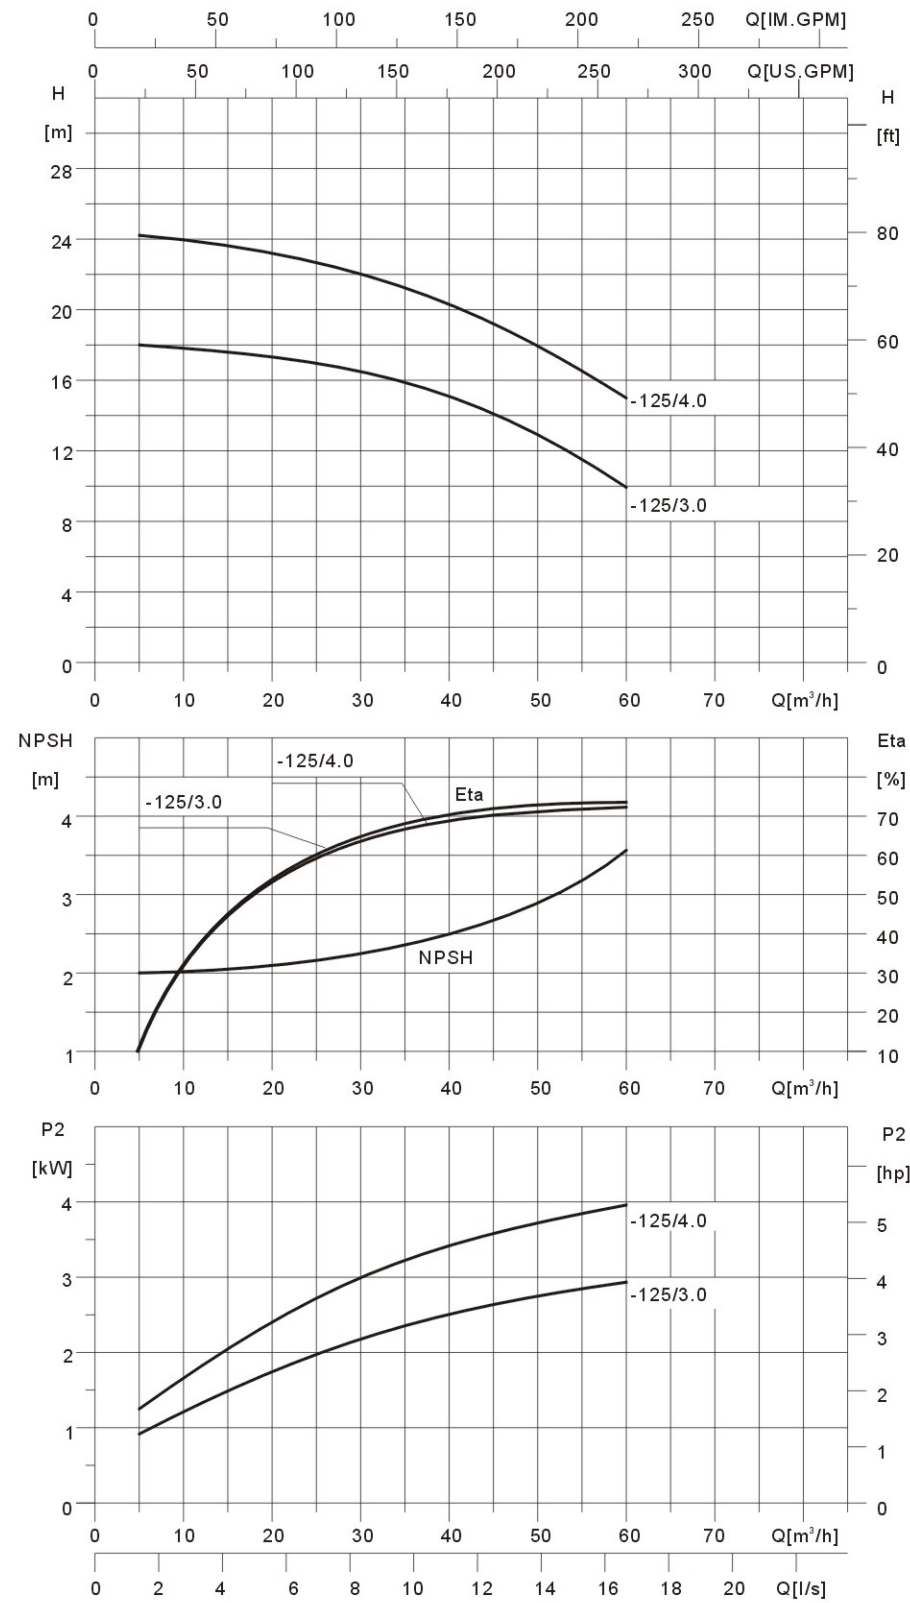


65-50-200 50HZ



ISO2548 AnnexB

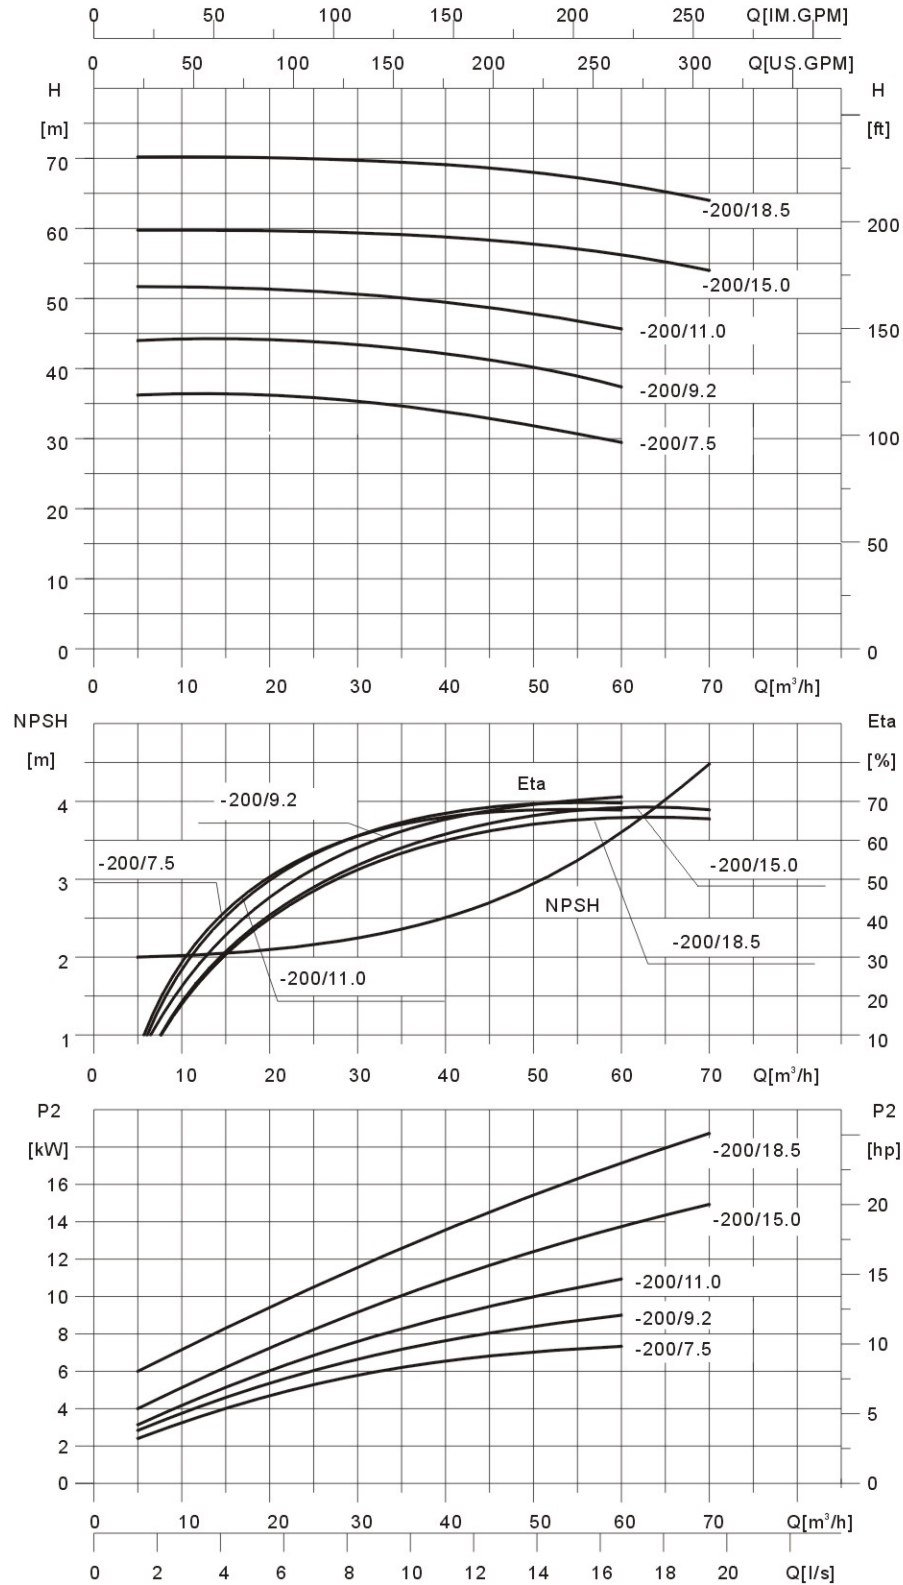

80-65-125 50HZ


ISO2548 AnnexB

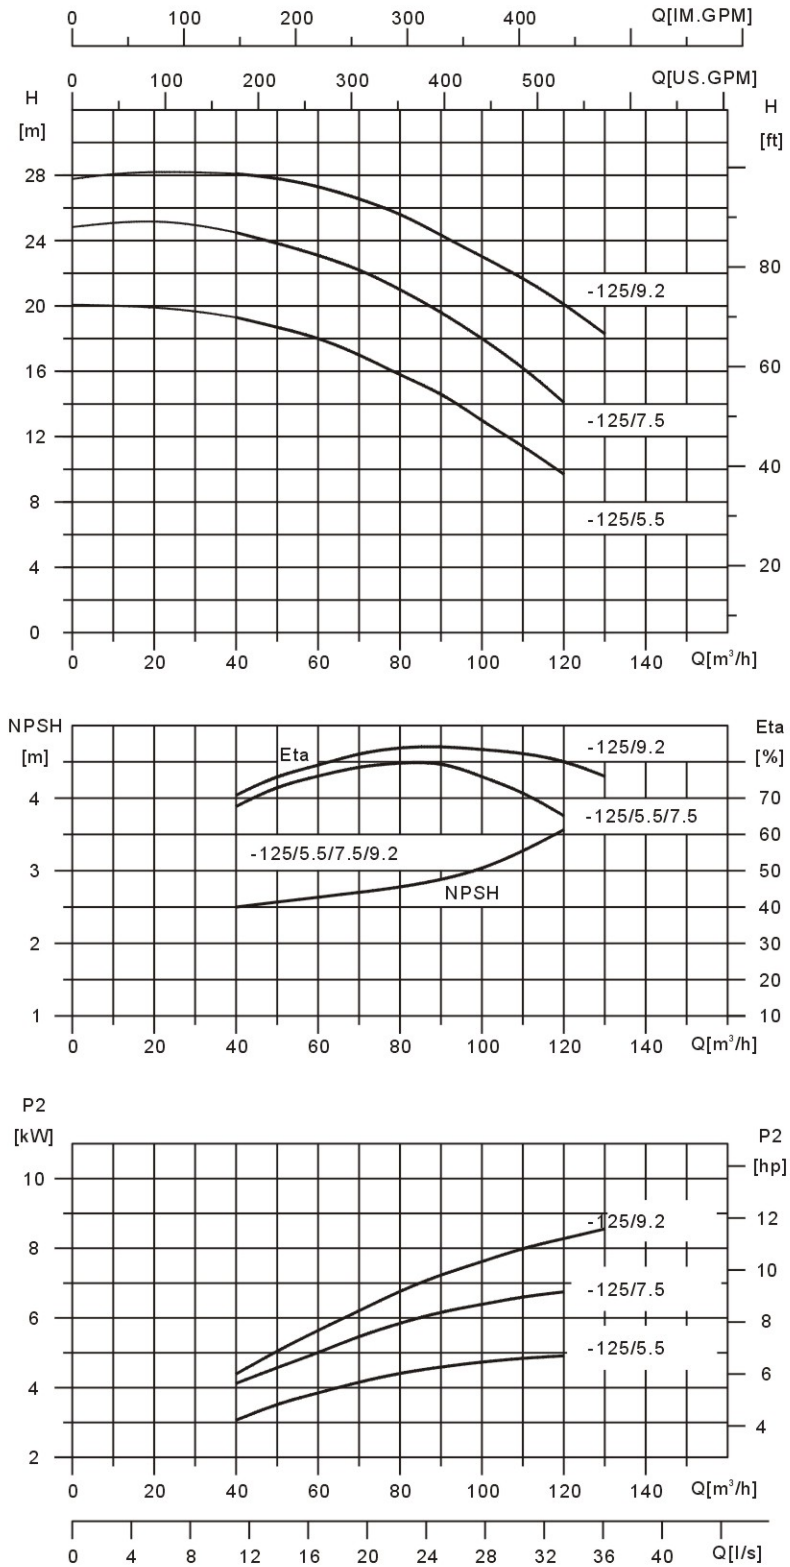

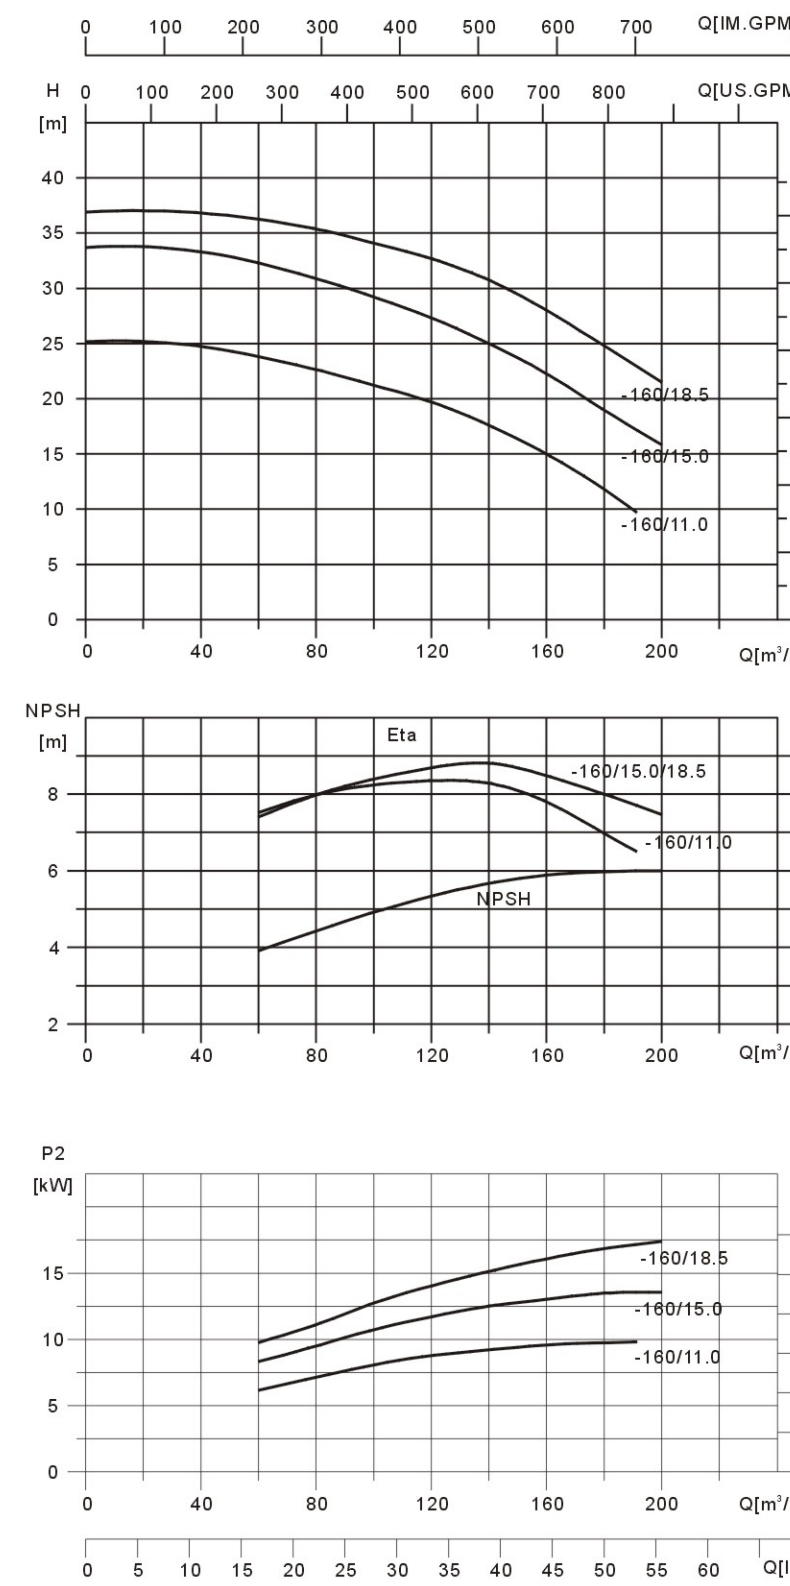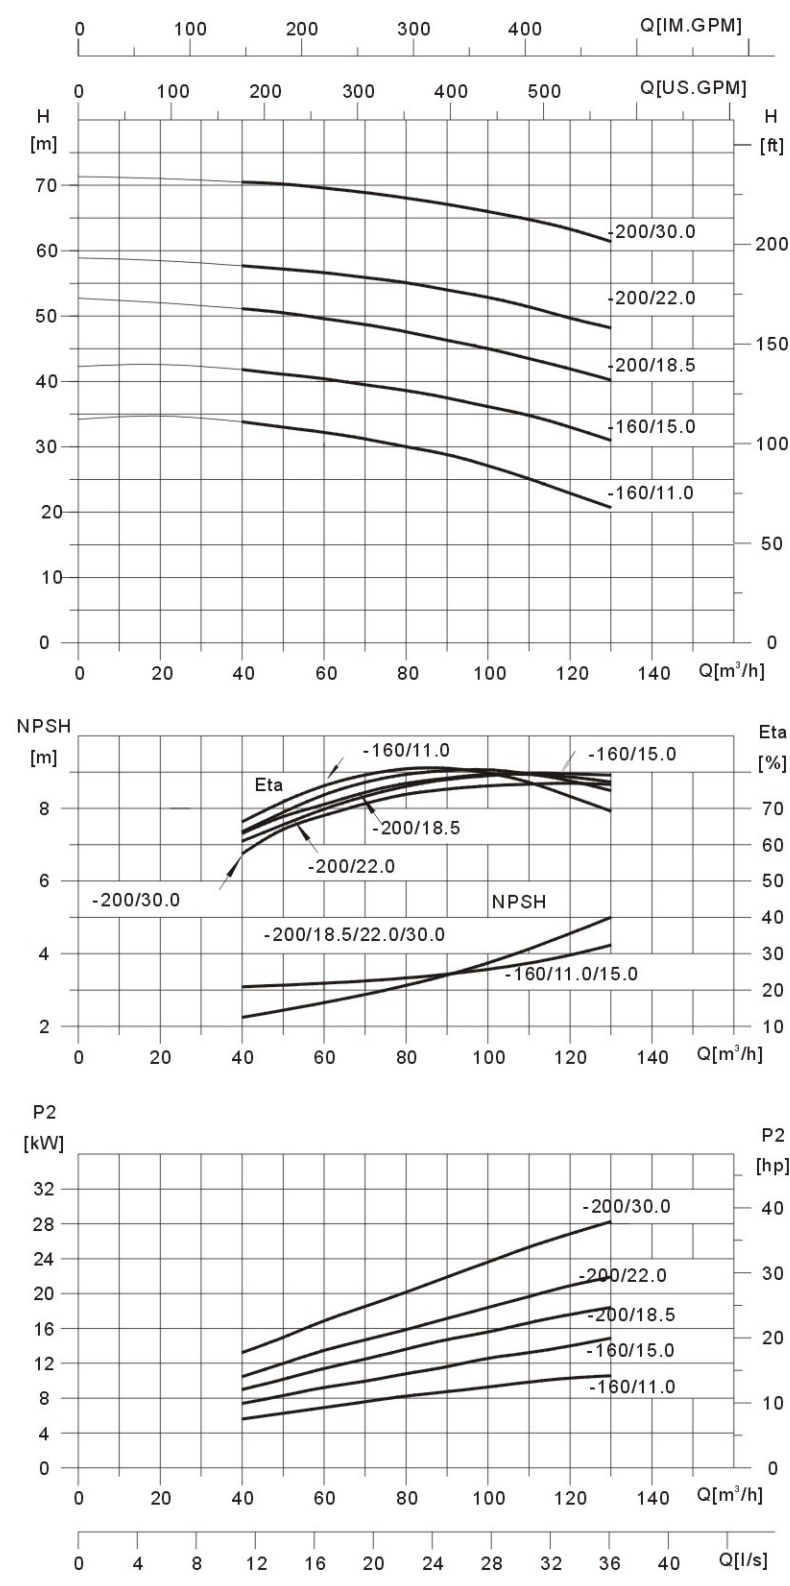

100-80-200 50HZ

ISO2548 AnnexB

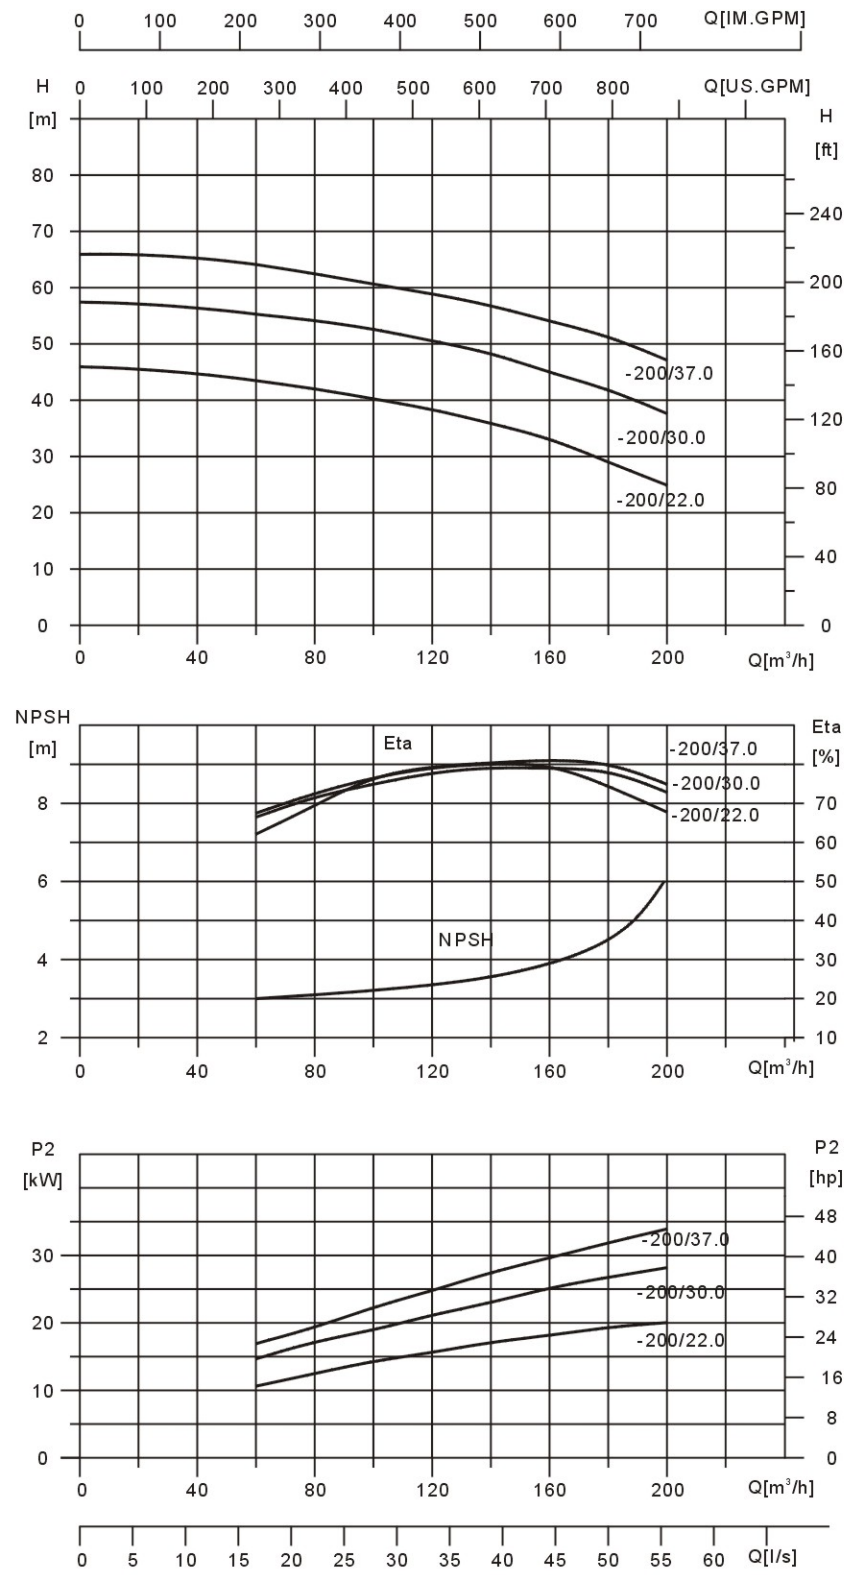

50-32-160 60HZ

ISO2548 AnnexB

