

PROJECT:	_____	UNIT TAG:	_____	QUANTITY:	_____
REPRESENTATIVE:	_____	TYPE OF SERVICE:	_____	DATE:	_____
ENGINEER:	_____	SUBMITTED BY:	_____	DATE:	_____
CONTRACTOR:	_____	APPROVED BY:	_____	DATE:	_____
	_____	ORDER NO.:	_____	DATE:	_____







CR 64-3

Vertical, multistage centrifugal pump with suction and discharge ports on the same level. The pump head and base are in cast iron. All other wetted parts are in stainless steel (EN 1.4301) (AISI 304)

Product photo could vary from the actual product

Conditions of Service	Pump Data	Motor Data
Flow: 298 US gpm	Max pressure at stated temperature: 232 psi / 250 °F	Rated power - P2: 40 HP
Head: 346.9 ft	Liquid temperature range: -22 .. 248 °F	Rated voltage: 230/460 V
Efficiency: _____	Maximum ambient temperature: 104 °F	Main frequency: 60 Hz
Liquid: Water	Approvals motor: UL Recognized Component, CSA	Insulation class: F
Temperature: 68 °F	Shaft seal: HQQE	Motor protection: NONE
NPSH required: 8.01 ft	Flange standard: ANSI	Motor type: BALDOR
Viscosity: _____	Pipe connection: 4"	
Specific Gravity: 1.000	Product number: 96770549	

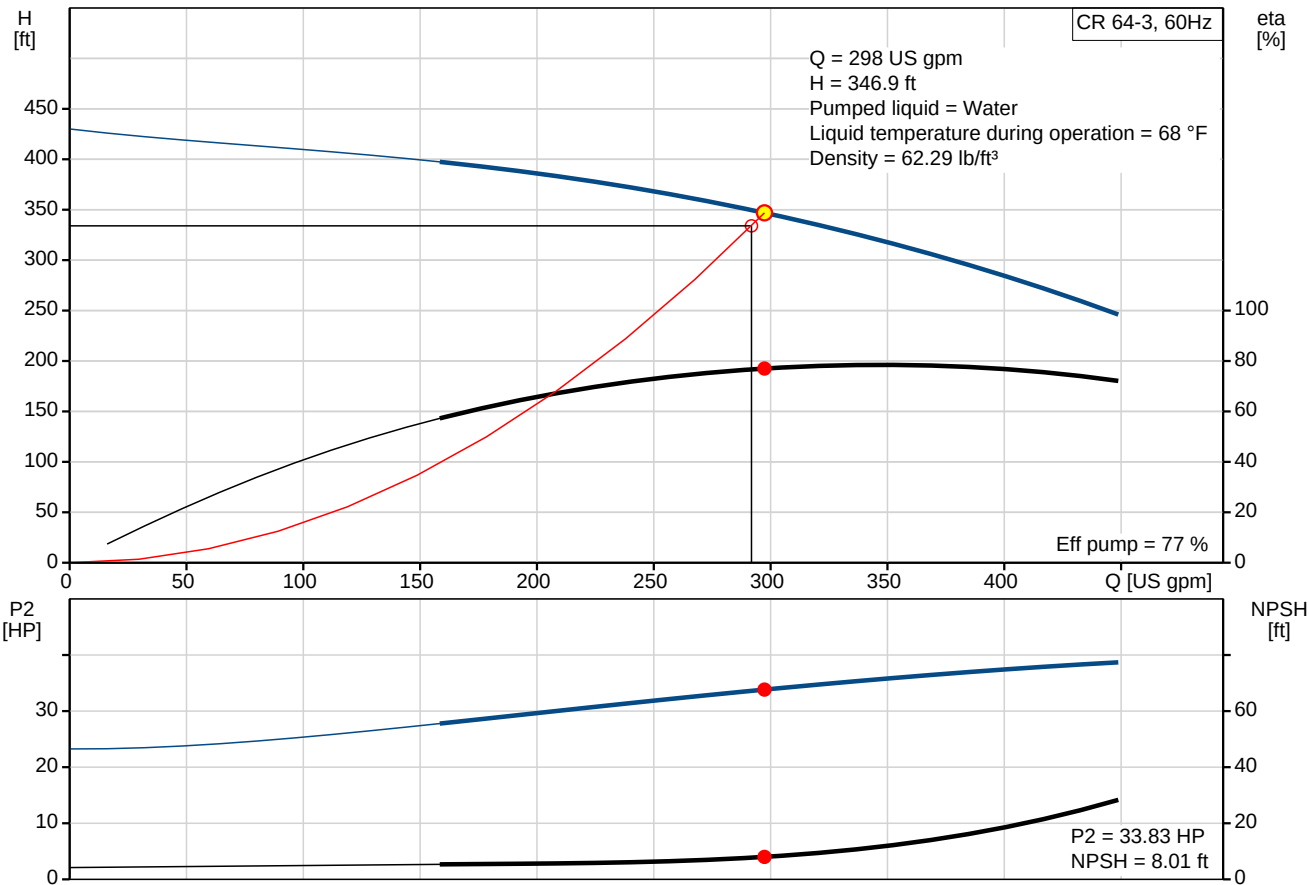

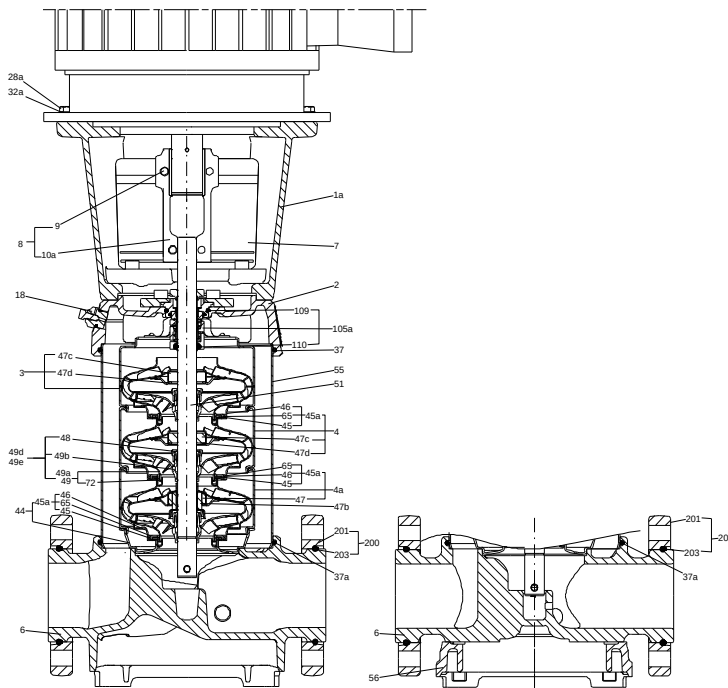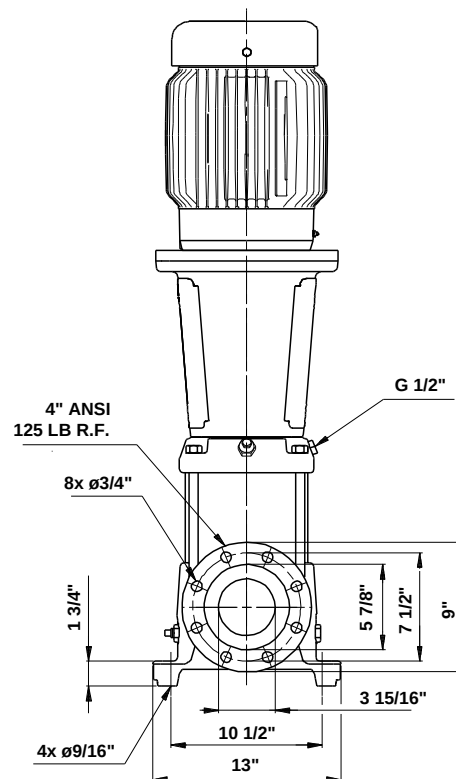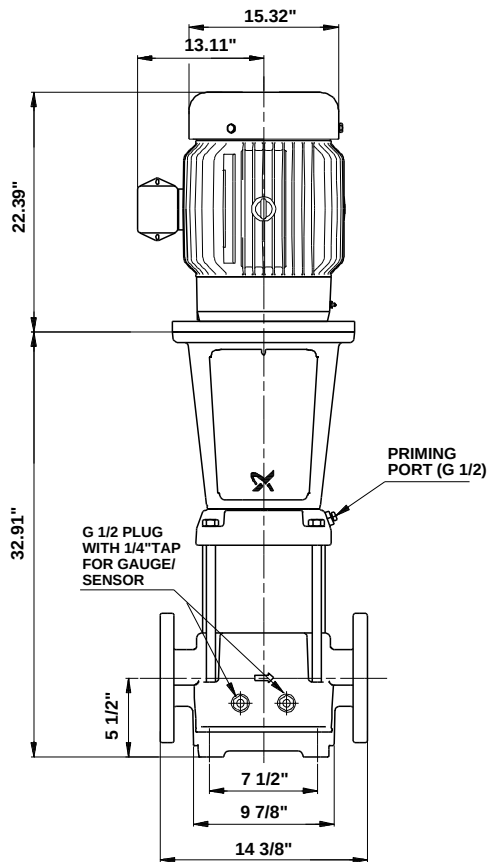

Materials:

Pump housing: Cast iron
EN-JS1050
ASTM 80-55-06

Impeller: Stainless steel
DIN W.-Nr. 1.4301
AISI 304

Material code: A
Code for rubber: E

Tender Text



Product photo could vary from the actual product

Product No.: [96770549](#)

CR 64-3 A-G-A-E-HQQE

Vertical, non-self-priming, multistage, in-line, centrifugal pump for installation in pipe systems and mounting on a foundation.

The pump has the following characteristics:

- Impellers and intermediate chambers are made of Stainless steel, DIN W.-Nr. 1.4301.
- Pump head and base are made of Cast iron.
- The shaft seal has assembly length according to EN 12756.
- Power transmission is via cast iron split coupling.
- Pipework connection is via ANSI flanges.

The motor is a 3-phase AC motor.

Liquid:

Pumped liquid: Water

Liquid temperature range: -22 .. 248 °F

Q_OpFluidTemp: 68 °F

Density: 62.29 lb/ft³

Technical:

Speed for pump data: 3525 rpm

Actual calculated flow: 298 US gpm

Resulting head of the pump: 346.9 ft

Primary shaft seal: HQQE

Approvals on motor nameplate: UL Recognized Component, CSA

Curve tolerance: ISO9906:2012 3B

Materials:

Pump housing: Cast iron

EN-JS1050

ASTM 80-55-06

Impeller: Stainless steel

DIN W.-Nr. 1.4301

AISI 304

Installation:

Maximum ambient temperature: 104 °F

Max pressure at stated temperature: 232 psi / 250 °F

Flange standard: ANSI

Pipe connection: 4"

Pressure stage: 125 Lb.



Company name:

Created by:

Phone:

Date:

3/21/2017

Flange size for motor: 324TC

Electrical data:

Motor type: BALDOR
Rated power - P2: 40 HP
Main frequency: 60 Hz
Rated voltage: 3 x 230/460 V
Service factor: 1,15
Rated current: 90/45 A
Rated speed: 3540 rpm
Insulation class (IEC 85): F

Others:

Net weight: 898 lb
Gross weight: 916 lb
Shipping volume: 32.8 ft³

Position	Count	Description
	1	CR 64-3 A-G-A-E-HQQE  Product photo could vary from the actual product Product No.: 96770549 Vertical, non-self-priming, multistage, in-line, centrifugal pump for installation in pipe systems and mounting on a foundation. The pump has the following characteristics: - Impellers and intermediate chambers are made of Stainless steel, DIN W.-Nr. 1.4301. - Pump head and base are made of Cast iron. - The shaft seal has assembly length according to EN 12756. - Power transmission is via cast iron split coupling. - Pipework connection is via ANSI flanges. The motor is a 3-phase AC motor. Liquid: Pumped liquid: Water Liquid temperature range: -22 .. 248 °F Q_OpFluidTemp: 68 °F Density: 62.29 lb/ft³ Technical: Speed for pump data: 3525 rpm Actual calculated flow: 298 US gpm Resulting head of the pump: 346.9 ft Primary shaft seal: HQQE Approvals on motor nameplate: UL Recognized Component, CSA Curve tolerance: ISO9906:2012 3B Materials: Pump housing: Cast iron EN-JS1050 ASTM 80-55-06 Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Installation: Maximum ambient temperature: 104 °F Max pressure at stated temperature: 232 psi / 250 °F Flange standard: ANSI Pipe connection: 4" Pressure stage: 125 Lb. Flange size for motor: 324TC



Company name:

Created by:


Phone:

Date:



3/21/2017

Position	Count	Description
		Electrical data: Motor type: BALDOR Rated power - P2: 40 HP Main frequency: 60 Hz Rated voltage: 3 x 230/460 V Service factor: 1,15 Rated current: 90/45 A Rated speed: 3540 rpm Insulation class (IEC 85): F Others: Net weight: 898 lb Gross weight: 916 lb Shipping volume: 32.8 ft ³

96770549 CR 64-3 60 Hz

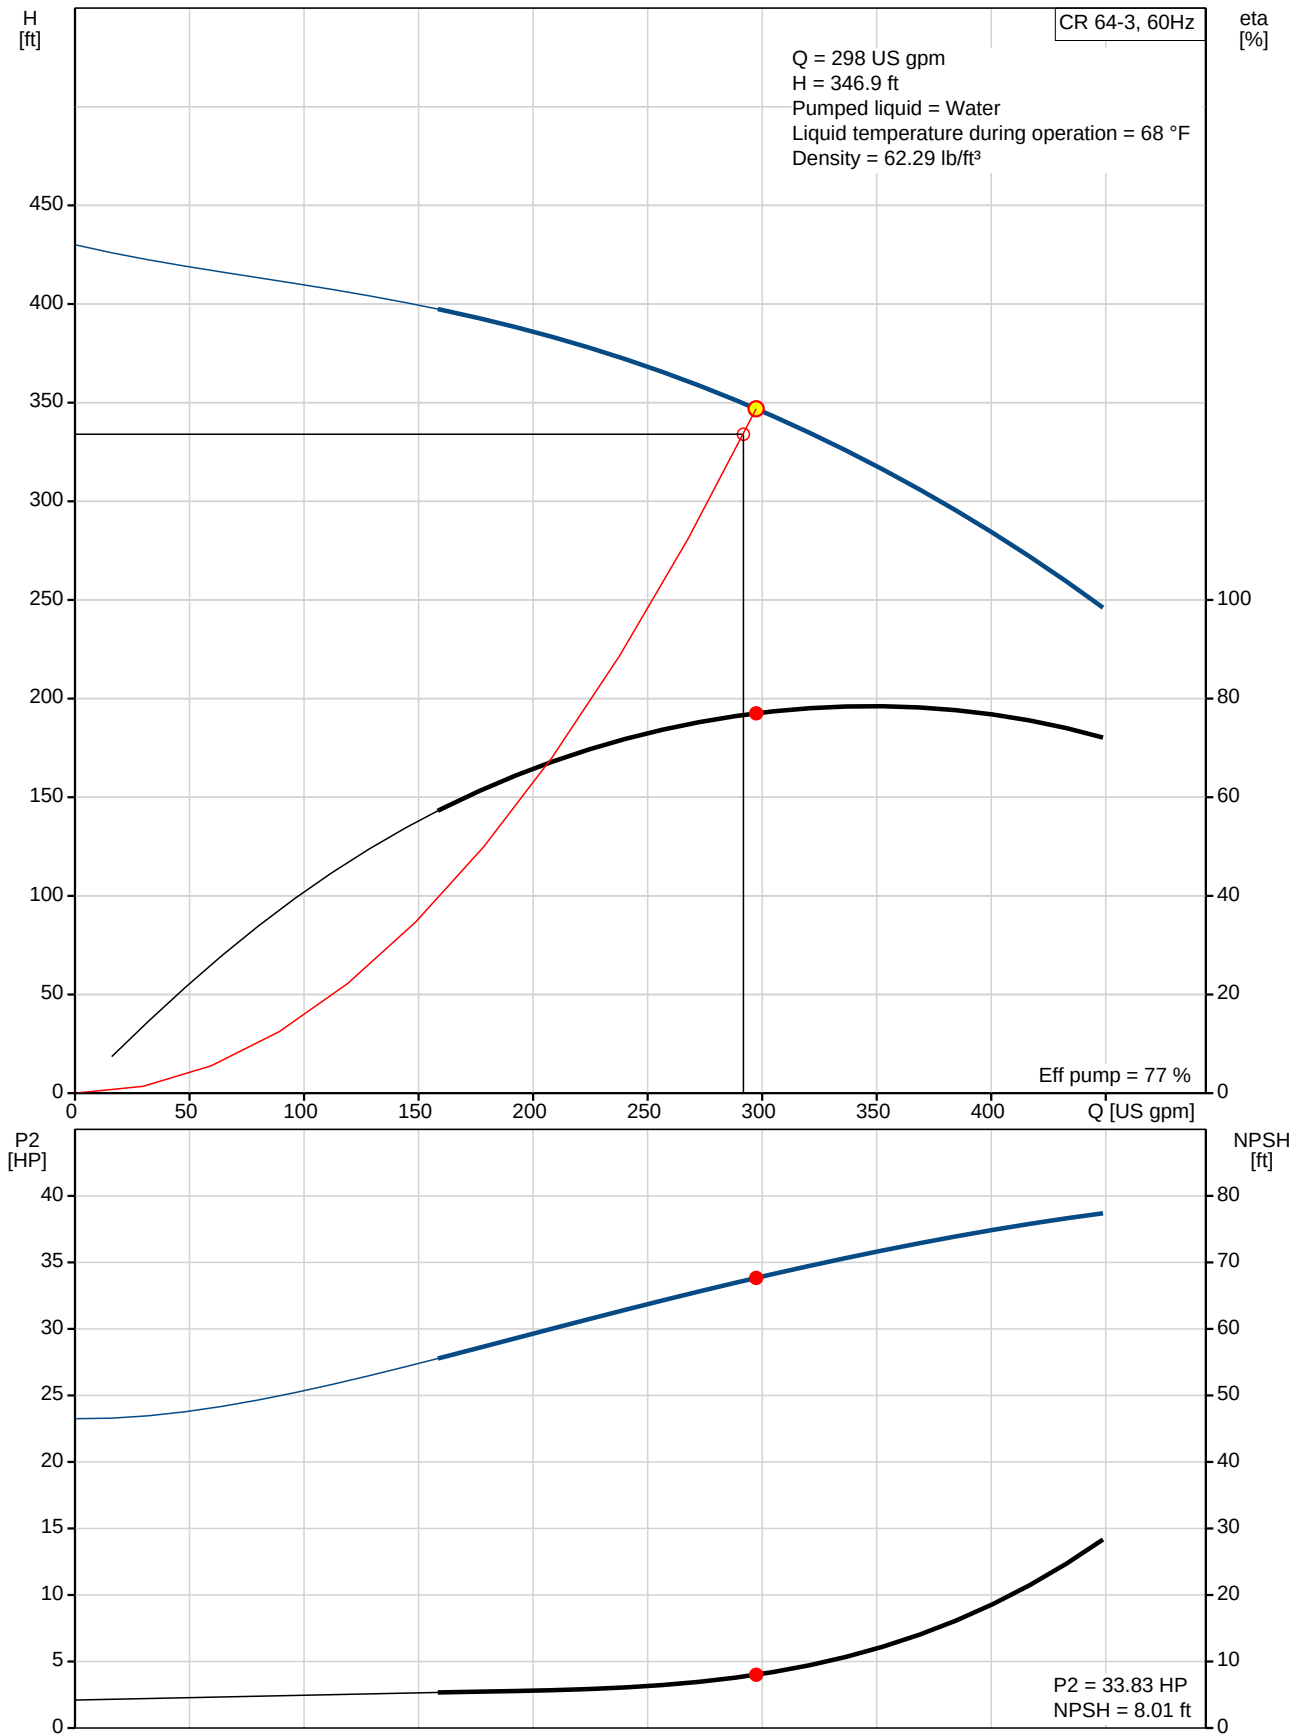

Description	Value
General information:	
Product name:	CR 64-3 A-G-A-E-HQQE
Product No.:	96770549
EAN:	5700839066493
Technical:	
Speed for pump data:	3525 rpm
Actual calculated flow:	298 US gpm
Resulting head of the pump:	346.9 ft
Head max:	428.8 ft
Impellers:	3
Primary shaft seal:	HQQE
Approvals on motor nameplate:	UL Recognized Component, CSA
Curve tolerance:	ISO9906:2012 3B
Stages:	3
Pump version:	A
Model:	B
Cooling:	TEFC
Materials:	
Pump housing:	Cast iron
	EN-JS1050
	ASTM 80-55-06
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Material code:	A
Code for rubber:	E
Installation:	
Maximum ambient temperature:	104 °F
Max pressure at stated temperature:	232 psi / 250 °F
Flange standard:	ANSI
Connect code:	G
Pipe connection:	4"
Pressure stage:	125 Lb.
Flange size for motor:	324TC
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-22 .. 248 °F
Q_OpFluidTemp:	68 °F
Density:	62.29 lb/ft³
Electrical data:	
Motor type:	BALDOR
Rated power - P2:	40 HP
Main frequency:	60 Hz
Rated voltage:	3 x 230/460 V
Service factor:	1,15
Rated current:	90/45 A
Load current:	102/51 A
Rated speed:	3540 rpm
Insulation class (IEC 85):	F
Motor protection:	NONE
Motor Number:	84Z03092
Others:	

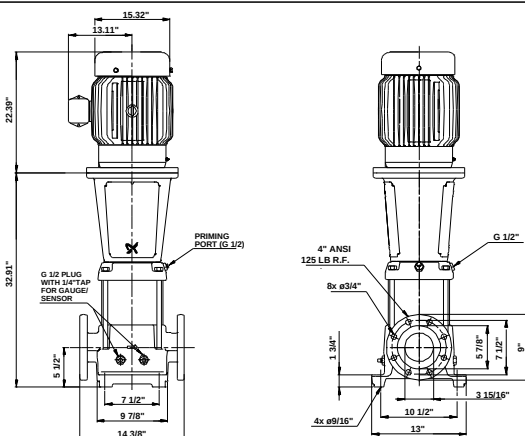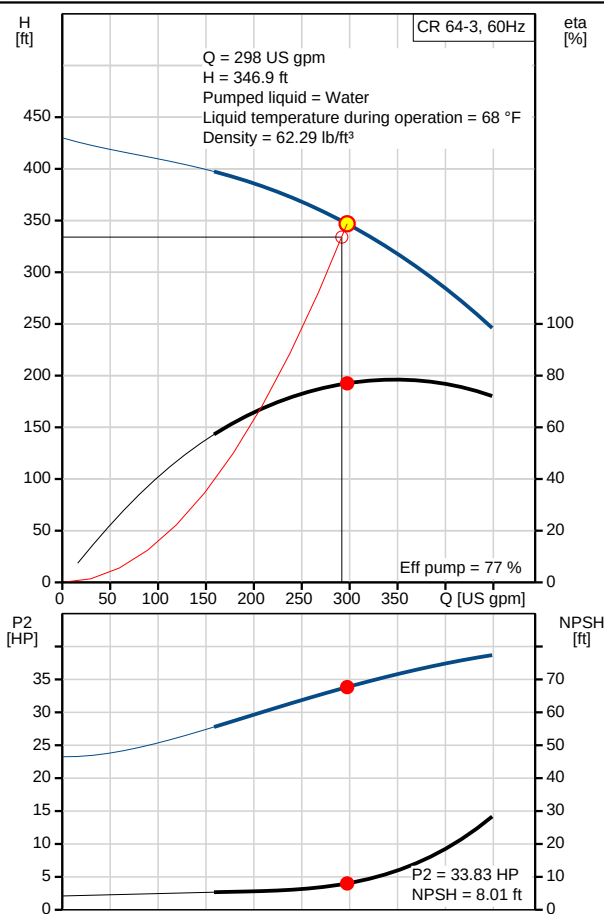



Company name:

Created by:



Phone:

Date:

3/21/2017

Description	Value
Net weight:	898 lb
Gross weight:	916 lb
Shipping volume:	32.8 ft ³
Sales region:	Namreg

96770549 CR 64-3 60 Hz

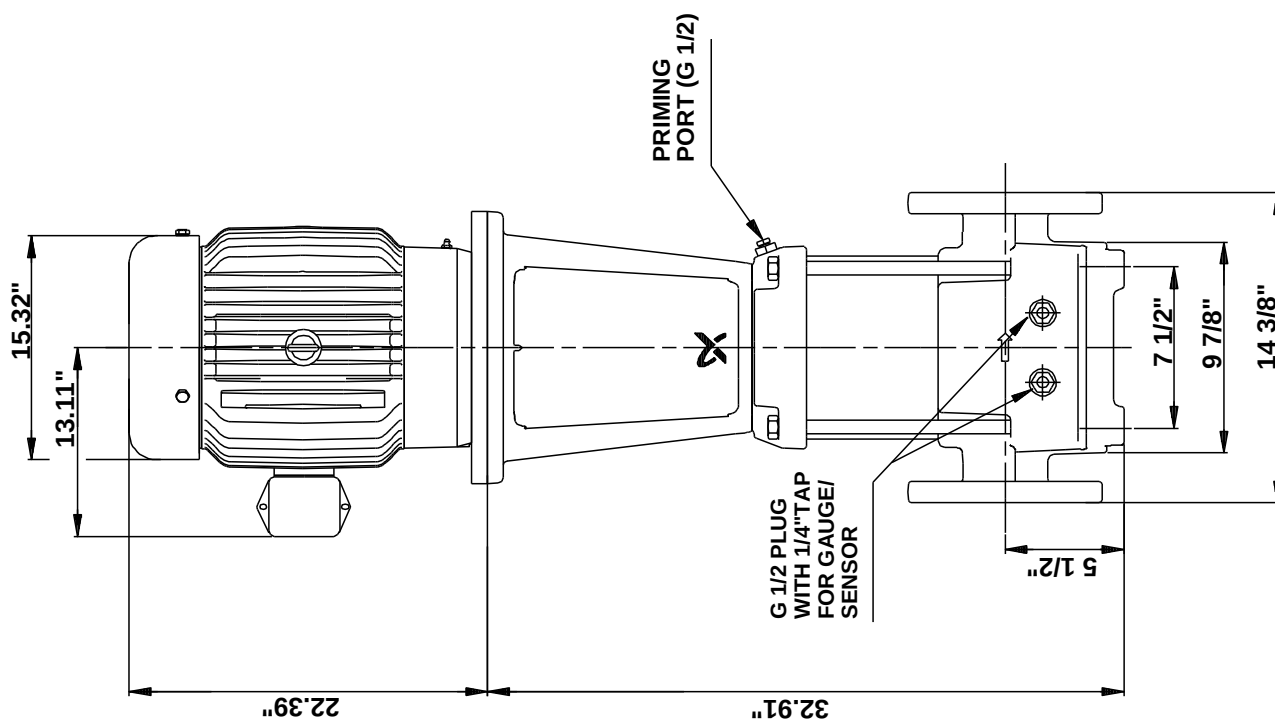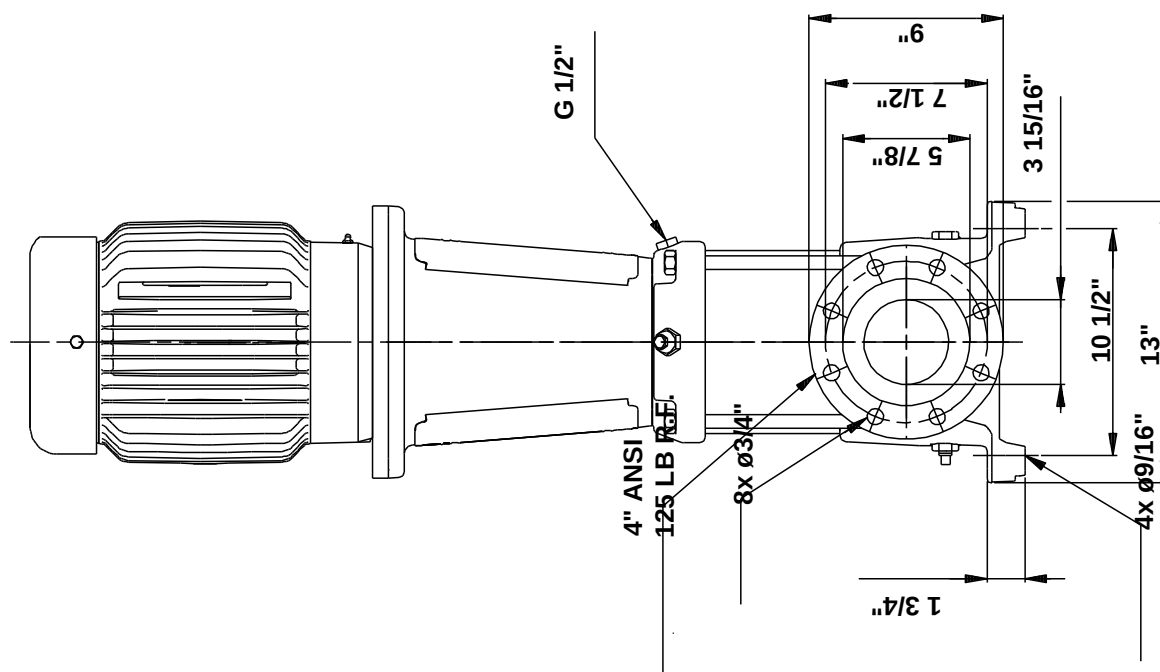

Note! All units are in [mm] unless otherwise stated.
Disclaimer: This simplified dimensional drawing does not show all details.