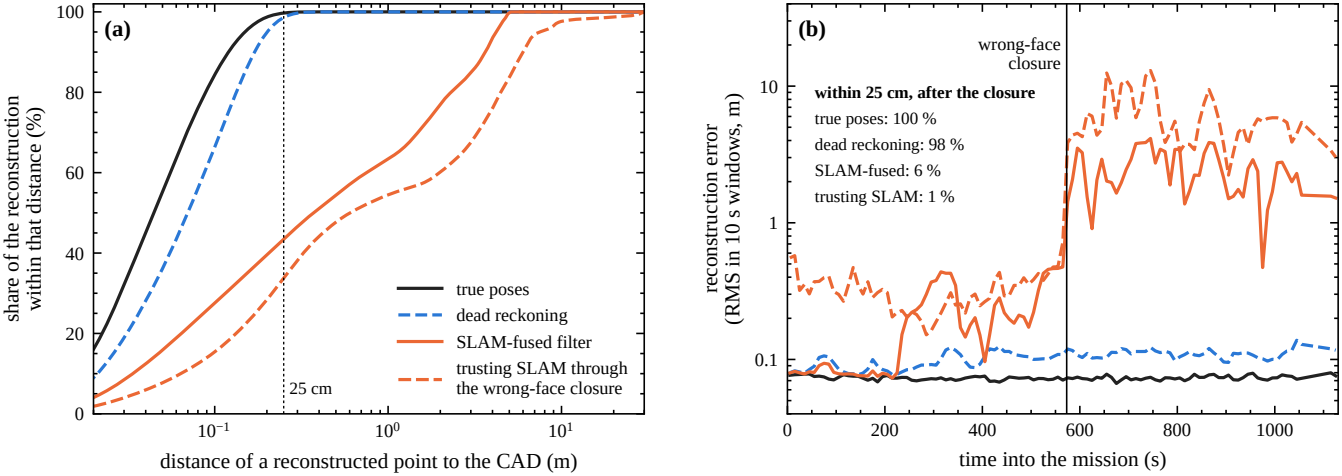
(a)
share of the reconstruction within that distance (%)
distance of a reconstructed point to the CAD (m)
true poses
dead reckoning
SLAM-fused filter
trusting SLAM through the wrong-face closure
25 cm
(b)
reconstruction error (RMS in 10 s windows, m)
time into the mission (s)
wrong-face closure
within 25 cm, after the closure
true poses: 100 %
dead reckoning: 98 %
SLAM-fused: 6 %
trusting SLAM: 1 %