



About Us

We specialize in durable and efficient sheet metal solutions tailored to meet industrial demands.

Our Vision

To deliver innovative products with superior quality and unmatched customer support.



HYDRO MECH ENGINEERS

We are a young sheet metal company to provide sheet metal solutions with strong vision to deliver reliable and economical sheet metal solutions.

We take pride in the quality of our machines, and the service we provide, we use high quality materials and components to ensure that our machines are reliable and long lasting.

We are devoted to develop manufacturing of high quality machines and press brake tools for sheet metal solutions.

We will continue improving products, quality and specifications of the products to provide the best to all clients.

with an excellent after sales support in HYDRO MECH, We maintain frequent contact with customers to address their requirements and build long- term relationships.

OUR PRODUCTS



Hydraulic Bus Bar
Processing Machines



Hydraulic C frame & H
frame Machines



Hydraulic Clinching
Machines



Hydro Mechanical Sheet
Rolling Machines



Hydraulic Section Bending
Machines



CNC Press Brake
Tools



Bus Bar Processing Machine



HMB-303/303

(Max 16T X W200- Punching, Bending)



(Max 12T X W200-Cutting)

Specification Model: HMB-303/303



HMB-303M	Capacity	Material	Thickness x width	Stroke	Motor
	Punching	Copper	ø 18 x 16T	60 mm	5 HP
		Aluminum	ø 20 x 16T		
	Bending	Copper	12T x W200mm	80 mm	
		Aluminum	16T x W200mm		
	Shearing	Copper	12T x W200mm	40 mm	
Aluminum		16T x W200mm			
HMB-303C	Capacity	Material	Thickness x width	Stroke	Motor
	Punching	Copper	ø 20 x 16T	60 mm	5 HP
		Aluminum	ø 20 x 16T		
	Bending	Copper	16T x W200mm	80 mm	
		Aluminum	16T x W200mm		
	Shearing	Copper	16T x W200mm	40 mm	5 HP
Aluminum		16T x W200mm			

Model: HMB-303M/303NC

Bus Bar Cutting

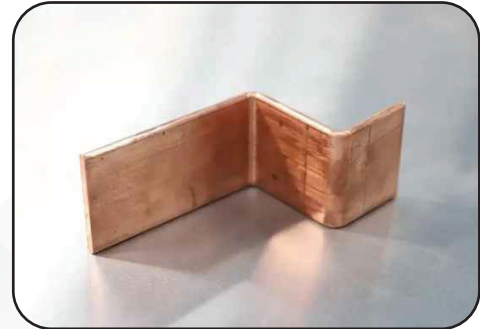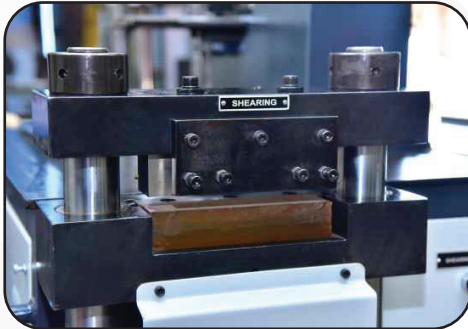

Bus Bar Bending

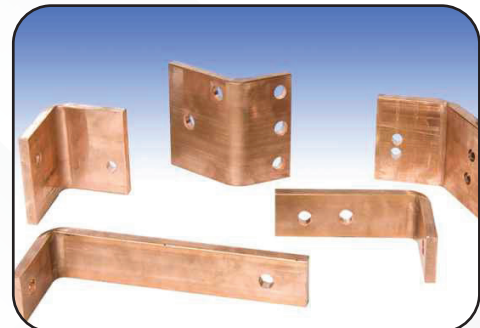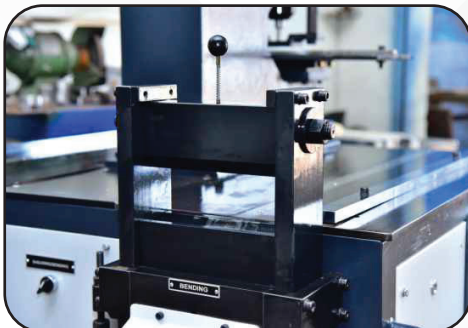

Accurate Punching



Dia	A	B
7	9	2
9	10	15
12	12	18
14		

Bus Bar Processing Machine.

These Series of Bus Bar Processing Machine are designed to give effective solution for Punching, Bending and Cutting of Bus Bars. Easy to adjust each unit to shorten the time and improve the production efficiency. This unit is easy and quick to do all the processing of Copper and Aluminum Bus Bar such as shearing, punching and bending. Easy to move and maintain the machine.

Features – 303M

- Squaring arm for shearing and bending station.
- Fine Stroke Manual adjustment for bending station.
- Manual Gauge Stopper for punching station with faster working speed than the existing.

Features – 303NC

- Fine Adjusting Squaring arm for Bending & Shearing Station.
- Vertical axis based on Bus bar size (width).
- Bending angle is numerically controlled by Digital input unit (NC).



HM-BM20 (MAX 16T X W200- Punching)

This is a compact and portable Bus Bar Bending machine designed for user-friendly operation with better controls.

- Speedy and accurate bends.
- Inexpensive tooling.
- Stroke control on punch movement for pre-set degree of bend.
- Easy and simple to move and maintain the machine due to compact and light weight
- Machines with low maintenance requirement.

Specification: HM-BM20

Capacity	Material	Thickness x width	Cylinder Stroke	Motor
Bending	Copper	10T x W200mm	80mm	2HP
	Aluminum	14T x W200mm		



HM-PM20 (MAX 16T X Ø16- Punching)

This is a compact and portable Bus Bar Punching machine designed for user-friendly operation with better controls.

- Speedy and accurate Punch.
- Inexpensive tooling.
- Machines with low maintenance requirement.
- Manual gauge bar stoppers for positioning

Specification: HM- PM20

Capacity	Material	Thickness x width	Cylinder Stroke	Motor
Bending	Copper	Ø14 X 12T	60mm	2HP
	Aluminum	Ø16 X 14T		



HM-640 (Max 6mm -Fastener Insertion Machine)



HM- 640 Feature:

- Hydraulic Force 53KN
- Energy Efficiency of hydraulic system ensures the force repeatability $\pm 2\%$
- Safety protection system
- Throat Depth 450mm
- Positive stop function is standard with machine
- Ultrasonically & tensile tested IS: 2062 Grade steel C-frame Structure
- ensures the rigidity & avoids deflection
- Fastener insertion capacity below M8 of steel

Specifications: HM-640

Drive Model	Hydraulic
Output Pressure	0.5-4T
Throat Depth	400mm
Safety Protection	Yes
Clinching Capacity	6mm Nut
Motor	3 HP
Holding Time	1-5S
Open Height	250mm
Anti Rotation Die	Yes
Dimension	(L W H) 950mm X 950mm X 2000mm



Electric Slip Rolling Machine



HM-SR 312 / 315

Features:

- It's easy to operated for thin steel sheet bending
- Motor driven for bending
- The upper roller can be moved up and down in manual to discharge the workpiece.
- Asymmetrical roll bending machine with 3rolls
- High strength steel rolls
- Fixed top roller, adjustable lower and rear rollers
- Worm gear and motor for pre-bending
- Quick release top roller

Model	Max Rolling Thick	Max Rolling Width	Roll Diameter	Min Rolling Diameter	Motor
HM-SR212	2mm	1200mm	90mm	110mm	2HP
HM-SR312	3mm	1200mm	100mm	120mm	3HP
HM-SR315	3mm	1500mm	115mm	145mm	3HP

Hydraulic Three Roll Pipe Rolling Machine



HM-SB50H

(Max50ø x3mmPipe) (Max 10mmxW50-Flat)

Features:

- Horizontal And Vertical Operation (For Hv Series)
- Standard Roll Set.
- Manual Adjustment Ofupperroll.
- Foot Switch Control/reverse Forwardstarter.
- Hardened Rolls For standard profile.
- Easy & Quick Roll Change.
- Scale For Clear Adjustment Of top roll.
- Hardened & Grinded shafts.
- All Shafts Runs In Roller Bearing.
- The Machine Frame Is Weldedsteel Construction.
- Machine Can Be Operatedbysemi-skilled Or Unskilled Operator

Specifications:

Model	Round Pipe	Square Pipe	Rectangular Pipe	Angle	Flat Bar	Motor
HM-SB50	Ø50 X3mm	50x50 x3mm	60 x 40 x3mm	50x5mm	50x10mm	3HP
HM-SB50	Ø50X3mm	50x50 x3mm	60 x40 x3mm	50 x 5mm	50x10mm	3HP&1HP
HM-SB75	Ø75x5mm	75x75 x5mm	80 x60 x5mm	50x6mm	60x10mm	5HP&1HP



 Address :

#10, 1st Main, 1st Cross, Doddanekundi Industrial Area, Opp to NGEF
Ancillary, Mahadevapura Post Bangalore - 560 048.

 Email : hydromechengineer@gmail.com

 Phone no. : +91 973 837 1651

 Website - www.hydromech.co.in