

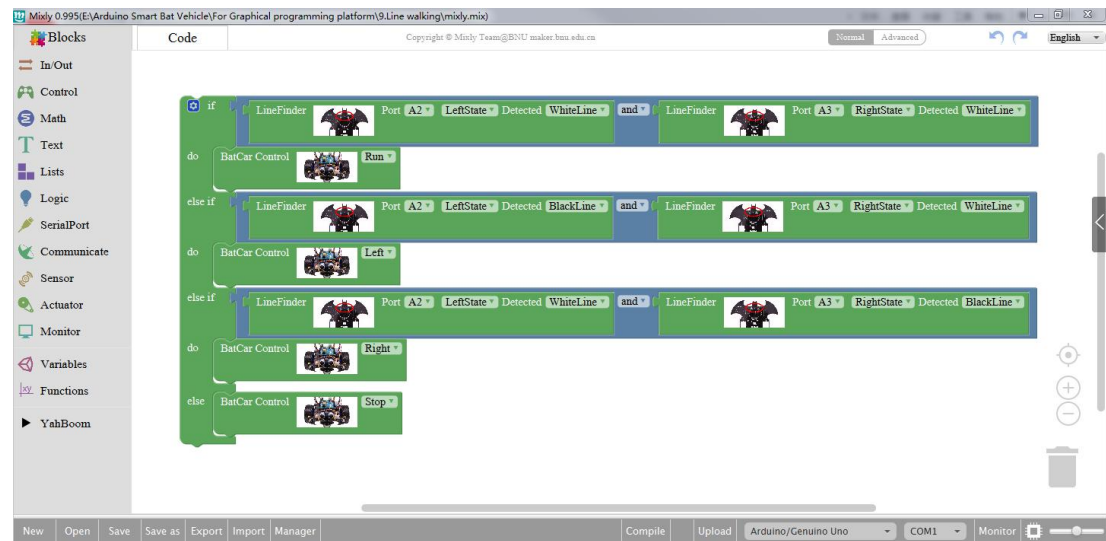



9.Line walking

Follow this picture to connect the modules:

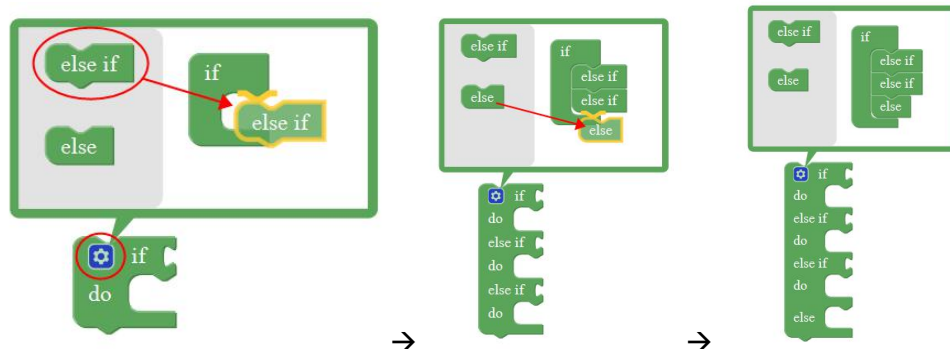

1.Modules of experiment:

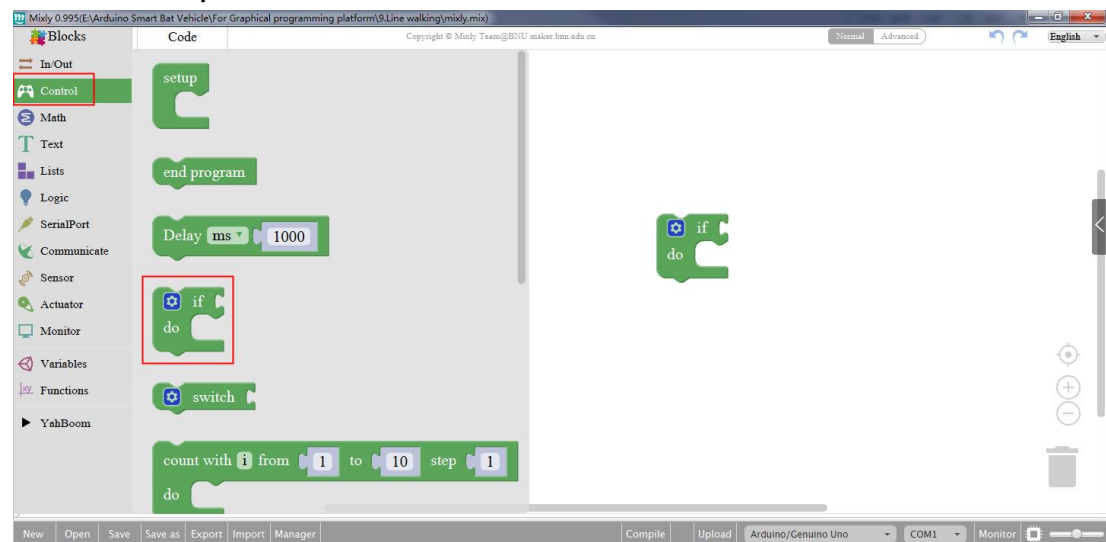


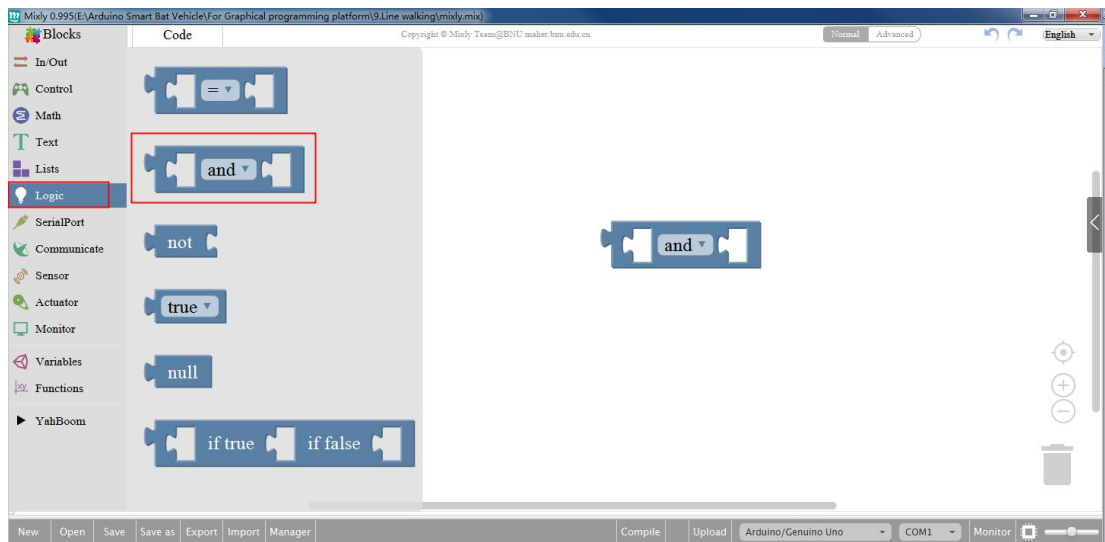


2 .Experiment



(1) Complete the connection of modules and click the button “Compile”. You can see “Compile success” in the dialog window until compile completed. If you see “Compile failed” means that there is something wrong with the connection of modules.Check and fix it.

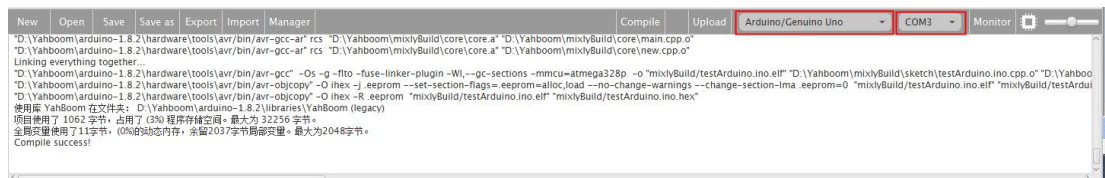

(2)Choose “**Arduino/Genuino Uno**” and correct serial port as shown.

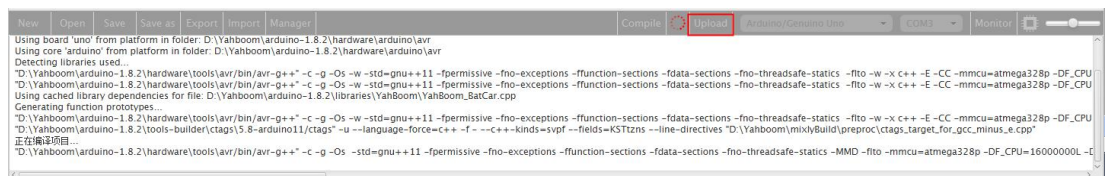

(3) Now that configuration is complete, you can click the button “Upload”.



(4) Finally, It's done if you see “Upload success” in the dialog window. Now unplug the USB line and debugging. After that, place the BatCar on track. Power on, it will go along the line.

Debugging:

① Adjust potentiometer [SW3] to make photoelectric sensor [P3] against white undersurface, then LED light [L3] illuminates while against black undersurface, LED light [L3] goes off.

② Adjust potentiometer [SW4] to make photoelectric sensor [P2] against white undersurface, then LED light [L2] illuminates while against black undersurface, LED light [L2] goes off.

Caution : Don't excessively rotate potentiometer while adjusting. It should be within 30°.

