


6、infrared obstacle avoidance 1(basic obstacle avoidance)

You need to follow the steps below to build blocks.



Material object wiring diagram:

4.3 Infrared obstacle avoidance wiring diagram

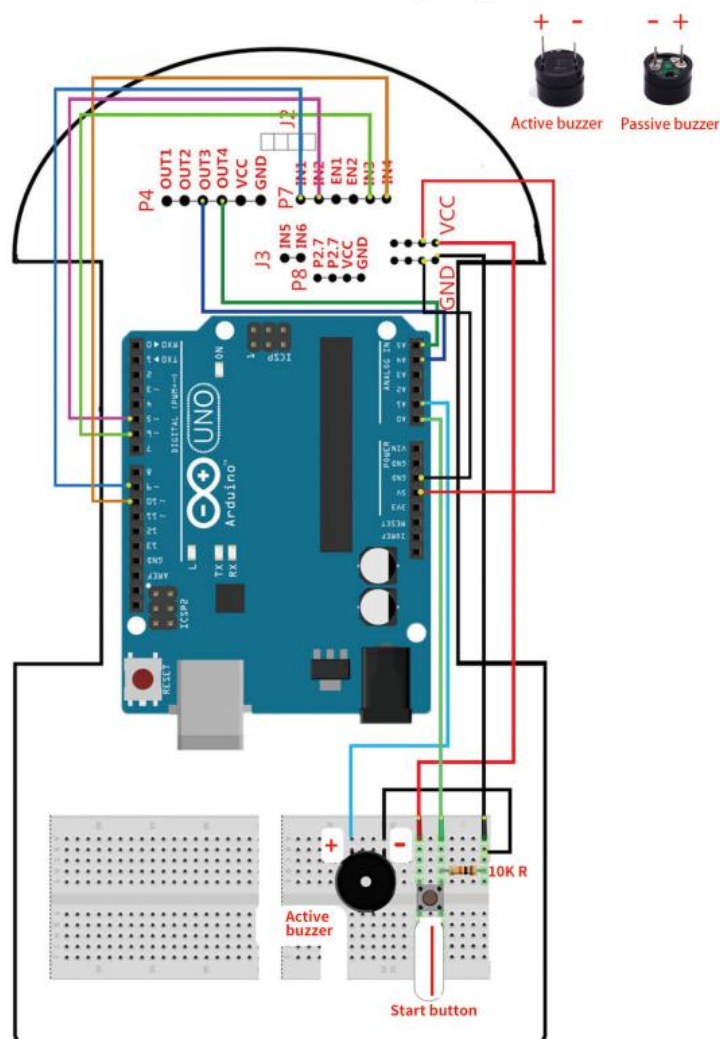


According to the wiring diagram, the smart car can realize infrared obstacle avoidance and infrared follow-up functions after uploading the corresponding program. Before the experiment, please refer to (III. Functions of Usage Instructions).

Steps of experiment:

1. You need to choose the building blocks which you need for this experiment, as shown in the figure below.



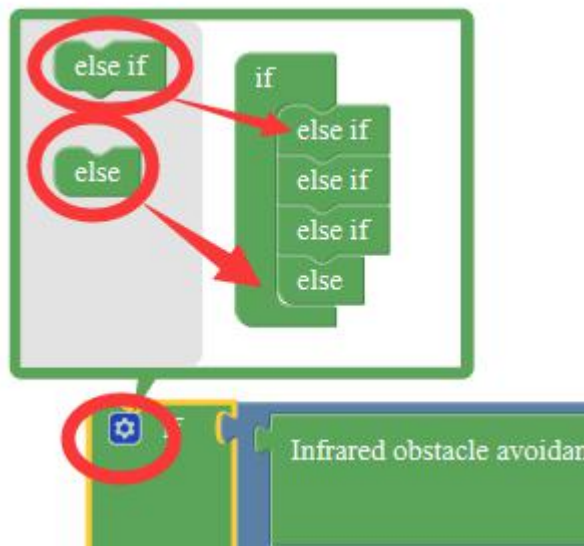


2.You need to combine the selected blocks, as shown in the figure below.




3.You need to you need to click “**Compile**”. and wait for the completion of the compiler, the following box will prompt the compiler successfully, if prompt the compile failure is the problem of building block splicing.




4. After the compilation is completed, the word “**Compile success!**” will appear in the lower left corner, indicating that you have successfully compiled the program.

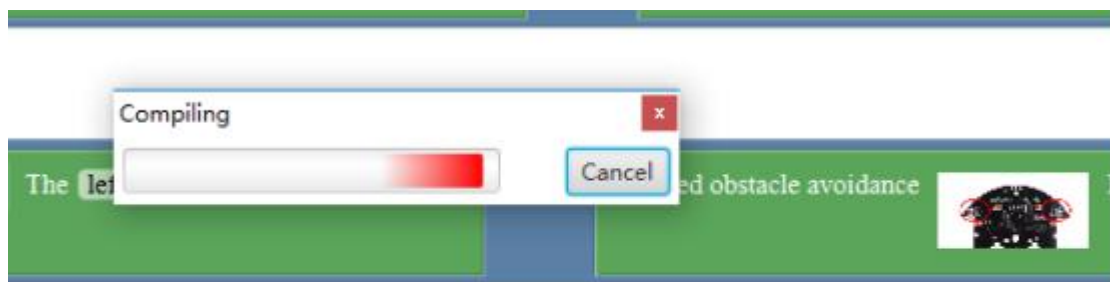


5. In the menu bar of Mixly, we need to select the port that the serial number displayed by the device manager (for example: COM6) and **Arduino/Genuino Uno**. As shown in the figure below.

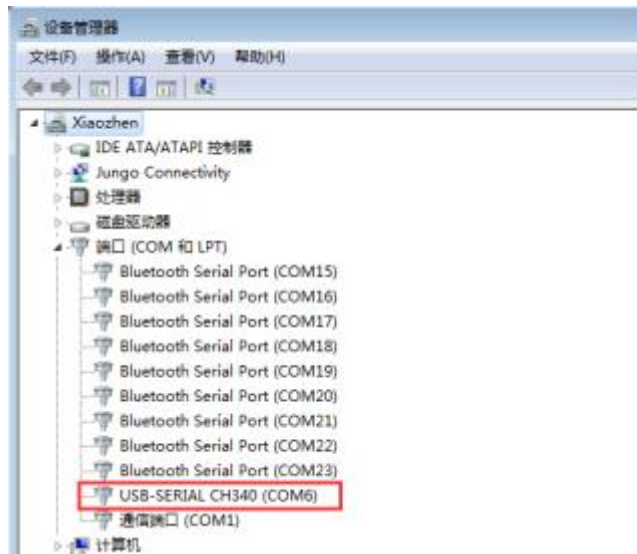

6. After the selection is completed, you need to click “**Upload**” to upload the code to the Arduino UNO board. When the word “**Upload success**” appears in the lower left corner, the code has been successfully uploaded to the Arduino UNO board, as shown in the figure below.

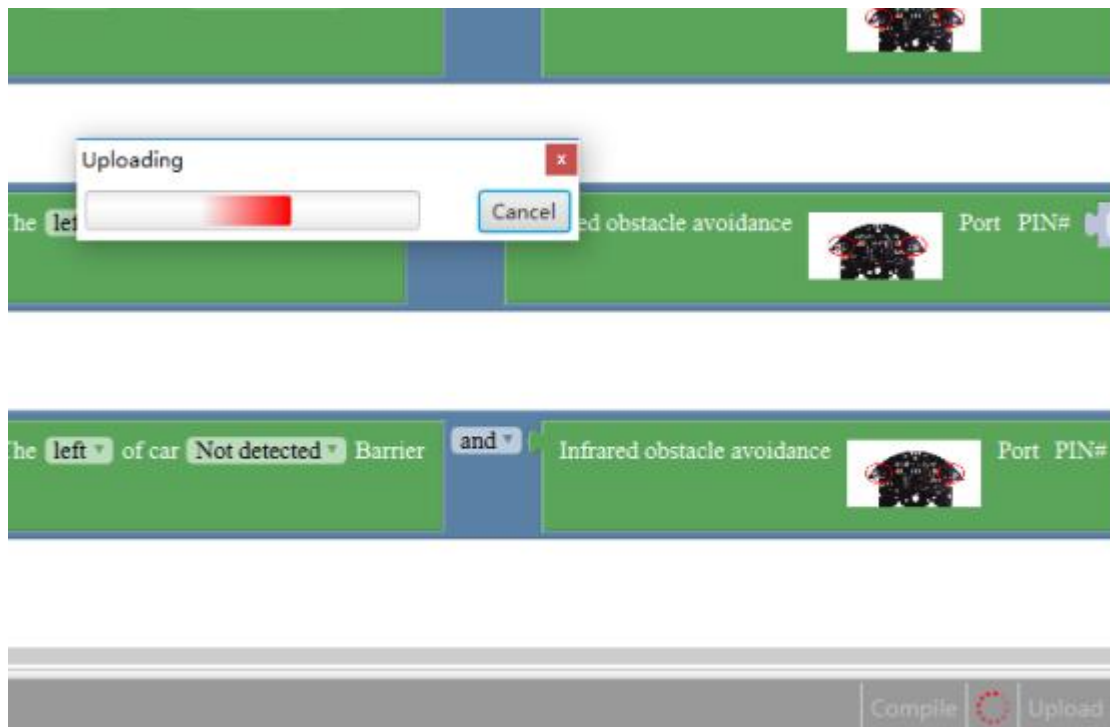

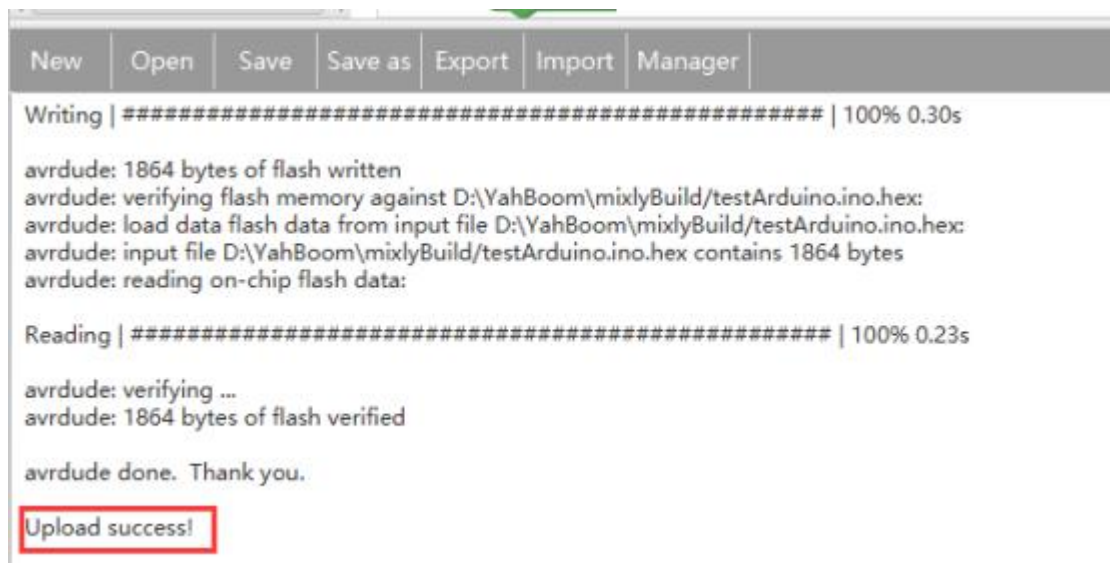

The screenshot shows the Arduino IDE interface. At the top is a menu bar with 'New', 'Open', 'Save', 'Save as', 'Export', 'Import', and 'Manager'. Below the menu bar is a status bar showing 'Writing | ##### | 100% 0.30s'. The main text area contains the following output from the avrdude command:

```
avrdude: 1864 bytes of flash written
avrdude: verifying flash memory against D:\YahBoom\mixlyBuild/testArduino.ino.hex:
avrdude: load data flash data from input file D:\YahBoom\mixlyBuild/testArduino.ino.hex:
avrdude: input file D:\YahBoom\mixlyBuild/testArduino.ino.hex contains 1864 bytes
avrdude: reading on-chip flash data:

Reading | ##### | 100% 0.23s

avrdude: verifying ...
avrdude: 1864 bytes of flash verified

avrdude done. Thank you.
```

At the bottom of the text area, the message 'Upload success!' is displayed and highlighted with a red rectangular border.

7. After the code is uploaded, the car can complete the infrared obstacle avoidance experiment.