


Course 9--Light controlled sound

You need to follow the steps below to build blocks.

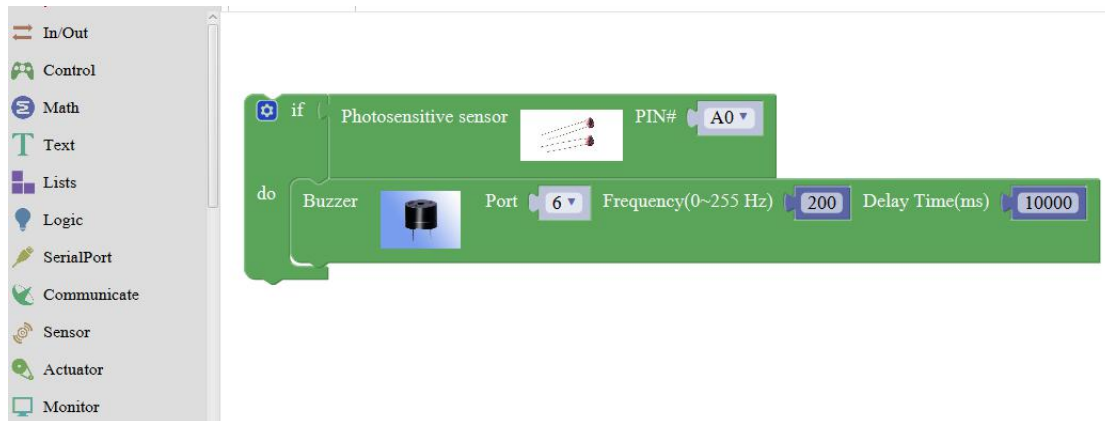

List of components required for the experiment:

Arduino UNO board *1

USB cable *1

Photosensitive resistor *1


Active buzzer *1

Breadboard *1

Dupont line *1 bunch




Actual object connection diagram:

We need to connect the circuit as shown in the figure below.

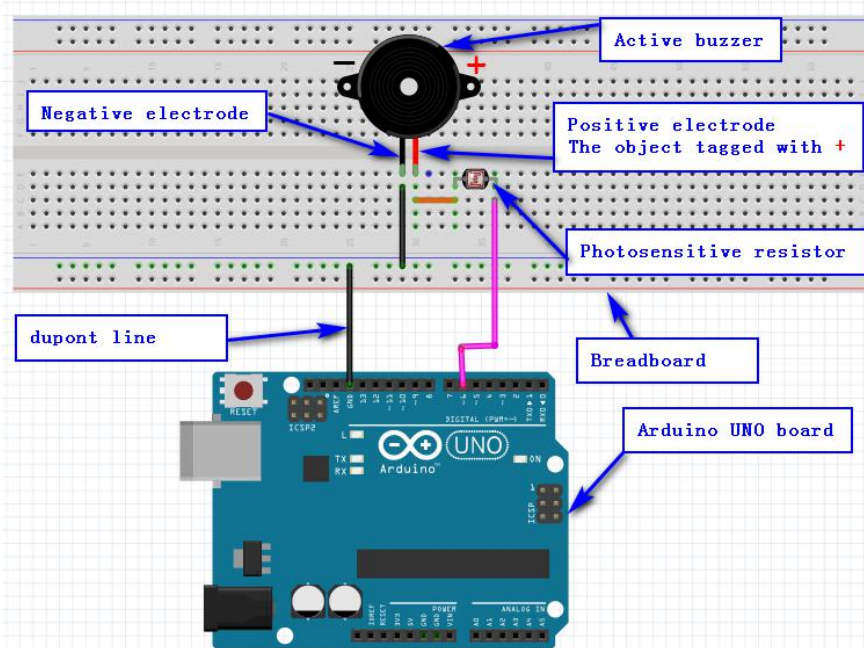


Steps of experiment:

1. You need to choose the building blocks which you need for this experiment, as shown in the figure below.

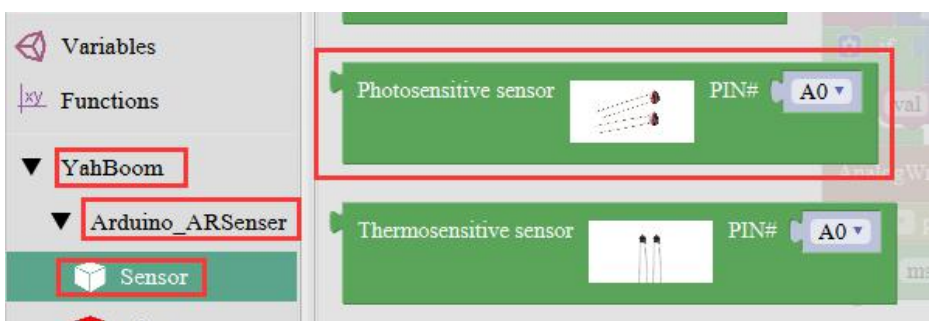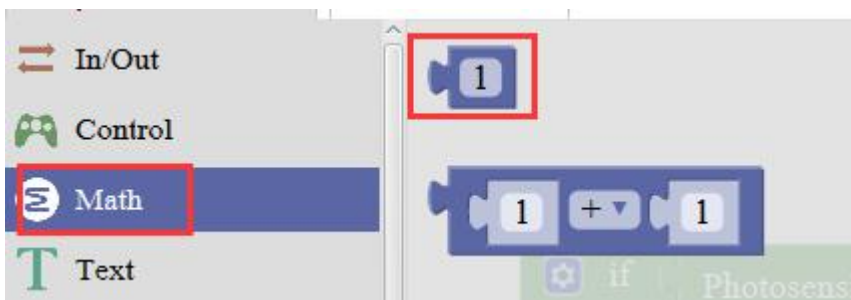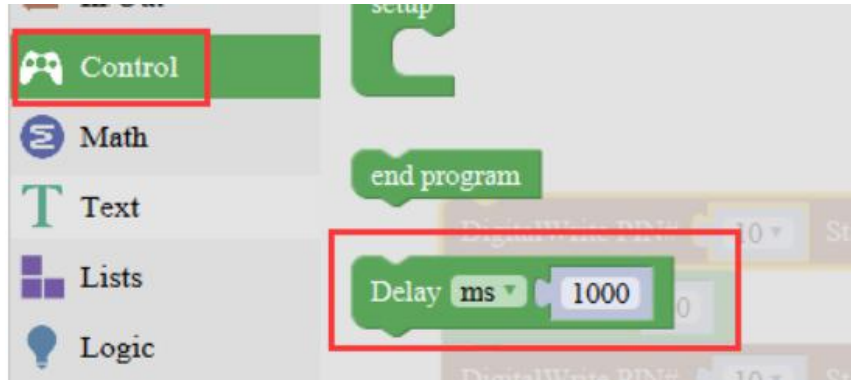



2.You need to combine the selected blocks, as shown in the figure below.

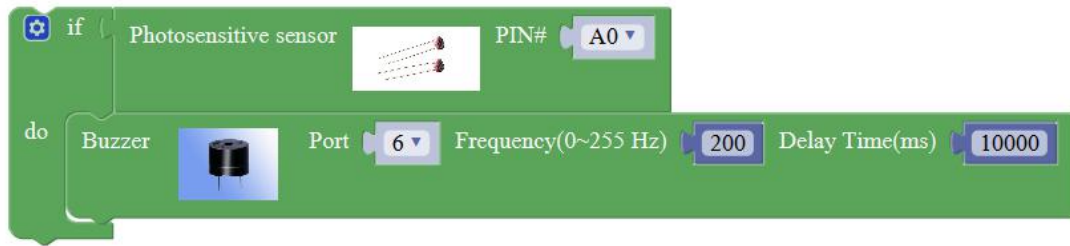


3. You need to click “**Compile**”. and wait for the completion of the compiler, the following box will prompt the compiler successfully, if prompt the compile failure is the problem of building block splicing.




4. After the compilation is completed, the word “**Compile success!**” will appear in the lower left corner, indicating that you have successfully compiled the program.

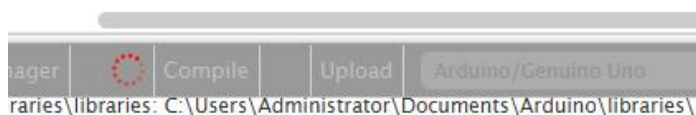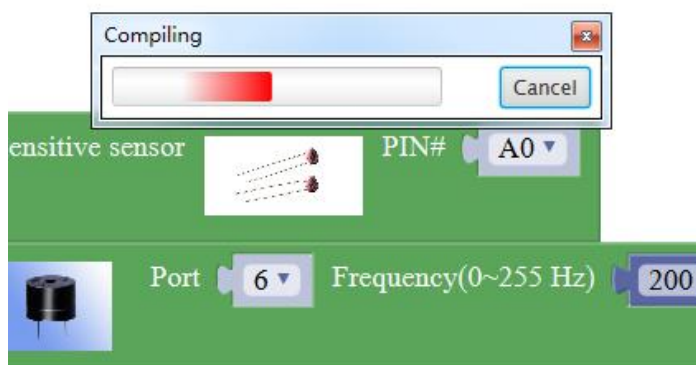

5. In the menu bar of Mixly, we need to select the port that the serial number displayed by the device manager (for exmaple:COM6) and **Arduino/Genuino Uno**. As shown in the figure below.

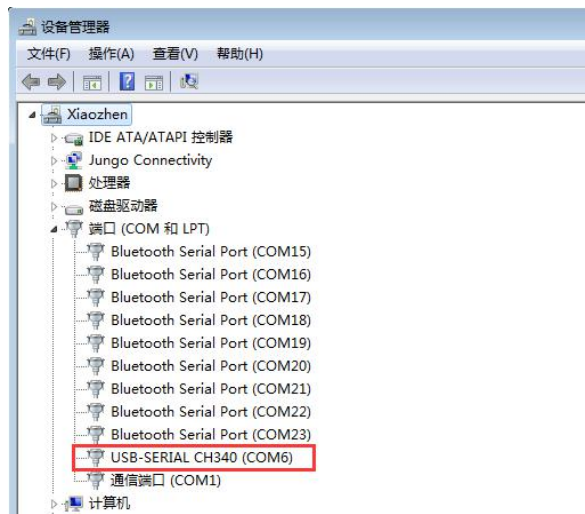

6. After the selection is completed, you need to click “**Upload**” to upload the code to the Arduino UNO board. When the word “**Upload success**” appears in the lower left corner, the code has been successfully uploaded to the Arduino UNO board, as shown in the figure below.

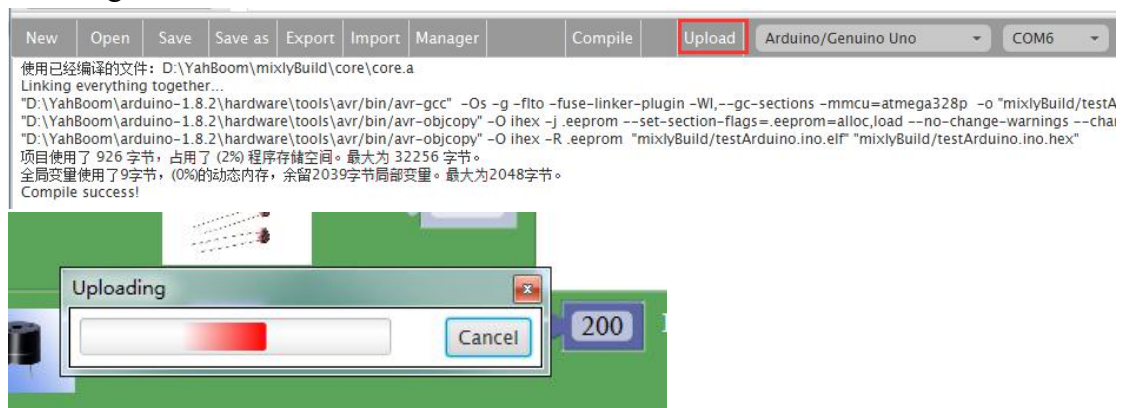



7. After the code is uploaded. When the photoresistor receives illumination, you can hear the buzzer sound. When the light is removed, the buzzer does not sound. The reason for this phenomenon is that the light change the resistance of the photoresistor.

