

tag identification

Quick use

1. Power on DOGZILLA

First, we turn on the switching power supply of the mechanical dog and start the mechanical dog



After starting, we can view the IP address on the small screen of the robot dog.


2. Start DOGZILLA chassis

PI4 version steps:

Then use the ssh terminal to connect to the robot dog.

Note: The IP address used when writing this tutorial: 192.168.2.102 User name: pi Password: yahboom The actual IP address shall prevail when used.

Open the shell tool. The shell tool I use here is FinalShell. Enter username, password, port, connection name and other information.

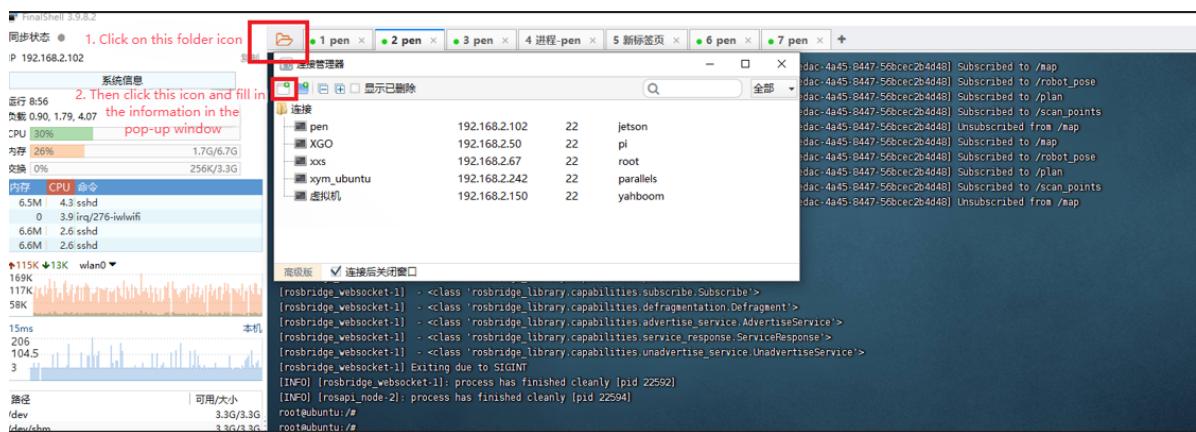

```
Finalshell 3.9.8.2
同步状态 1. Click on this folder icon
IP: 192.168.2.102
2. Then click this icon and fill in
the information in the
pop-up window

系统信息
运行: 8:56
负载: 0.90, 1.79, 4.07
CPU: 30%
内存: 26% 1.7G/6.7G
交换: 0% 256K/3.3G

内存 CPU 命令
6.5M 4.3 sshd
0 3.9 irq/276-iwlwifi
6.6M 2.6 sshd
6.6M 2.6 sshd

↑115K ↓13K wlan0
169K
117K
58K


15ms 206
104.5
3

路径 可用/大小 /dev/shm 3.3G/3.3G
/dev/shm


连接管理器
连接
笔 192.168.2.102 22 jetson
XGO 192.168.2.50 22 pi
xos 192.168.2.67 22 root
xym_ubuntu 192.168.2.242 22 parallels
虚拟机 192.168.2.150 22 yahboom

高级版 连接后关闭窗口
[rosbridge_websocket-1]: <class 'rosbridge_library.capabilities.subscribe.Subscribe'>
[rosbridge_websocket-1]: <class 'rosbridge_library.capabilities.defragmentation.Defragment'>
[rosbridge_websocket-1]: <class 'rosbridge_library.capabilities.advertise_service.AdvertiseService'>
[rosbridge_websocket-1]: <class 'rosbridge_library.capabilities.service_response.ServiceResponse'>
[rosbridge_websocket-1]: <class 'rosbridge_library.capabilities.unadvertise_service.UnadvertiseService'>
[rosbridge_websocket-1]: Exiting due to SIGINT
[INFO] [rosbridge_websocket-1]: process has finished cleanly [pid 22592]
[INFO] [rosapi_node-2]: process has finished cleanly [pid 22594]
root@ubuntu:/#
```


Select ssh connection to create a new ssh connection

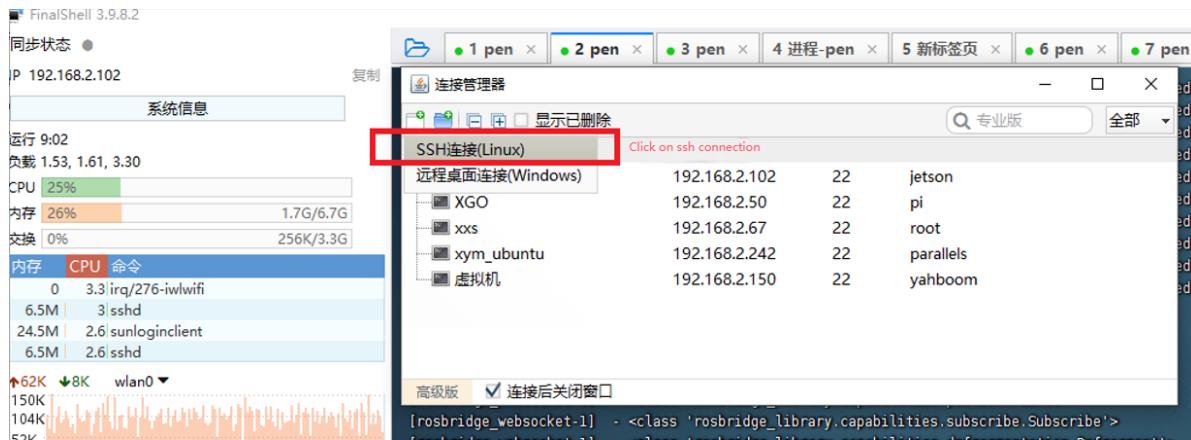

Here the username is pi, the password is yahboom, and the ip address is the IP address of the real robot dog.

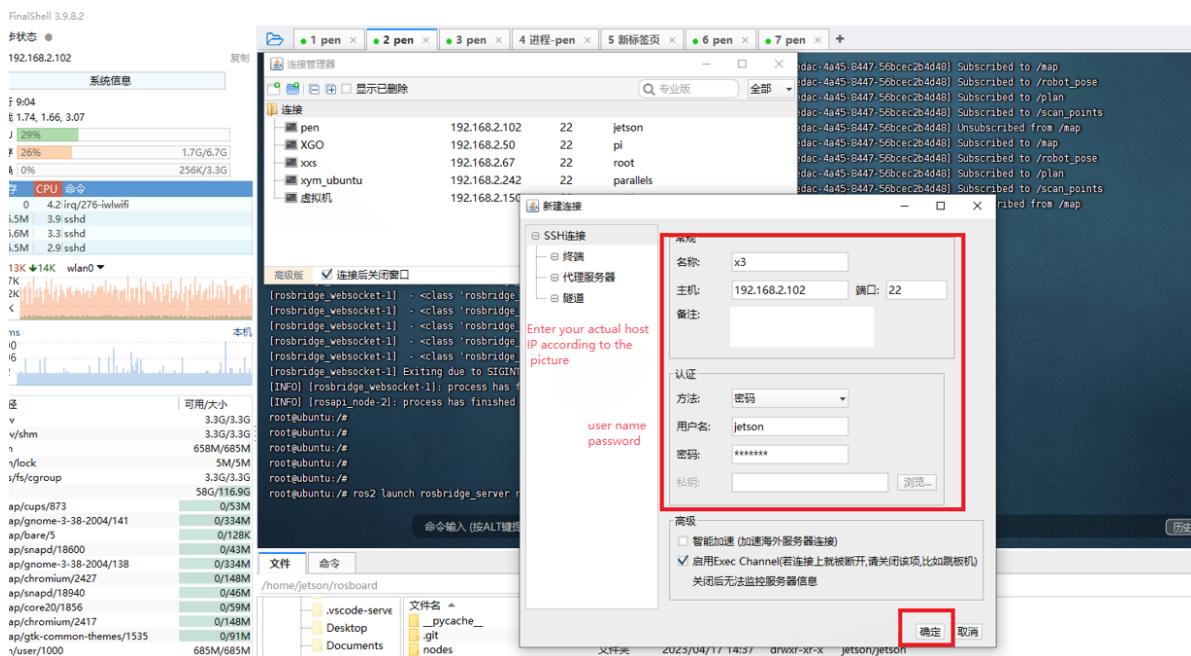

Select the ssh connection you just created here.

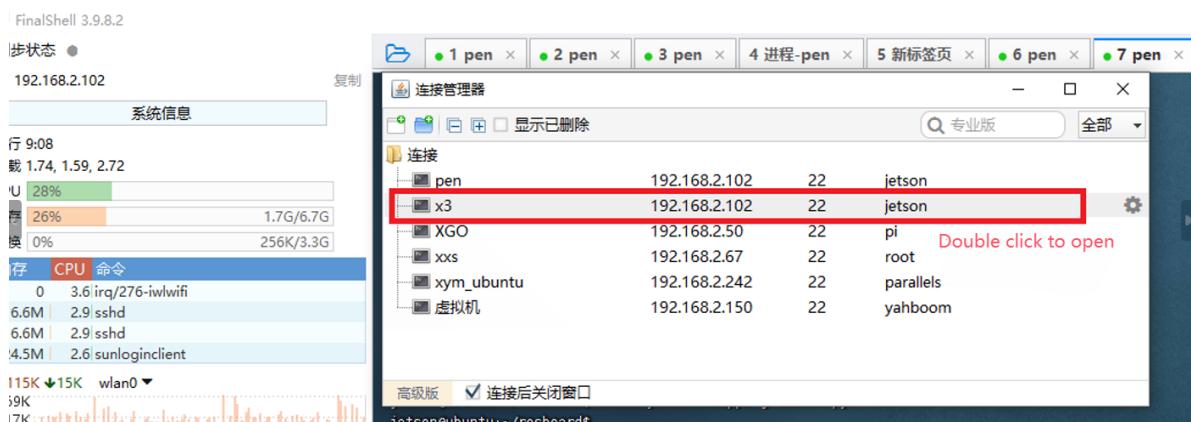


Enter the command in the terminal to start the chassis task.

```
sudo systemctl restart YahboomStart.service
```

```
pi@yahboom:~$  
pi@yahboom:~$  
pi@yahboom:~$  
pi@yahboom:~$  
pi@yahboom:~$ sudo systemctl restart YahboomStart.service
```

PI5 version steps:

After the mechanical dog is started, use the vnc software to remotely connect to the mechanical dog through the IP address on the OLED (**For specific steps, please see "Remote Login Operation"**).

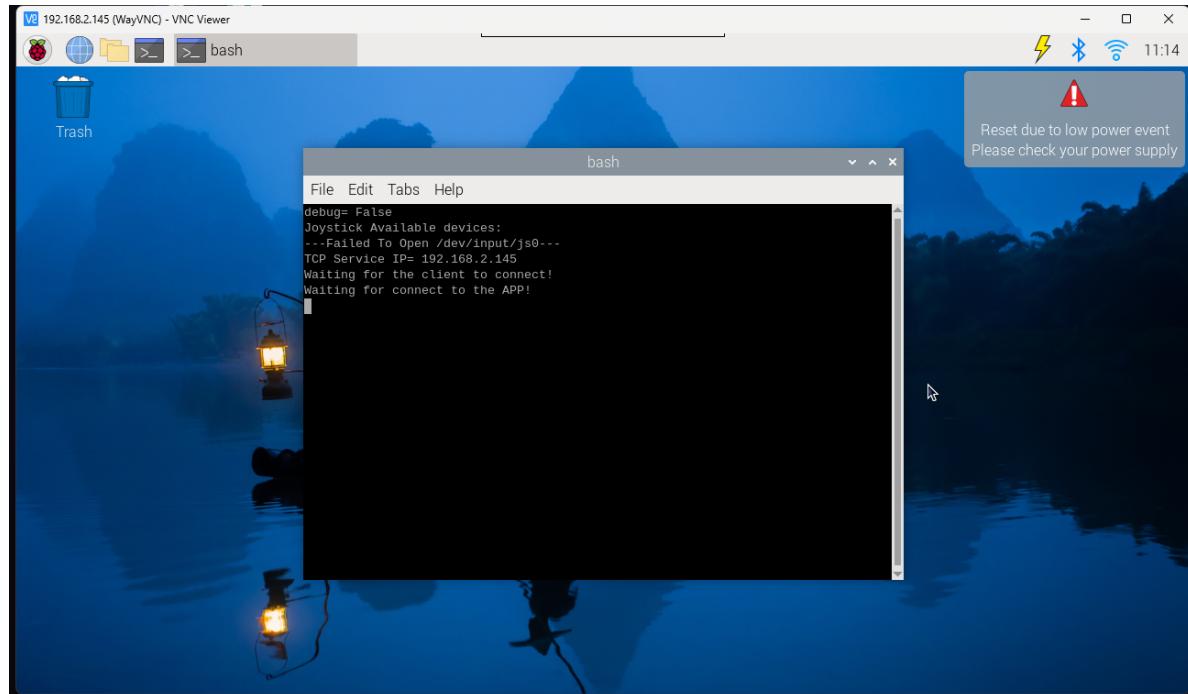

Then **ctrl+c** closes the large program and enter the following command to enter docker:

```
./run_humble.sh
```

```
TCP Service IP= 192.168.2.145  
Waiting for the client to connect!  
Waiting for connect to the APP!  
^CKeyboardInterrupt  
2024-04-28T10:17:27Z  
-----program end-----  
pi@raspberrypi:~ $ ./run_humble.sh  
access control disabled, clients can connect from any host  
root@raspberrypi:/#
```

Then enter the following commands in the docker terminal to start the car radar, imu, and mechanical dog joint status nodes.

```
ros2 launch bringup Navigation_bringup.launch.py
```

```
root@raspberrypi: /  
File Edit Tabs Help  
at 0x7fff363522f0>  
[yahboomcar_joint_state-3] [13.16, 45.61, 1.34, 10.1, 44.36, -1.09, 10.1, 51.85,  
2.55, 6.53, 51.22, -0.36]  
[yahboomcar_joint_state-3] &&&&&&&&&&&&&&&&& 0.10927200317382812  
[yahboomcar_joint_state-3] #####  
[yahboomcar_joint_state-3] [-0.17585449218750002, -0.13996582031250002, -9.72702  
63671875, -1.0365853658536586, -0.426829268292683, -0.6097560975609757, 0.010487  
360583411322, -0.02726797640323639, 5.983139933268229]  
[yahboomcar_joint_state-3] ***** <rclpy.timer.Timer object  
at 0x7fff363522f0>  
[yahboomcar_joint_state-3] [13.16, 45.61, 1.34, 10.1, 44.36, -1.09, 10.1, 51.85,  
2.55, 6.53, 51.22, -0.36]  
[yahboomcar_joint_state-3] &&&&&&&&&&&&&&&&& 0.10969948768615723  
[yahboomcar_joint_state-3] #####  
[yahboomcar_joint_state-3] [-0.14475097656250002, -0.131591796875, -9.7401855468  
75, -1.0975609756097562, -0.3658536585365854, -0.6097560975609757, 0.01022947788  
9007993, -0.02749979310565525, 5.983139933268229]  
[yahboomcar_joint_state-3] ***** <rclpy.timer.Timer object  
at 0x7fff363522f0>  
[yahboomcar_joint_state-3] [13.16, 45.61, 1.34, 10.1, 44.36, -1.09, 10.1, 51.85,  
2.55, 6.53, 51.22, -0.36]  
[yahboomcar_joint_state-3] &&&&&&&&&&&&&&&&& 0.10920882225036621  
[yahboomcar_joint_state-3] #####
```

3. Start the image publishing node

PI4 version steps:

First enter the following two commands in the terminal

```
export PATH=/home/pi/opencv_install/bin:$PATH  
export LD_LIBRARY_PATH=/home/pi/opencv_install/lib:$LD_LIBRARY_PATH
```

Then enter the following command in the terminal

```
cd cartographer_ws2/
```

```
source install/setup.bash
```

```
pi@yahboom:~$ cd cartographer_ws2/  
pi@yahboom:~/cartographer_ws2$  
pi@yahboom:~/cartographer_ws2$  
pi@yahboom:~/cartographer_ws2$ source install/setup.bash  
pi@yahboom:~/cartographer_ws2$
```

Then enter the following command

```
ros2 run yahboom_qrcode yahboom_qrcode_node
```

```

pi@yahboom:~/cartographer_ws2$ ros2 run xgo_qrcode xgo_qrcode_node
[ WARN:0@0.334] global cap_gstreamer.cpp:2784 handleMessage OpenCV | GStreamer warning: Embedded video playback halted; module source reported: Could not read from resource.
[ WARN:0@0.335] global cap_gstreamer.cpp:1679 open OpenCV | GStreamer warning: unable to start pipeline
[ WARN:0@0.336] global cap_gstreamer.cpp:1164 isPipelinePlaying OpenCV | GStreamer warning: GStreamer: pipeline have not been created
A demo program of WeChat QRCode Detector:

-----
1111,here.
-----

init,fov.0.997839
init111,foh. 0.707185

```

PI5 version steps:

Enter in the root directory of the Raspberry Pi and enter the same terminal

```

docker ps
docker exec -it id /bin/bash

```

```

pi@raspberrypi:~ $ docker ps
CONTAINER ID        IMAGE               COMMAND      CREATED
STATUS              PORTS               NAMES
c06cd712e14e        yahboomtechnology/ros-humble:3.1   "/bin/bash"   24 minutes ago
Up 24 minutes          nice_keldysh
pi@raspberrypi:~ $ docker exec -it c06c /bin/bash
root@raspberrypi:#

```

Then enter the following command

```
ros2 run yahboom_qrcode yahboom_qrcode_node
```

```

root@raspberrypi:/# ros2 run yahboom_qrcode yahboom_qrcode_node
[ WARN:0] global ./modules/videoio/src/cap_gstreamer.cpp (2075) handleMessage OpenCV | GStreamer warning: Embedded video playback halted; module source reported: Could not read from resource.
[ WARN:0] global ./modules/videoio/src/cap_gstreamer.cpp (1053) open OpenCV | GStreamer warning: unable to start pipeline
[ WARN:0] global ./modules/videoio/src/cap_gstreamer.cpp (616) isPipelinePlaying OpenCV | GStreamer warning: GStreamer: pipeline have not been created
A demo program of WeChat QRCode Detector:

-----
1111,here.
-----


init,fov.0.997839
init111,foh. 0.707185

```


5. Set the recognition color through the web interface


The steps are the same for PI4 and PI5 versions:

Open the virtual machine and enter the user name yahboom and the password yahboom.

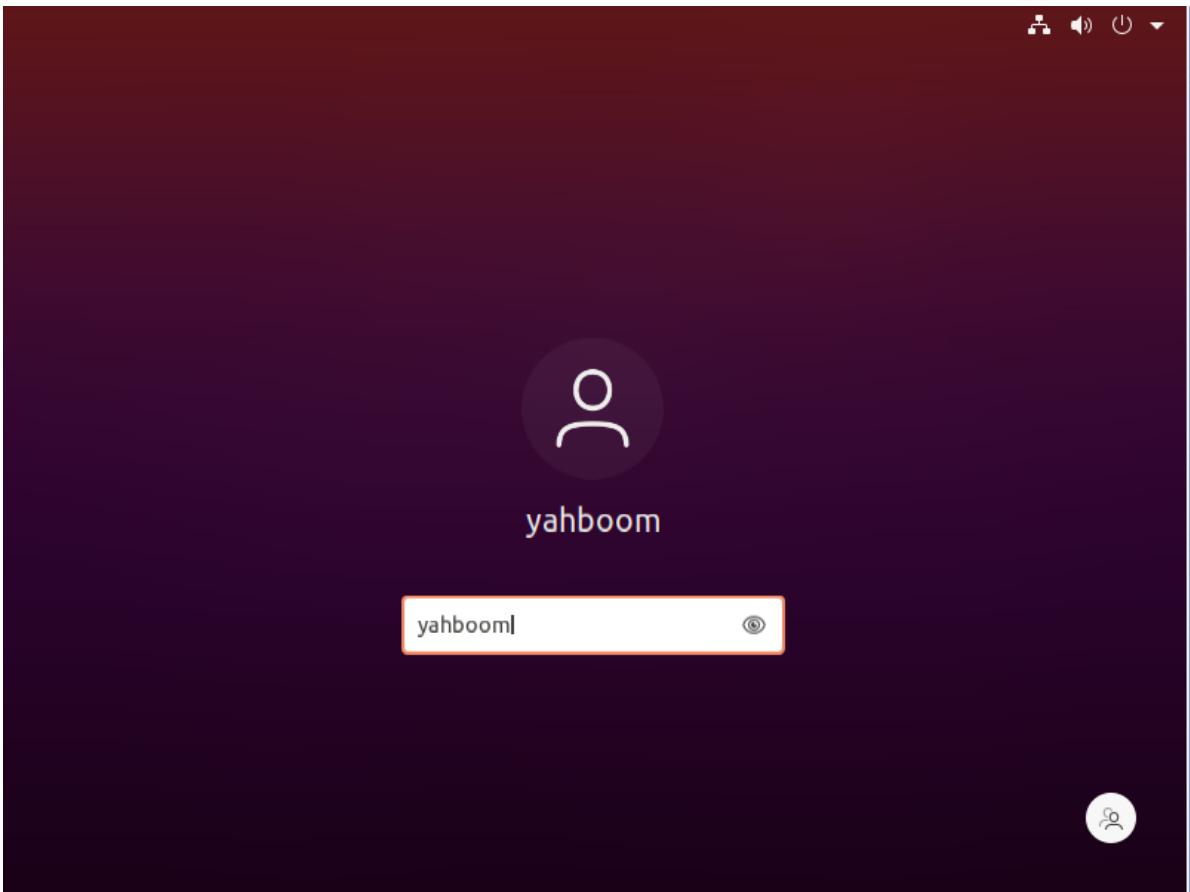


Click on the folder to open the cartoros2 folder.

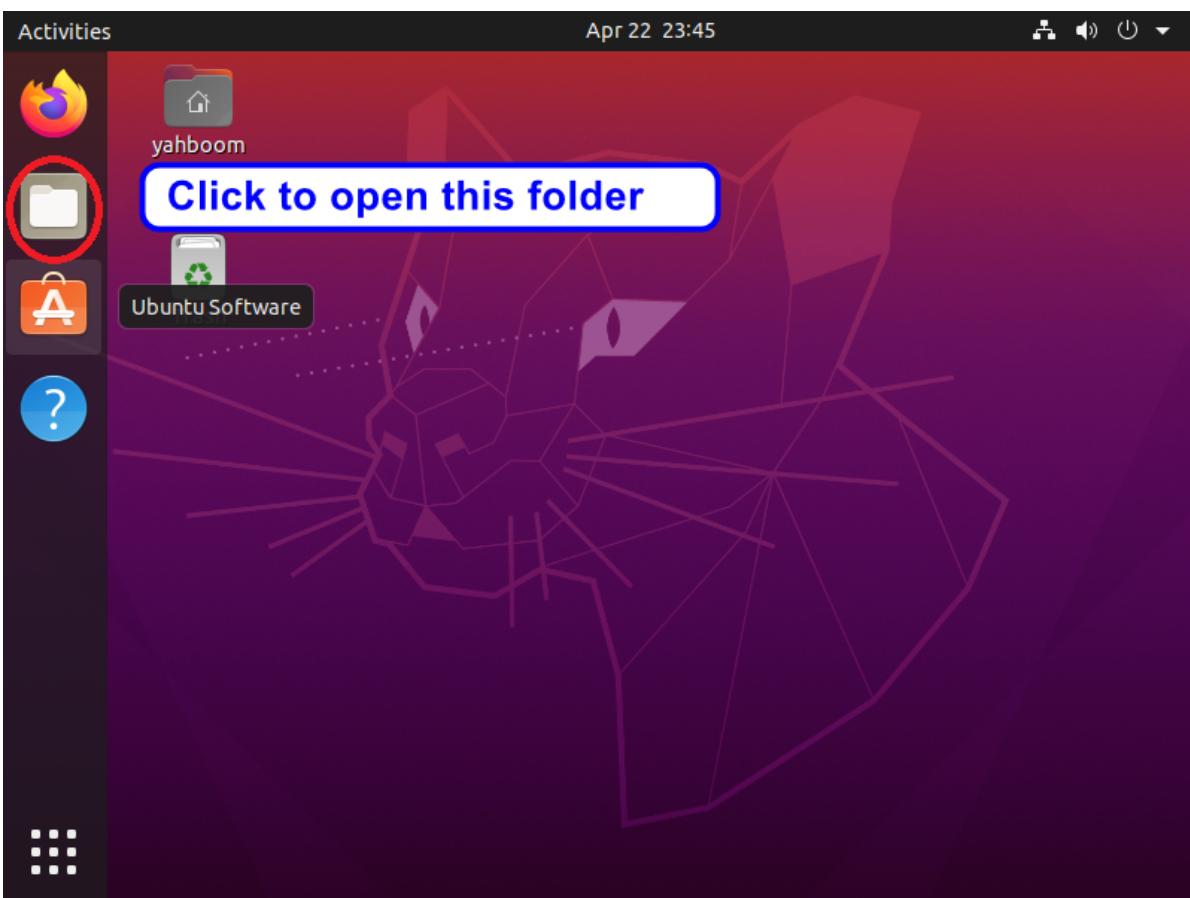

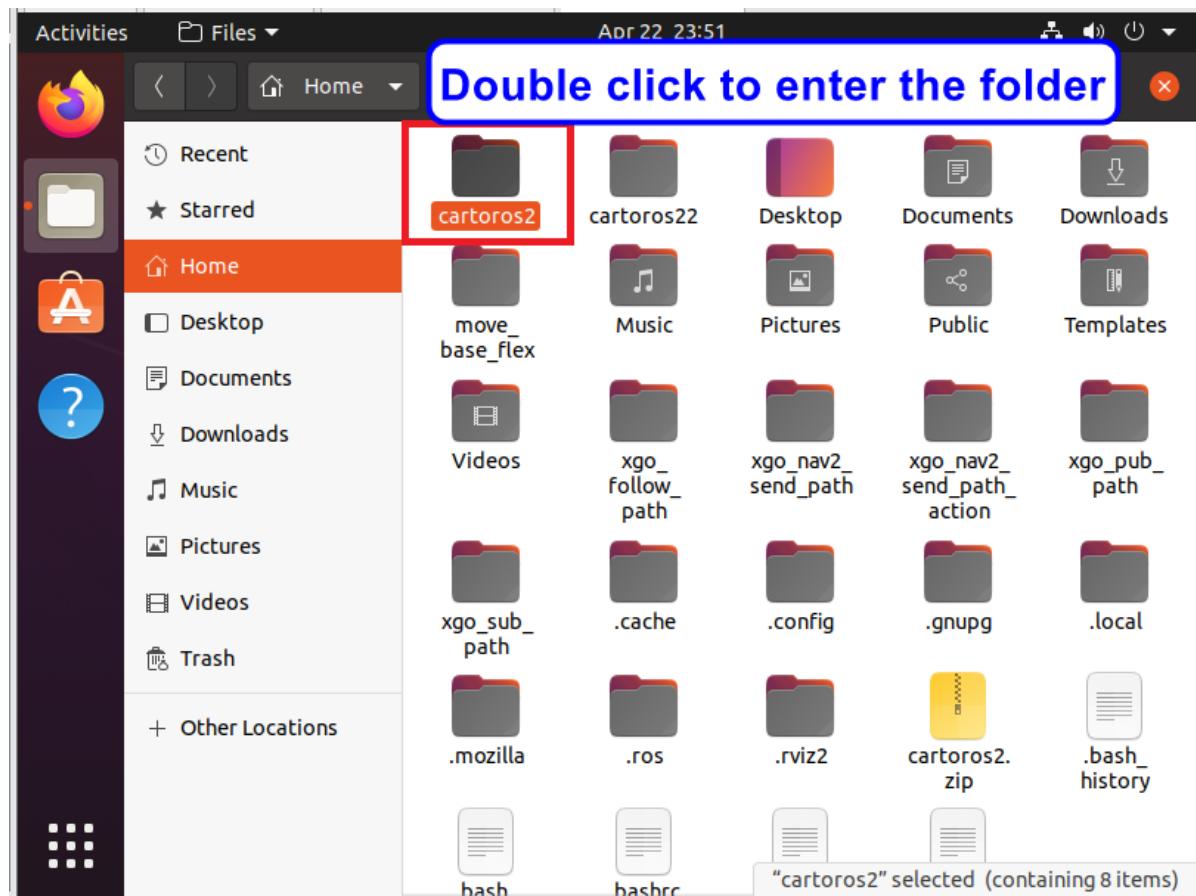


Open the terminal under the folder

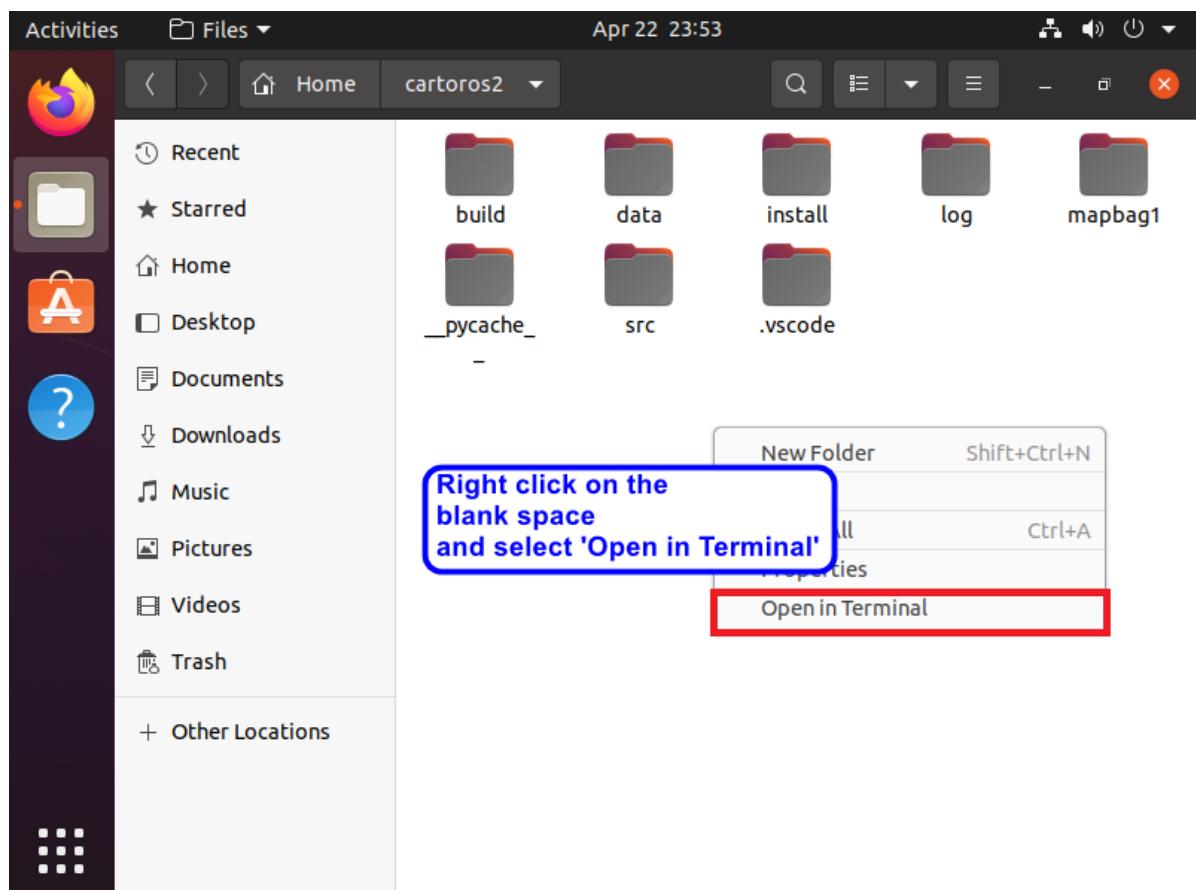


Then enter the following command

```
source install/setup.bash
```

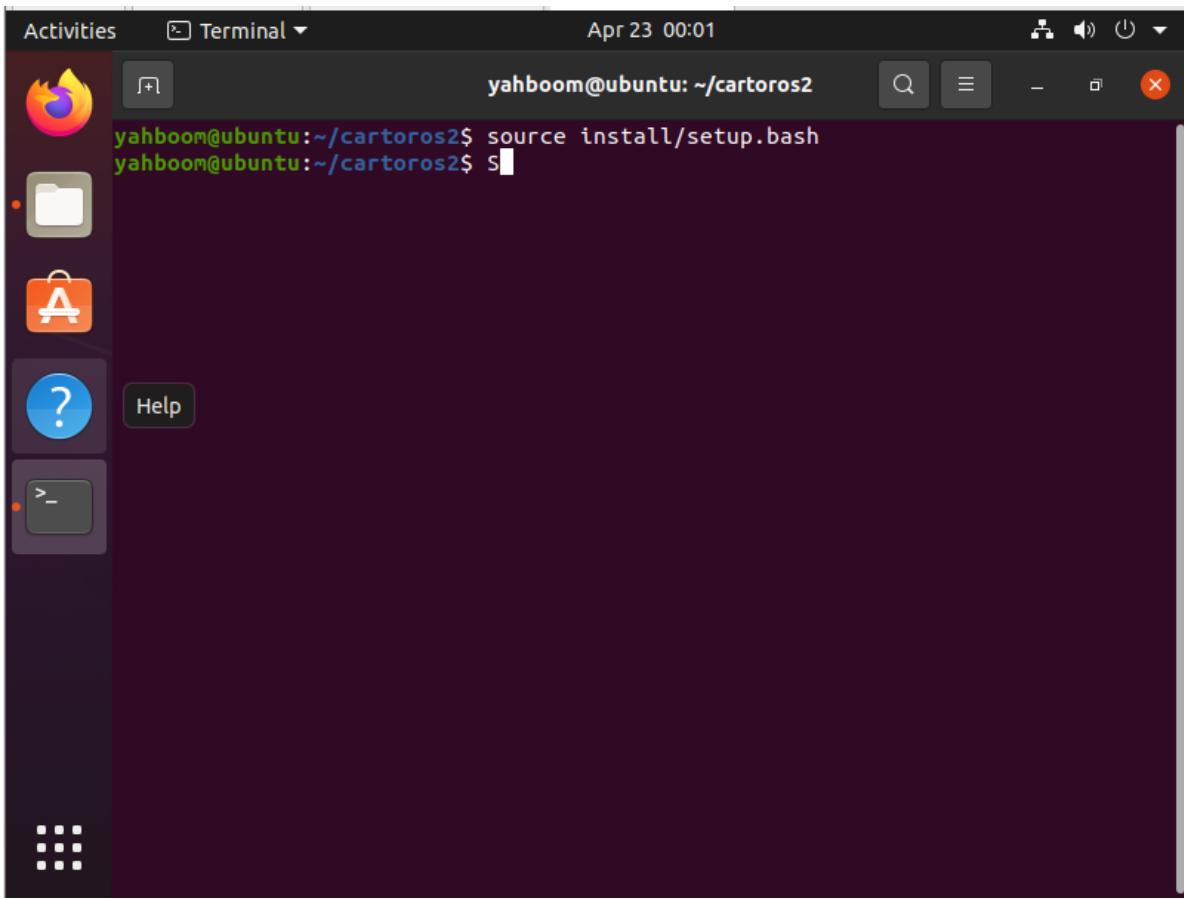


Then start rosbridge and enter the following command

```
ros2 launch rosbridge_server rosbridge_websocket_launch.xml
```

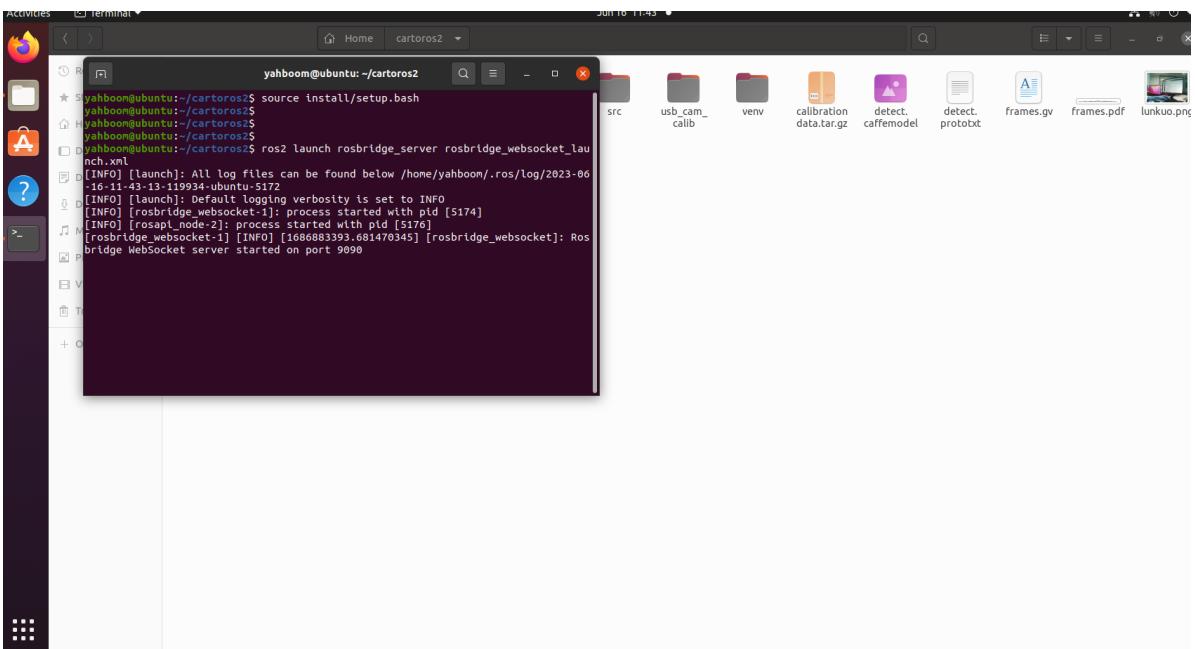

Find the blank.html file in the eb folder in the root directory of this tutorial and open it with Google Chrome.

Note: The IP address of rosbridge needs to be set here. Obtain the IP address of the virtual machine, then open the blank.html file, modify the IP address of line 363 and save it, as shown in the figure below.

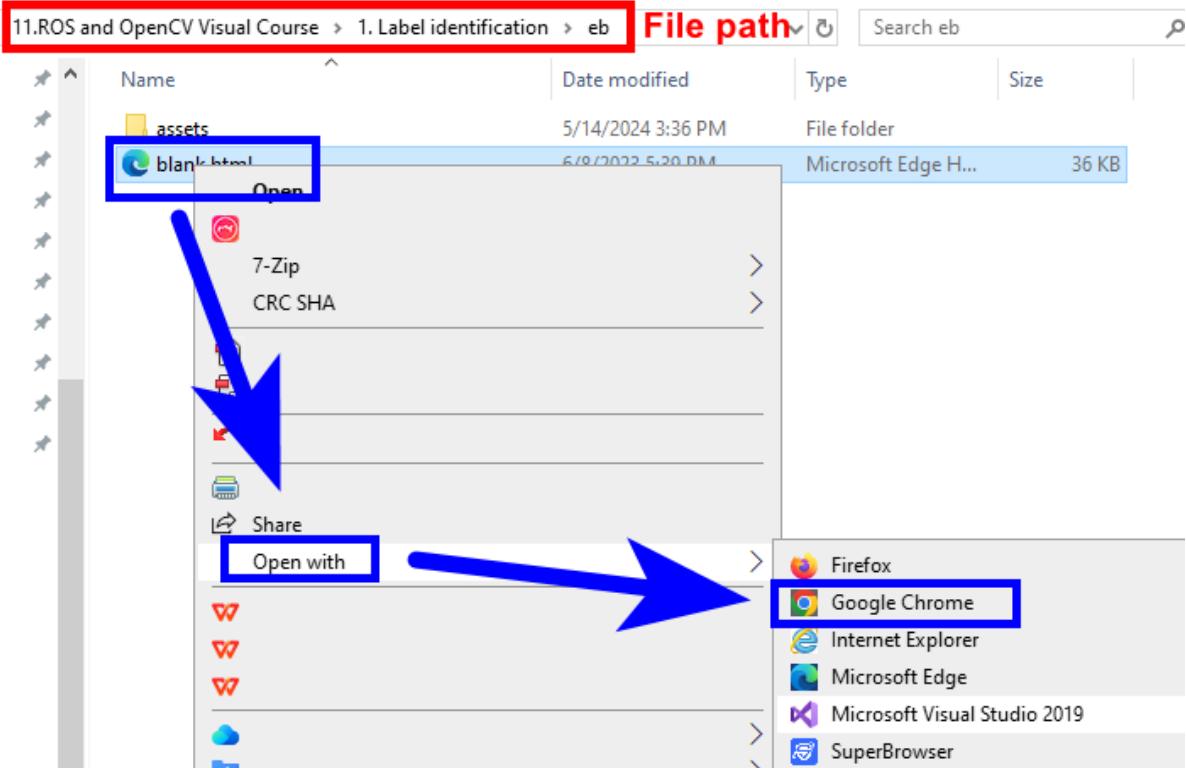

blank.html

```


C:\Users\Admin\Desktop\git\XGO\ROS教程\ROS+OpenCV视觉教程>标签追踪>eb>blank.html>html>body>script
345
346
347
348     </div>
349
350     </div>
351     <script src="assets/js/roslib.js"></script>
352     <script src="assets/js/alpine.js"></script>
353     <script src="assets/js/perfect-scrollbar.js"></script>
354     <script src="assets/js/choices.js"></script>
355     <script src="assets/js/chart.js"></script>
356     <script src="assets/js/apexchart.js"></script>
357     <script src="assets/js/quill.js"></script>
358     <script src="assets/js/rangeslider.min.js"></script>
359     <script src="assets/js/main.js"></script>
360
361
362
363     var ros = new ROSLIB.Ros({
364       url : 'ws://192.168.2.117:9990'
365     });
366
367     ros.on('connection', function() {
368       console.log('Connected to websocket server.');
369     });
370
371     ros.on('error', function(error) {
372       console.log('Error connecting to websocket server: ', error);
373     });
374
375     ros.on('close', function() {
376       console.log('Connection to websocket server closed.');
377     });
378     var imageLisener_compressed= new ROSLIB.Topic({
379       ros : ros,
380       name : '/image_raw/compressed',
381       messageType : 'sensor_msgs/msg/CompressedImage',
382       throttle_rate : 100
383     });
384     var that = this;
385     imageLisener_compressed.subscribe(function(data) {
386       // update the robot's position on the map

```


Change the IP address here to the actual IP address of the Rosb Ridge

① 在工作区的文件夹或打开的文件中找到了 git 存储库。是否要打开存储库?

来源: Git 扩展 始终 从不 行 357, 列 51 空格: 4 UTF-8 with BOM CRLF HTML

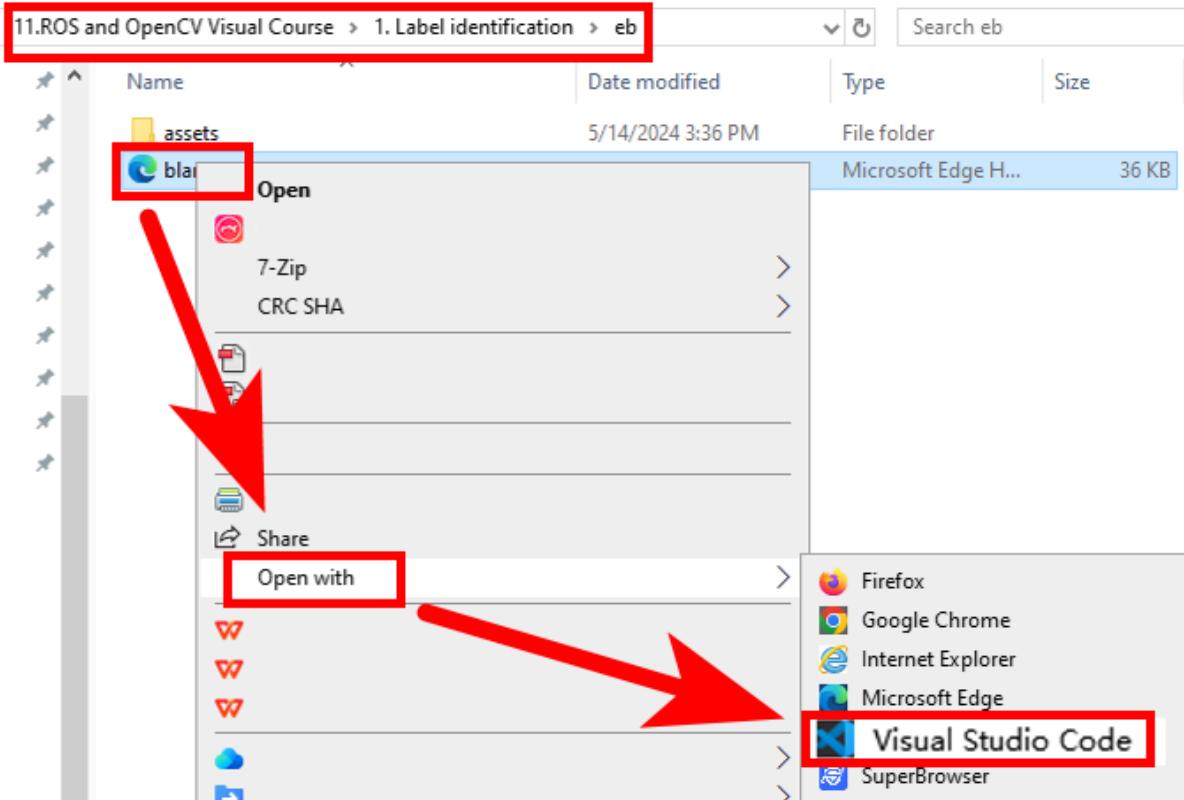

As shown in the picture below, use your mobile phone to display a QR code. Here is the WeChat QR code. You can see the picture transmitted by the camera and the recognized QR code data.

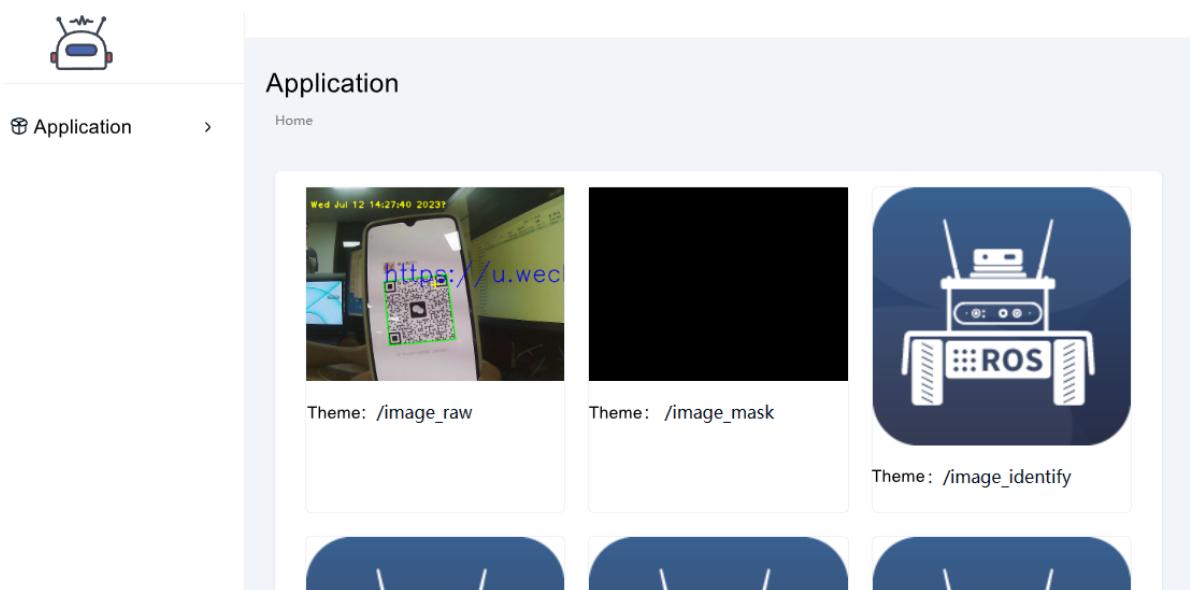

The recognized data will also be printed in the finalshell terminal.

```
11111,foh, 0.997839
https://u.wechat.com/EEEuAamYg9Afg0-ilKJK_tU
decode-1: https://u.wechat.com/EEEuAamYg9Afg0-ilKJK_tU
11111,here, %f315.052
11111,fov, %f0.707185
11111,foh, 0.997839
https://u.wechat.com/EEEuAamYg9Afg0-ilKJK_tU
decode-1: https://u.wechat.com/EEEuAamYg9Afg0-ilKJK_tU
11111,here, %f315.052
11111,fov, %f0.707185
11111,foh, 0.997839
https://u.wechat.com/EEEuAamYg9Afg0-ilKJK_tU
decode-1: https://u.wechat.com/EEEuAamYg9Afg0-ilKJK_tU
11111,here, %f308.66
11111,fov, %f0.707185
11111,foh, 0.997839
```

Identify the content of the QR code